


# CT-910

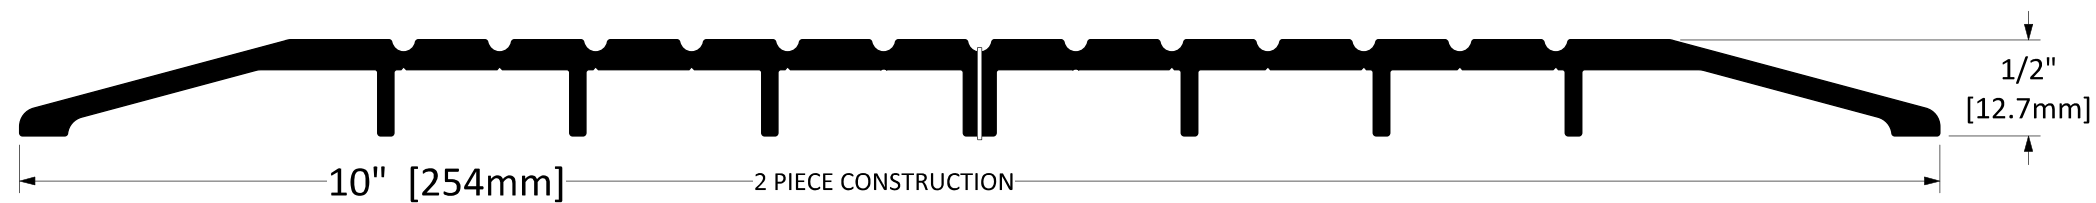

### Screw Options

**STANDARD**

SCREW TYPE: **G**  
 3/16" X 1-3/4" HI-LO TAPPING  
 THREAD, GREY PHILLIPS DRIVE,  
 CONCRETE SCREWS  
 (5/32" PRE-DRILL REQUIRED)

SCREW TYPE: **H**  
 #10 X 1-3/4" STAINLESS STEEL  
 FLAT HEAD, ROBERTSON DRIVE,  
 TYPE A SCREWS  
 (COMPLETE WITH NYLON ANCHOR)

**OPTIONAL**

SCREW TYPE: **I**  
 #10 X 2" STAINLESS STEEL FLAT  
 HEAD, TAMPER-RESISTANT TORX  
 DRIVE, TYPE A SCREWS  
 (COMPLETE WITH NYLON ANCHOR)

### Finish Options

- OPTIONAL STD**
- Mill Finish
  - Bronze Anodized
  - Black Anodized
  - Clear Anodized

<b>Operation</b>	Threshold
<b>Features</b>	<ul style="list-style-type: none"> <li>• Mill Finish Extruded Aluminum</li> </ul>
<b>Application</b>	<ul style="list-style-type: none"> <li>• Ideal for Residential, Commercial &amp; Industrial</li> </ul>

**Part No.:**

**Part Description:**

**Customer Name:**

**Job No./Name:**

**Date:**

**Provided By:**

**Notes:**