


CT-12

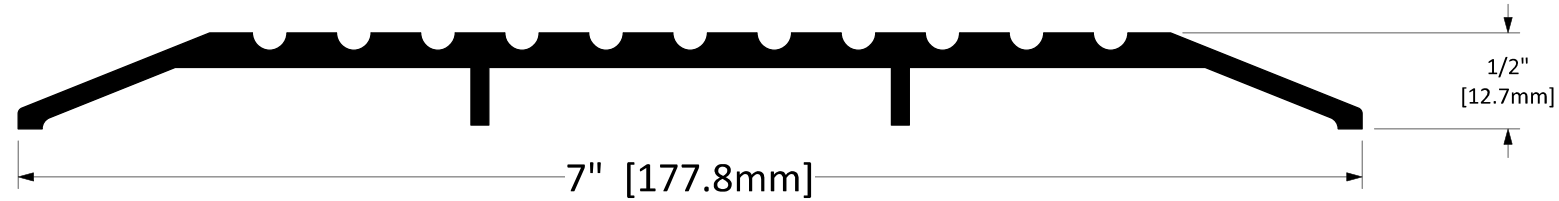

Finish Options

STD Mill Finish

Screw Options

Standard




Screw Type: **G**
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" Pre-Drill Required)

Optional



Screw Type: **H**
 #10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (Complete with Nylon Anchor)



Screw Type: **I**
 #10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (Complete with Nylon Anchor)

| Operation | Threshold |
|-------------|--|
| Features | <ul style="list-style-type: none"> Mill Finish Extruded Aluminum |
| Application | <ul style="list-style-type: none"> Ideal for Residential, Commercial & Industrial |

Customer Name: _____ Job No./Name: _____ Date: _____ Provided By: _____

Notes: