


CT-20/3A

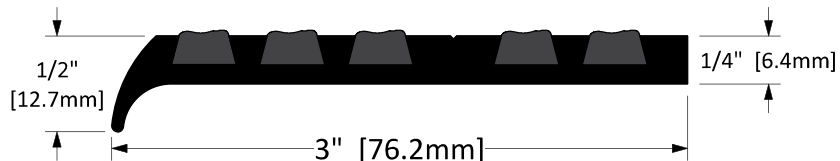


Finish Options

STD

Mill Finish


Screw Options

Standard



Screw Type: **G**
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
 Phillips Drive, Concrete Screws
 (5/32" Pre-Drill Required)

Optional



Screw Type: **H**
 #10 X 1-3/4" Stainless Steel Flat Head,
 Robertson Drive, Type A Screws
 (Complete with Nylon Anchor)



Screw Type: **I**
 #10 X 2" Stainless Steel Flat
 Head, Tamper-Resistant Torx
 Drive, Type A Screws
 (Complete with Nylon Anchor)

Operation	Stair Nosing
Features	<ul style="list-style-type: none"> Mill Finish Extruded Aluminum with Aluminum Oxide Grit in Epoxy Base
Application	<ul style="list-style-type: none"> Ideal for Residential, Commercial & Industrial

Customer Name:

Job No./Name:

Date:

Provided By:

Notes: