


CT-21/3A

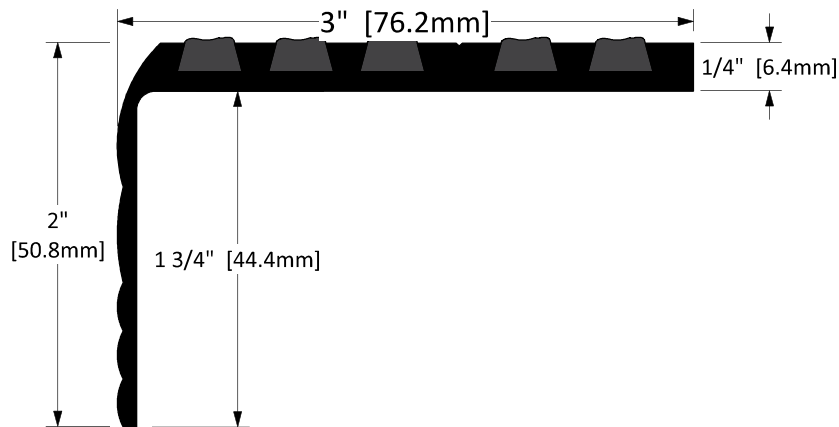

STD

Finish Options

Mill Finish


Standard

Screw Options




Screw Type: **G**
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
Phillips Drive, Concrete Screws
(5/32" Pre-Drill Required)

Optional



Screw Type: **H**
#10 X 1-3/4" Stainless Steel Flat Head,
Robertson Drive, Type A Screws
(Complete with Nylon Anchor)



Screw Type: **I**
#10 X 2" Stainless Steel Flat
Head, Tamper-Resistant Torx
Drive, Type A Screws
(Complete with Nylon Anchor)

Operation	Stair Nosing
Features	<ul style="list-style-type: none"> Mill Finish Extruded Aluminum with Aluminum Oxide Grit in Epoxy Base
Application	<ul style="list-style-type: none"> Ideal for Residential, Commercial & Industrial

Customer Name:

Job No./Name:

Date:

Provided By:

Notes: