



CT-227

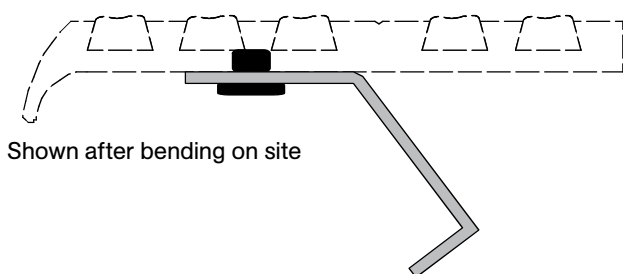

Shown after bending on site

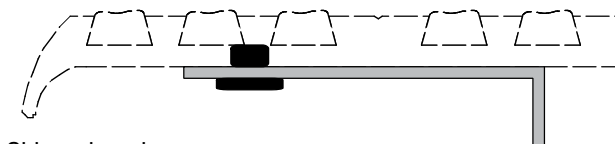

Shipped as shown


Screw Options

Standard




Screw Type: G
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" Pre-Drill Required)

Optional



Screw Type: H
#10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (Complete With Nylon Anchor)



Screw Type: I
#10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (Complete With Nylon Anchor)

Operation	Hidden Strap Anchor for Stair Nosing
Features	For use with abrasive applications only For use in concrete (pour in place installations) No visible screws Typical spacing is 12 in (300mm) center to center
Application	Ideal for Residential, Commercial & Industrial

Customer Name:

Job No./Name:

Date:

Provided By:

Notes: