


CT-43-1

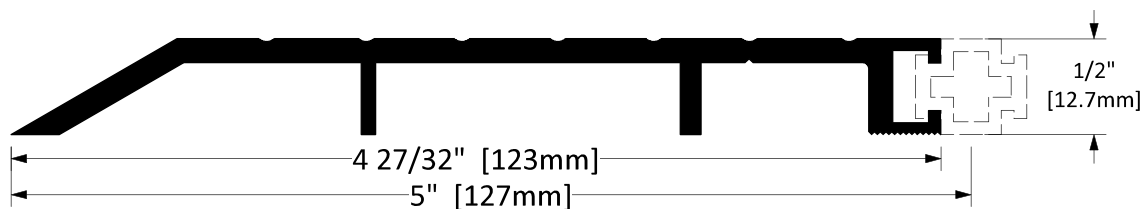

STD

Finish Options

- Mill Finish
- Bronze Anodized
- Black Anodized
- Clear Anodized

OPT

Screw Options

Standard




Screw Type: **G**
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
 Phillips Drive, Concrete Screws
 (5/32" Pre-Drill Required)

Optional



Screw Type: **H**
 #10 X 1-3/4" Stainless Steel Flat Head,
 Robertson Drive, Type A Screws
 (Complete With Nylon Anchor)



Screw Type: **I**
 #10 X 2" Stainless Steel Flat
 Head, Tamper-Resistant Torx
 Drive, Type A Screws
 (Complete With Nylon Anchor)

Operation	Thermal Break Threshold
Features	<ul style="list-style-type: none"> • Mill Finish Extruded Aluminum • Insert not included
Application	<ul style="list-style-type: none"> • Ideal for Residential, Commercial & Industrial

Customer Name: _____ Job No./Name: _____ Date: _____ Provided By: _____

Notes: _____