


# CT-69



# KNC

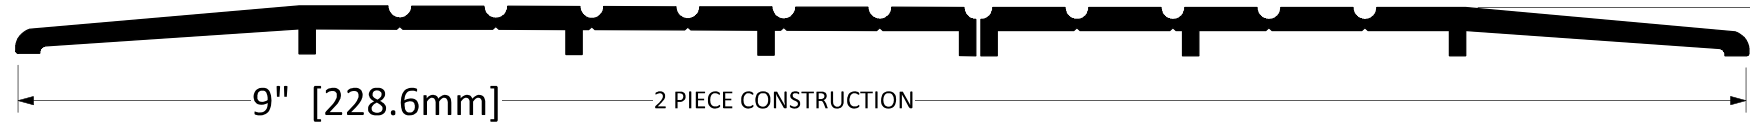

## Finish Options

**STD** Mill Finish

## Screw Options

**Standard**  Screw Type: **G**  
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" Pre-Drill Required)

**Optional**  Screw Type: **H**  
#10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (Complete With Nylon Anchor)

 Screw Type: **I**  
#10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (Complete With Nylon Anchor)

<b>Operation</b>	Threshold
<b>Features</b>	Mill Finish Extruded Aluminum
<b>Application</b>	Ideal for Residential, Commercial & Industrial

**Customer Name:** \_\_\_\_\_ **Job No./Name:** \_\_\_\_\_ **Date:** \_\_\_\_\_ **Provided By:** \_\_\_\_\_

**Notes:**

# KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3  
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com  
© 2020-2022 K.N. Crowder Mfg. Inc. All Rights Reserved.