


W-29

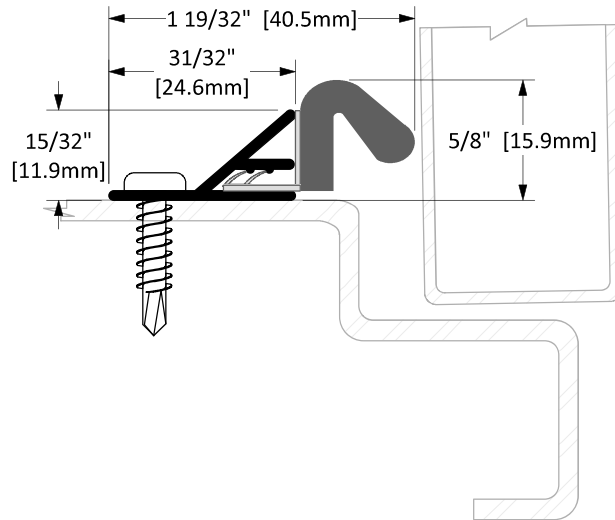

Operation	Weatherstrip
Features	<ul style="list-style-type: none"> Seamless Santoprene Elastomeric Skin Seal Embossed vinyl clad urethane foam Compressed size: 1/4" Compresses less than 1% at +25°C and only 18% at +70°C Water absorption negligible after being submerged in water for 24 hours Solvent resistant Accommodates as much as 5/16" movement of a door away from the seal
Application	<ul style="list-style-type: none"> Ideal for Residential, Commercial & Industrial

Customer Name:

Job No./Name:

Date:

Provided By:

Notes:

STD
OPT

Insert Options

Black
Brown
White


STD
OPT

Extrusion Options

Clear Anodized
Bronze Anodized
Black Anodized
White Finish

Standard

Screw Options



Screw Type: **A**
#8 X 3/4" Stainless Steel Pan Head,
Robertson Drive, Tek Screws

Optional



Screw Type: **B**
#8 X 3/4" Stainless Steel Pan Head,
Tamper-Resistant Torx Drive, Tek Screws