

# CRT-SP[ ] ROUND BAR SINGLE DOOR HANDLE PULL

## INSTRUCTION SHEET




K.N.CROWDER MFG. INC.

- SUITABLE FOR MINIMUM 1-3/8 in [34.9 mm] THICK DOORS
- AVAILABLE IN 18 in [457 mm] AND 36 in [914 mm] LONG DOOR HANDLE PULLS
- LONGER DOOR PULL SCREW AVAILABLE FOR DOORS GREATER THAN 1-3/4 in [44.5 mm] TO 2-1/2 in [63.5 mm] THICK DOORS


CENTER TO CENTER HOLE SPACING FOR DOOR PULLS				
OVERALL PULL LENGTH		NO. OF HOLES	DIMENSION	CTC
18 in [457 mm]		2	14 in [356 mm]	
36 in [914 mm]		2	28 in [711 mm]	

### PRODUCT DIMENSION DETAILS

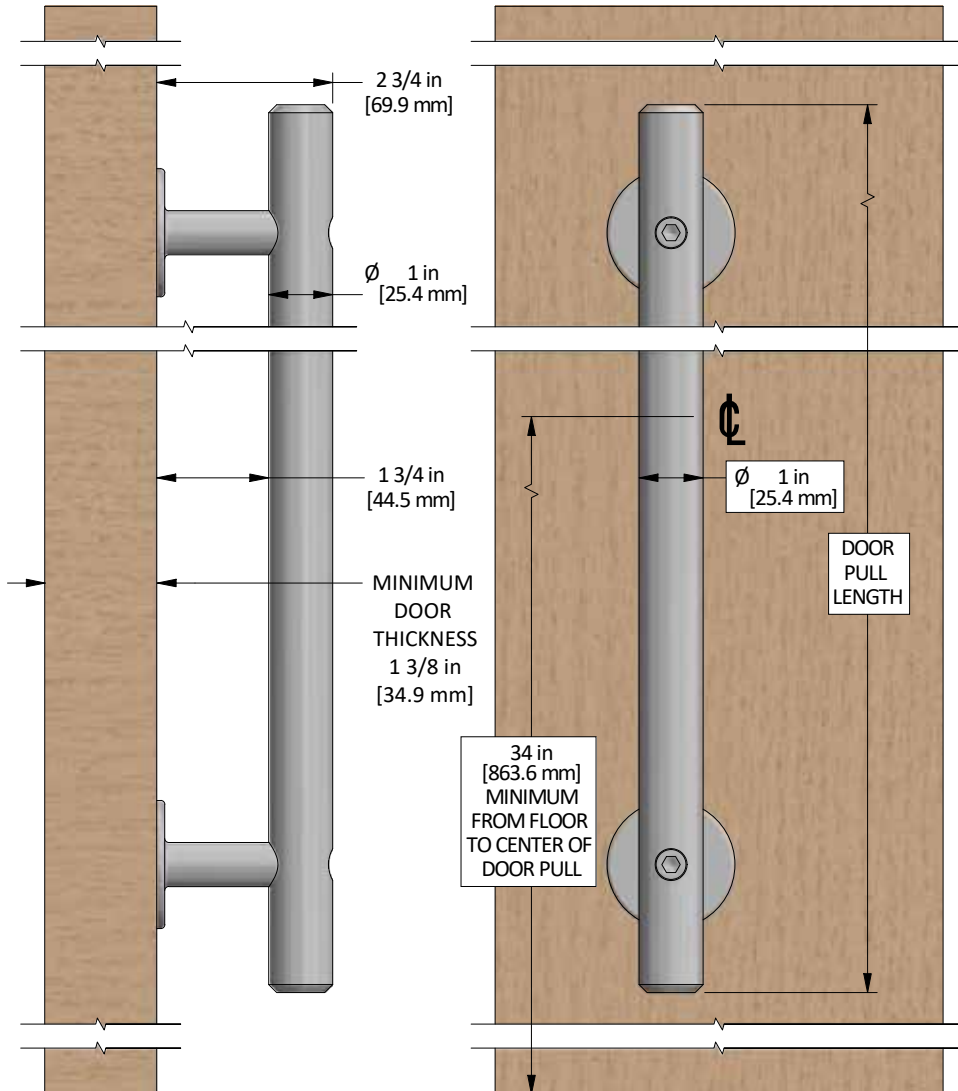

CRT-SP18 (18 in [457 mm]) SHOWN ON LEFT  
 CRT-SP36 (36 in [914 mm]) SHOWN ON RIGHT

### DOOR PREP DETAILS

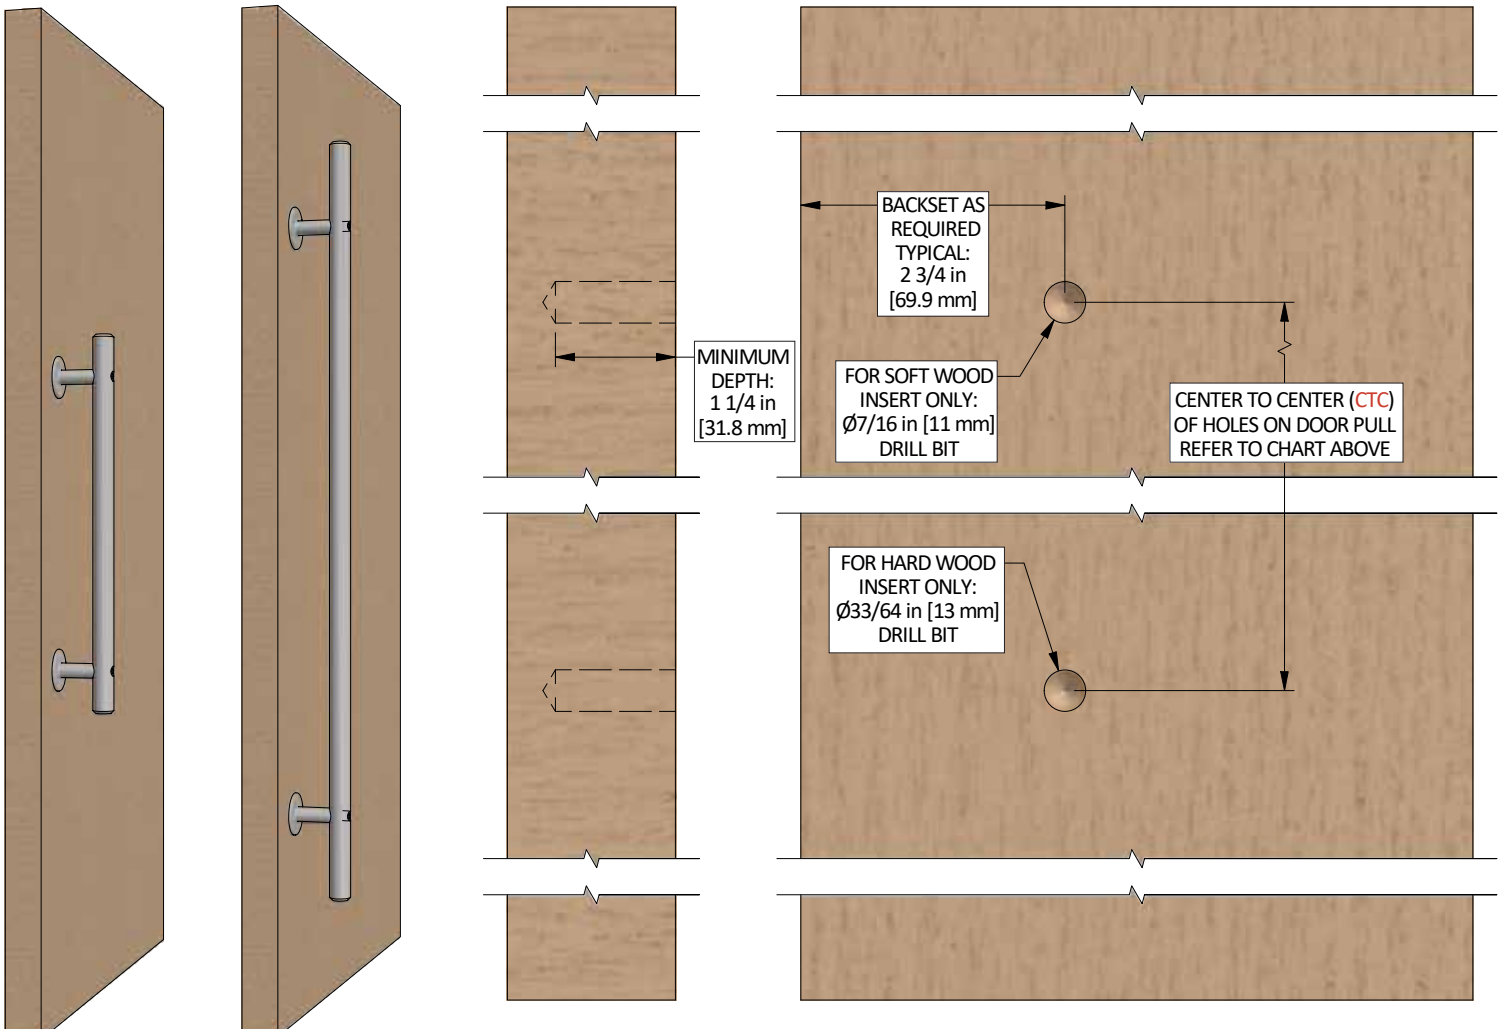


# CRT-SP[ ] ROUND BAR SINGLE DOOR HANDLE PULL

INSTRUCTION SHEET



K.N.CROWDER MFG. INC.

## PARTS LIST

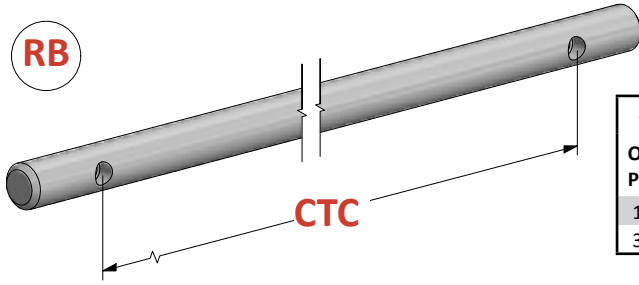

CRT-RBDP-[DOOR PULL LENGTH]  
 ROUND BAR DOOR PULL (1)  
 (DOOR PULL LENGTH, SEE CHART BELOW)

CENTER TO CENTER HOLE SPACING FOR DOOR PULLS				
OVERALL PULL LENGTH		NO. OF HOLES	DIMENSION	CTC
18 in	[457 mm]	2	14 in	[356 mm]
36 in	[914 mm]	2	28 in	[711 mm]

**SWI**  
 5/16-18 SOFT WOOD  
 FLANGE ANCHOR (2)

**or HWI**  
 5/16-18 HARD WOOD  
 KNIFE ANCHOR (2)

**C**  
 CRT-DPB-C (2)  
 (DOOR PULL BRACKET TYPE "C",  
 CLEARANCE HOLE THROUGH)

**SC**  
 5/16-18 X 3-1/2" SOCKET  
 HEAD CAP SCREW (2)

## ASSEMBLY

