




CT-52S-SS



Intertek

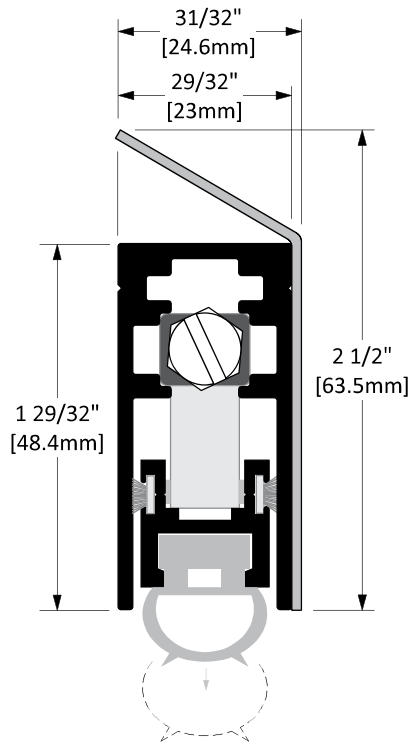

Finish Options

STD

18 GA. 304 Stainless Steel 2B


Screw Options

STANDARD



SCREW TYPE: **J**
 #10 X 1-1/2" STAINLESS STEEL
 TRUSS HEAD, ROBERTSON DRIVE,
 TYPE A SCREWS

OPTIONAL



SCREW TYPE: **K**
 #10 X 1-1/2" STAINLESS STEEL
 BUTTON HEAD, TAMPER-
 RESISTANT TORX DRIVE, TYPE A
 SCREWS

Operation	Automatic Door Bottom
Features	<ul style="list-style-type: none"> • 18 GA. 304 SS. 2B Stainless Steel Cover • Clear Anodized Extruded Aluminum with Silicone • Maximum effective drop: 11/16" [17.5mm]
Application	<ul style="list-style-type: none"> • Ideal for Residential, Commercial & Industrial

Part No.:

Part Description:

Customer Name:

Job No./Name:

Date:

Provided By:

Notes: