




CT-22/3



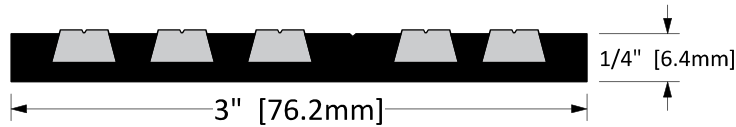


Finish Options

STD Mill Finish

Operation	Stair Nosing
Features	<ul style="list-style-type: none"> • Mill Finish Extruded Aluminum with Lanel Insert (P.V.C.)
Application	<ul style="list-style-type: none"> • Ideal for Residential, Commercial & Industrial

Screw Options

STANDARD	 <p>SCREW TYPE: G 3/16" x 1-3/4" HI-LO TAPPING THREAD, GREY PHILLIPS DRIVE, CONCRETE SCREWS (5/32" PRE-DRILL REQUIRED)</p>
	 <p>SCREW TYPE: H #10 X 1-3/4" STAINLESS STEEL FLAT HEAD, ROBERTSON DRIVE, TYPE A SCREWS (COMPLETE WITH NYLON ANCHOR)</p>
OPTIONAL	 <p>SCREW TYPE: I #10 X 2" STAINLESS STEEL FLAT HEAD, TAMPER-RESISTANT TORX DRIVE, TYPE A SCREWS (COMPLETE WITH NYLON ANCHOR)</p>

Part No.: _____ **Part Description:** _____

Customer Name: _____ **Job No./Name:** _____ **Date:** _____ **Provided By:** _____

Notes: _____