
C-15B-C **Concealed Mount Flush Pull** Installation Instructions

Suitable for minimum 1 3/8 in [34.9 mm] doors 2 1/4 in [57.2 mm] x 15 in [381.0 mm] flush pull




Door Prep Details



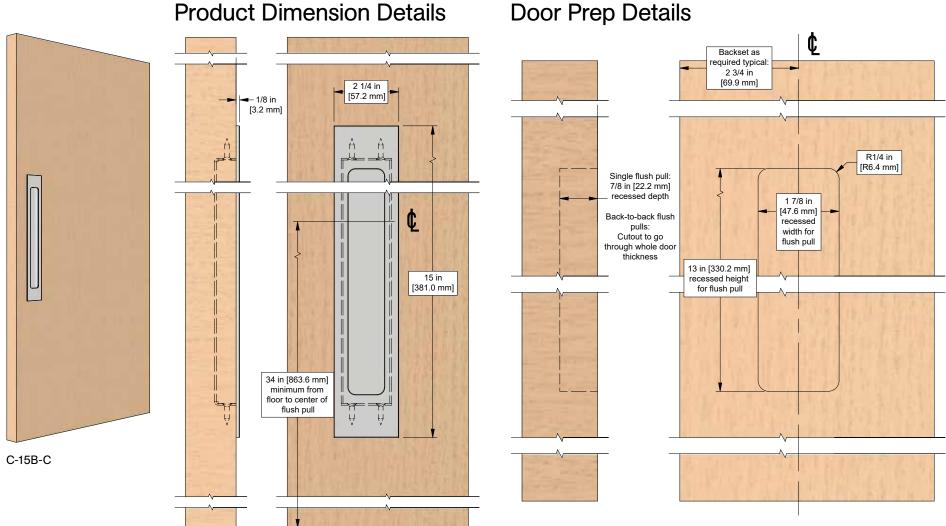

Parts List




C-B15-C (1) 2 1/4 in [57.2 mm] x 15 in [381.0 mm] flush pull



#8 x 3/4" Flat Head Screw (2)

Assembly

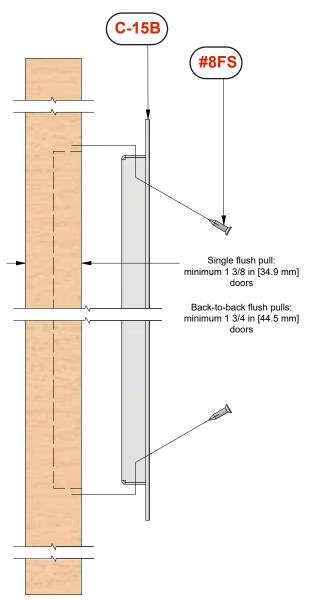

KN Crowder ¹²²⁰ Burloak Drive, Burlington, Ontario, Canada, L7L 6B3 T. 1–866–999–1562 customerservice@kncrowder.com © 2020-2023 K.N. Crowder Mfg. Inc. All Rights Reserved.