C-21-BB Passage Set

563 in [141.3 mm]

ഹ

3.88 in [98.6 mm]


3.43 in [87.1 mm]


Installation Instructions

Specifications


Door Thickness: 1 3/8 in [34.9 mm] to 2 1/4 in [57.2 mm]

Not to scale

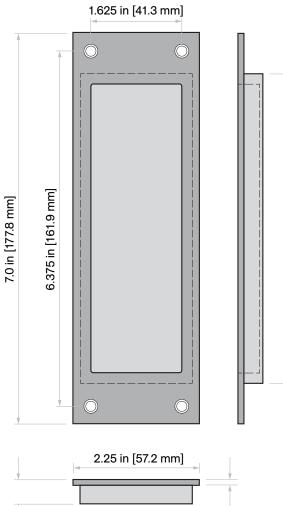





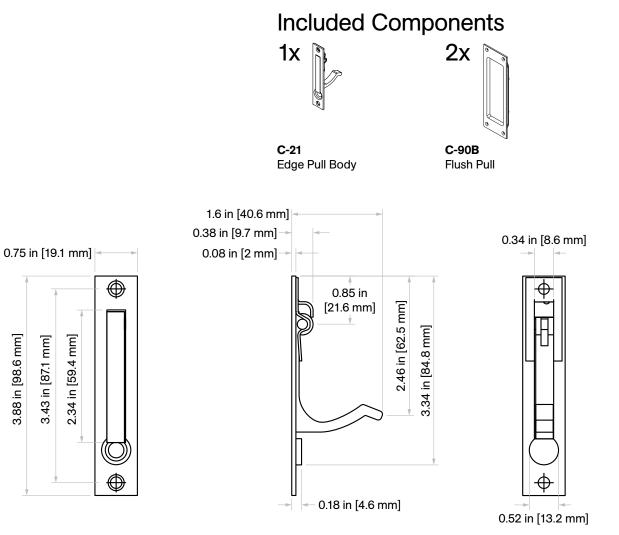

Door Prep Template


Horizontal and vertical spacing of the flush pulls is up to the end user. However, we do suggest to line up the backset with the other locks on your project.

C-90B

For example: 2 in [50.8 mm], 2.5 in [63.5 mm], 2.75 in [69.8 mm], 5 in [127 mm], and 6 in [152.4 mm].

Responsibility

Door and frame manufacturers are responsible for providing adequate construction or reinforcement for proper installation of hardware shown.

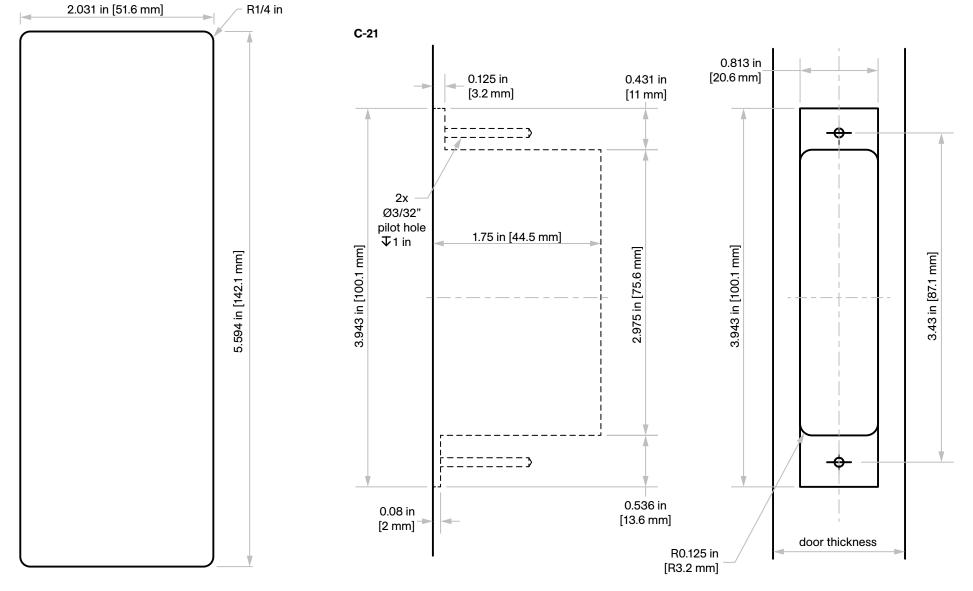

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3 T. 1–866–999–1562 customerservice@kncrowder.com kncrowder.com © 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.