C-62L-RET Lockset c/w C-60RE & C-60RT Round Flush Pulls


Installation Instructions



Not to scale


Suitable for 1 3/8 in [34.9 mm]* or 1 3/4 in [44.4 mm] thick doors

For other door thicknesses, please contact Customer Service. *To use the C-60RE & C60RT flush pulls on a 1 3/8 in [34.9 mm] thick door, the thru-bolted post on each flush pull are supplied with a notch that allows for shortening its length for 1 3/8 in [34.9 mm] thick doors. Twist off or cut with hack saw.

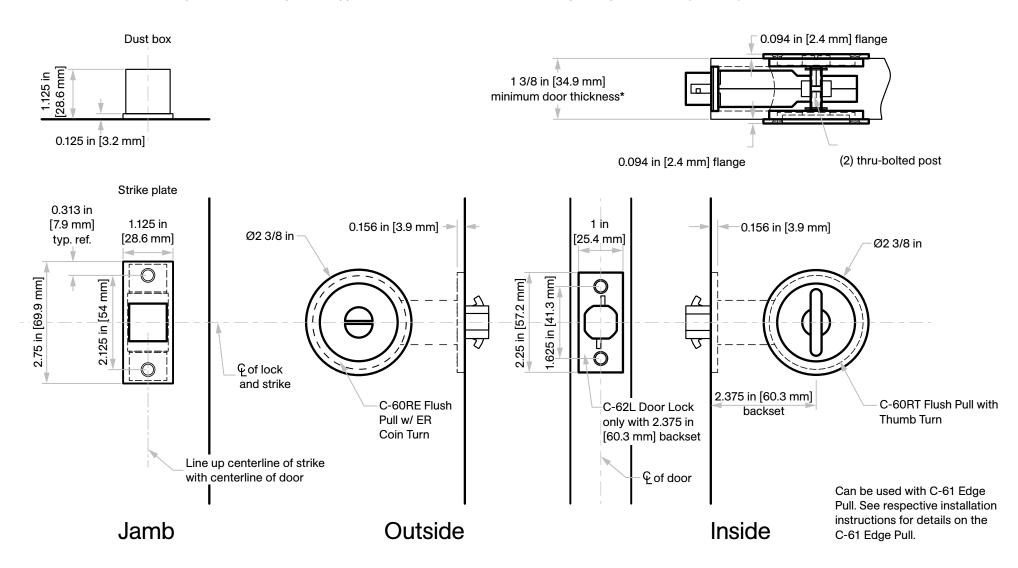

Door Prep Template

Not to scale

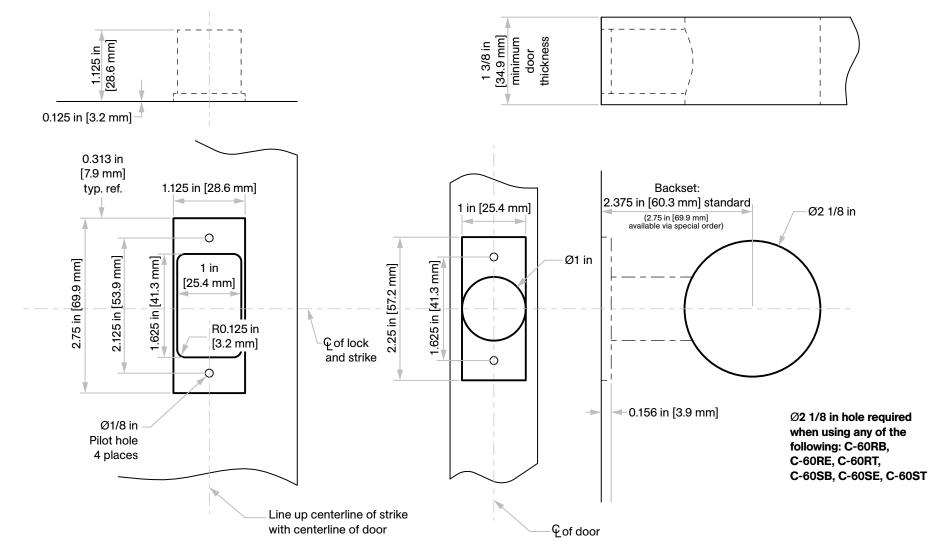

Responsibility:

Door and frame manufacturers are responsible for providing adequate construction or reinforcement for proper installation of hardware shown.

Installation:

Install C-62L Lock & Strike plate, and C-60RE & C-60RT using the (12) #8 screws provided.

