

C-80L-CT Security Lockset

Installation Instructions



Specifications

Case: Heavy gauge wrought

Armor Front: Brass, bronze, stainless

Dead Bolt: 1/2 in [12.7 mm] thick x 5/8 in [15.9 mm] high x 1 in [25.4 mm] throw

Pull: 1/4 in [6.4 mm] thick x 1 1/2 in [38.1 mm] high x 7/8 in [22.2 mm] swingout

Thumb Turn Hub: 3/16 in [4.8 mm] on the diamond

Cam: See details on right

Door Thickness: 1 3/8 in [34.9 mm] to 1 3/4 in [44.5 mm]

Cam Required: B520-233


Dimensions

W = 1.000 in [25.4 mm]

X = 0.232 in [5.9 mm]


Y = 0.729 in [18.5 mm]

Z = 0.694 in [17.6 mm]




Not to scale


Included Components



C-80L
Lock and Edge Pull Body



C-80C
Cylinder Flush Pull





C-80T
Thumb Turn Flush Pull



Cylinder

1-5/32 in Diameter hole x 1 in Depth.
5-PIN Schlage "C"
Key Way (will **not** sit flush with door)

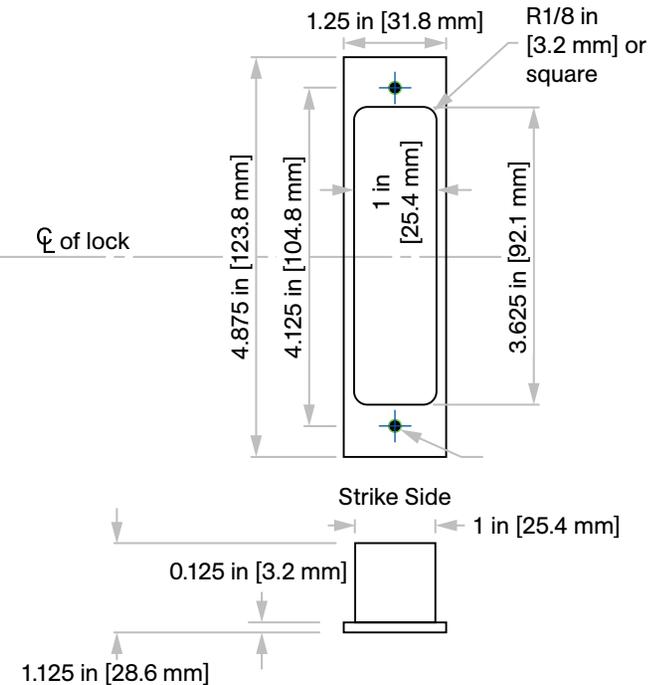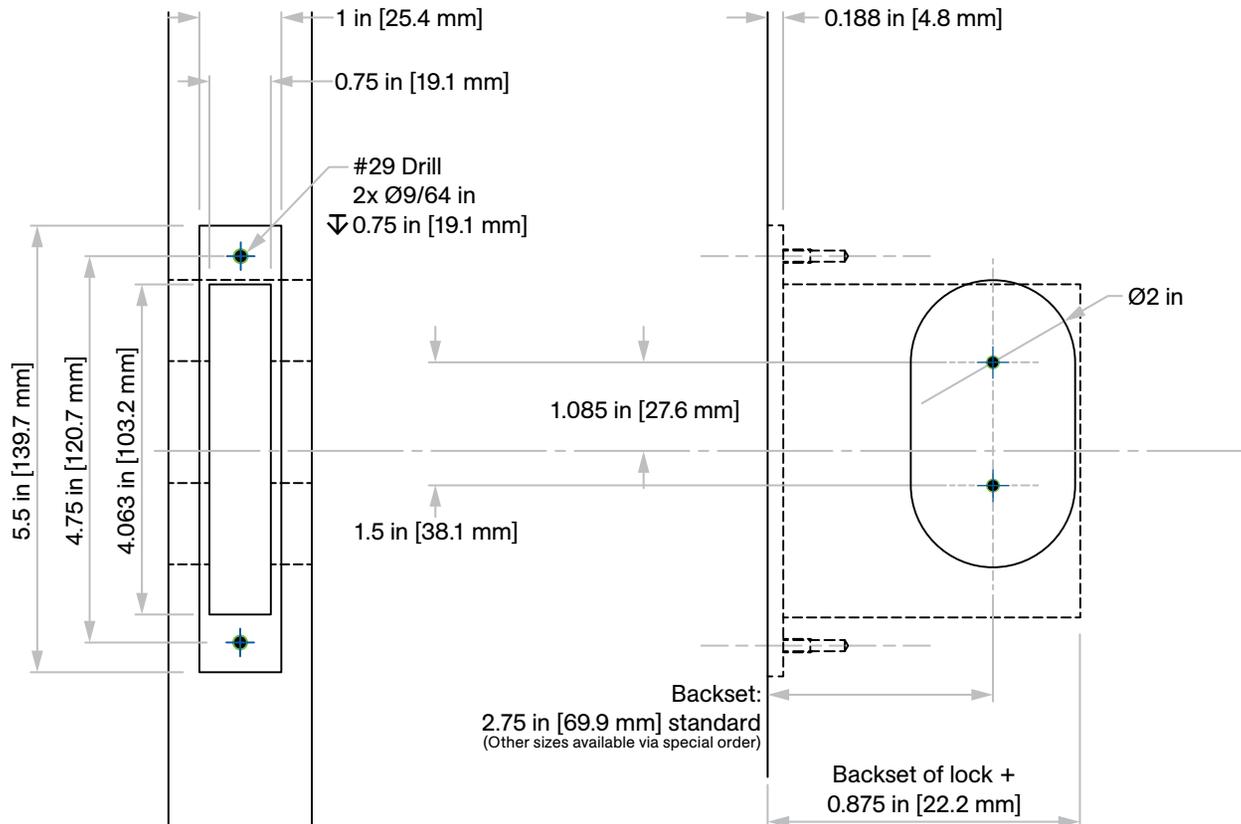

Note: Cylinder will **not** sit flush on 1 3/8 in [34.9 mm] doors