

C-80L-ET Privacy Lockset

Installation Instructions

Specifications

Case: Heavy gauge wrought

Armor Front: Brass, bronze, stainless

Dead Bolt: 1/2 in [12.7 mm] thick x 5/8 in [15.8 mm] high x 1 in [25.4 mm] throw


Pull: 1/4 in [6.4 mm] thick x 1 1/2 in [38.1 mm] high x 7/8 in [22.2 mm] swingout

Thumb Turn Hub: 3/16 in [4.8 mm] on the diamond


Door Thickness: 1 3/8 in [34.9 mm] to 1 3/4 in [44.5 mm]

KNC
Door Locks & Pulls


Included Components



C-80L
Lock and Edge
Pull Body





C-80E
Emergency
Release Coin
Turn Flush Pull



C-80T
Thumb Turn
Flush Pull

Note: Cut Spindle on flush pulls down for 1 3/8 in [34.9 mm] doors.

Not to scale

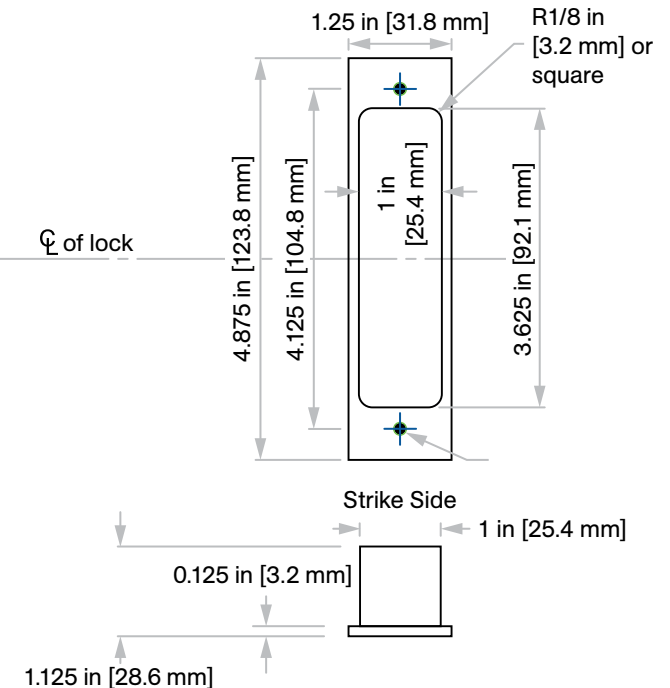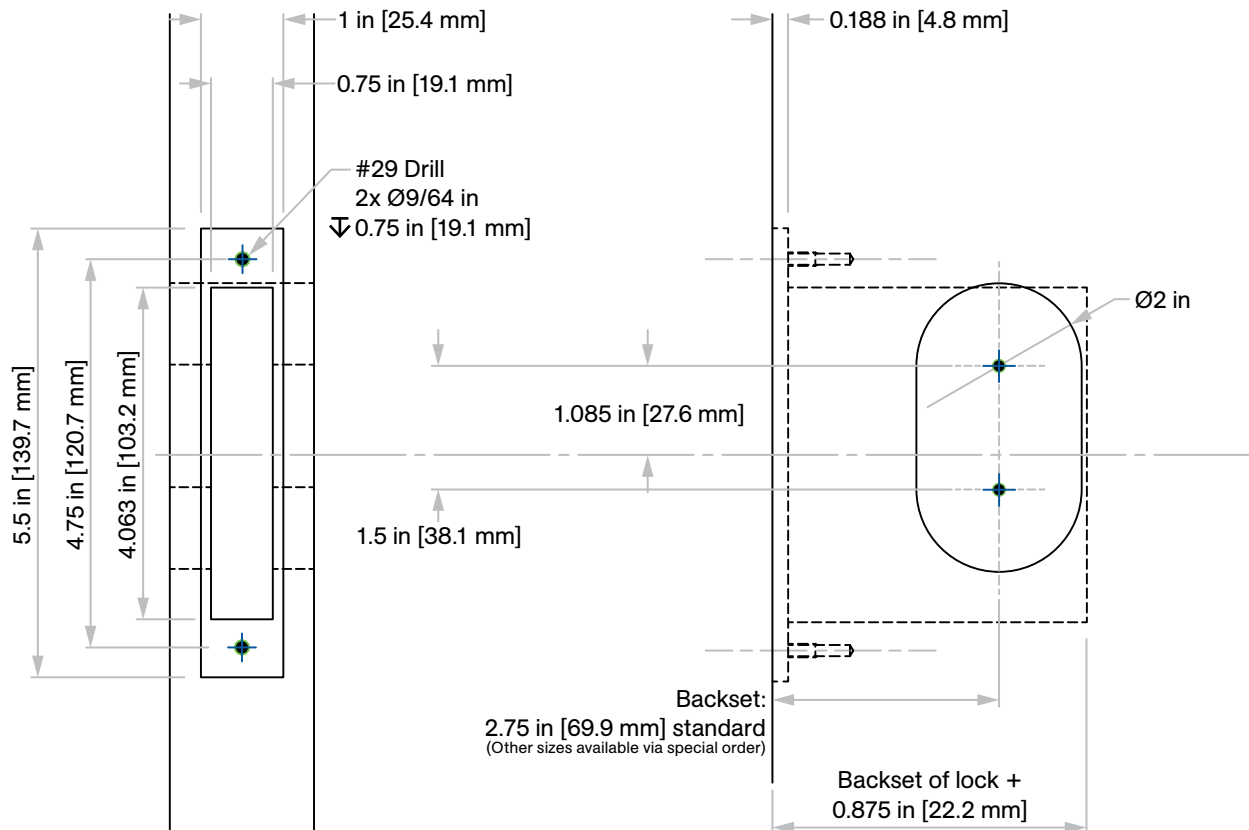

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com
© 2020-2026 K.N. Crowder Mfg. Inc. All Rights Reserved.