

C-90BP-CT Security Bi-parting Lockset

Installation Instructions



Specifications

Case: Heavy gauge wrought

Armor Front: Brass, bronze, stainless

Dead Bolt: 1/2 in [12.7 mm] thick x 1 7/32 in [31 mm] high x 1 in [25.4 mm] throw

Pull: 1/2 in [12.7 mm] thick x 2 in [50.8 mm] high x 1 1/4 in [31.8 mm] throw

Thumb Turn Hub: 3/16 in [4.8 mm] on the diamond

Cam: See details on right

Door Thickness: 1 3/8 in [34.9 mm] to 2 1/4 in [57.2 mm]

Cam Required: B520-233


Dimensions

W = 1.000 in [25.4 mm]


X = 0.232 in [5.9 mm]

Y = 0.729 in [18.5 mm]

Z = 0.694 in [17.6 mm]




Included Components



C-90L
Lock and Edge
Pull Body




C-90C
Cylinder
Flush Pull




C-90T
Thumb Slide
Flush Pull



Cylinder
1-5/32 in
Diameter hole
x 1 in Depth.
5-PIN Schlage
"C" Key Way
(will **not** sit flush
with door)




C-90S
Strike and Edge
Pull Body



C-90B
Blank Flush
Pulls

Not to scale

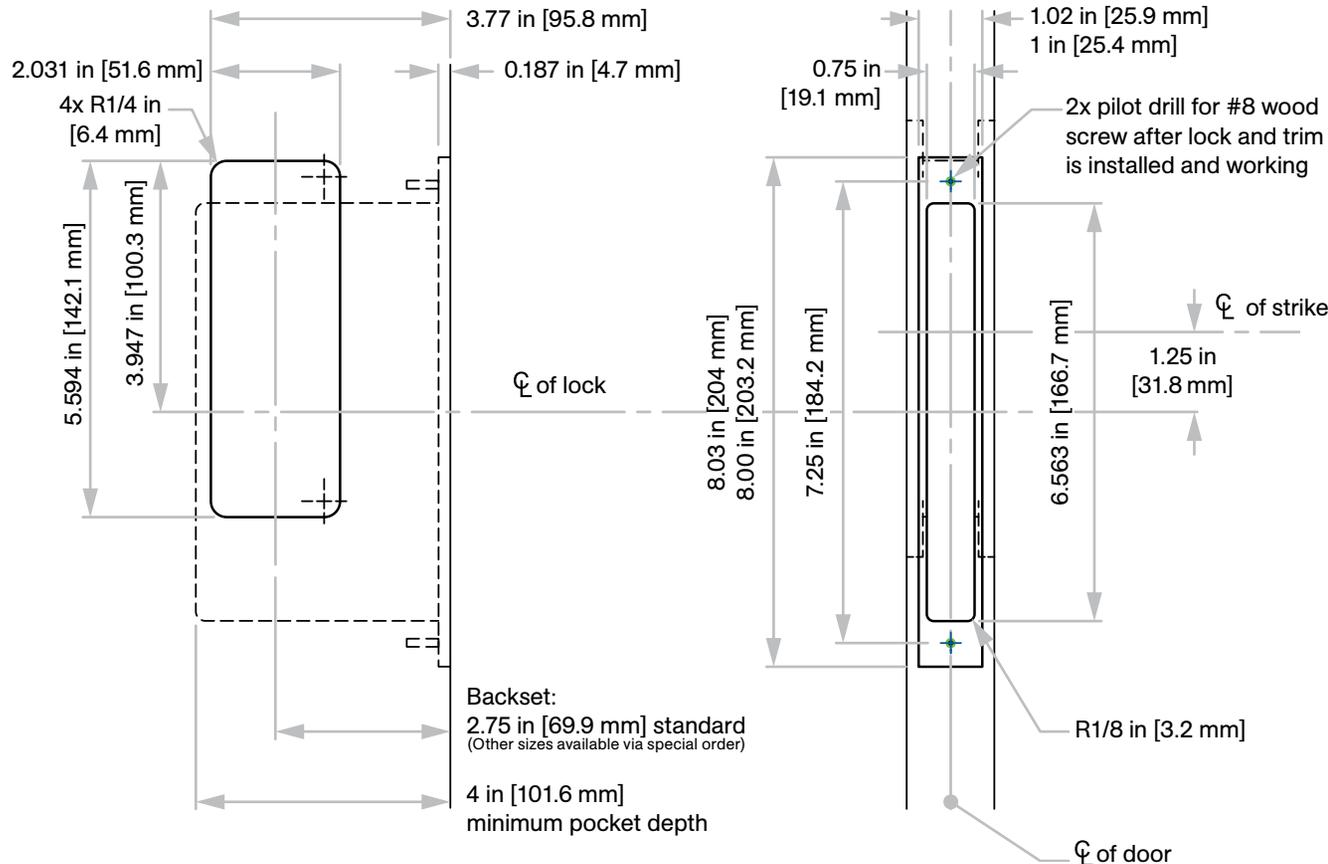

Door prep is the same for both doors.

Note: Cylinder will not sit flush on 1 3/8 in [34.9 mm] doors

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com
© 2020-2026 K.N. Crowder Mfg. Inc. All Rights Reserved.