# C-90L-CC Security Lockset

Installation Instructions



# **Specifications**

Case: Heavy gauge wrought

Armor Front: Brass, bronze, stainless

Dead Bolt: 1/2 in [12.7 mm] thick x 1 7/32 in [31 mm] high x

1 in [25.4 mm] throw

**Pull:** 1/2 in [12.7 mm] thick x 2 in [50.8 mm] high x 1 1/4 in

[31.8 mm] throw

Thumb Turn Hub: 3/16 in [4.8 mm] on the diamond


Cam: See details on right

Door Thickness: 1 3/4 in [44.5 mm] to 2 1/4 in [57.2 mm]

# Cam Required: B520-233

#### **Dimensions**


W = 1.000 in [25.4 mm] X = 0.232 in [5.9 mm] Y = 0.729 in [18.5 mm] Z = 0.694 in [17.6 mm]



### Not to scale

## **Included Components**

Flush Pull




**Pull Body** 





#### Cylinder

1 in Diameter hole x 1 in Depth. 5-PIN Schlage "C" Key Way (will **not** sit flush with door)

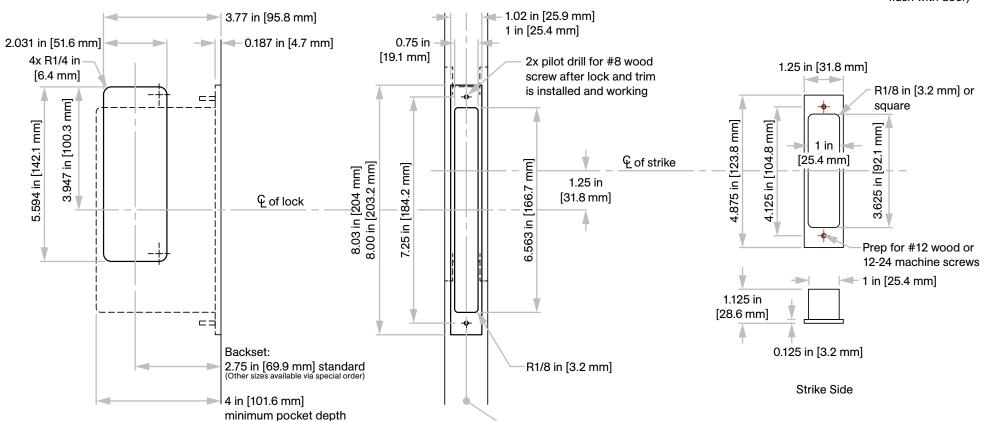



1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1–866–999–1562 customerservice@kncrowder.com
© 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.

kncrowder.com

♀ of door

**Note:** When using two 1 in [25.4 mm] depth cylinders, they will not sit flush with flush pulls on a 1 3/4 in [44.5 mm] door. Therefore, cylinders will protrude past face of door.