

# C-90L-CC Security Lockset

Installation Instructions



## Specifications

**Case:** Heavy gauge wrought

**Armor Front:** Brass, bronze, stainless

**Dead Bolt:** 1/2 in [12.7 mm] thick x 1 7/32 in [31 mm] high x 1 in [25.4 mm] throw

**Pull:** 1/2 in [12.7 mm] thick x 2 in [50.8 mm] high x 1 1/4 in [31.8 mm] throw

**Thumb Turn Hub:** 3/16 in [4.8 mm] on the diamond

**Cam:** See details on right

**Door Thickness:** 1 3/4 in [44.5 mm] to 2 1/4 in [57.2 mm]

## Cam Required: B520-233


### Dimensions

W = 1.000 in [25.4 mm]

X = 0.232 in [5.9 mm]




Y = 0.729 in [18.5 mm]

Z = 0.694 in [17.6 mm]



**Not to scale**

## Included Components

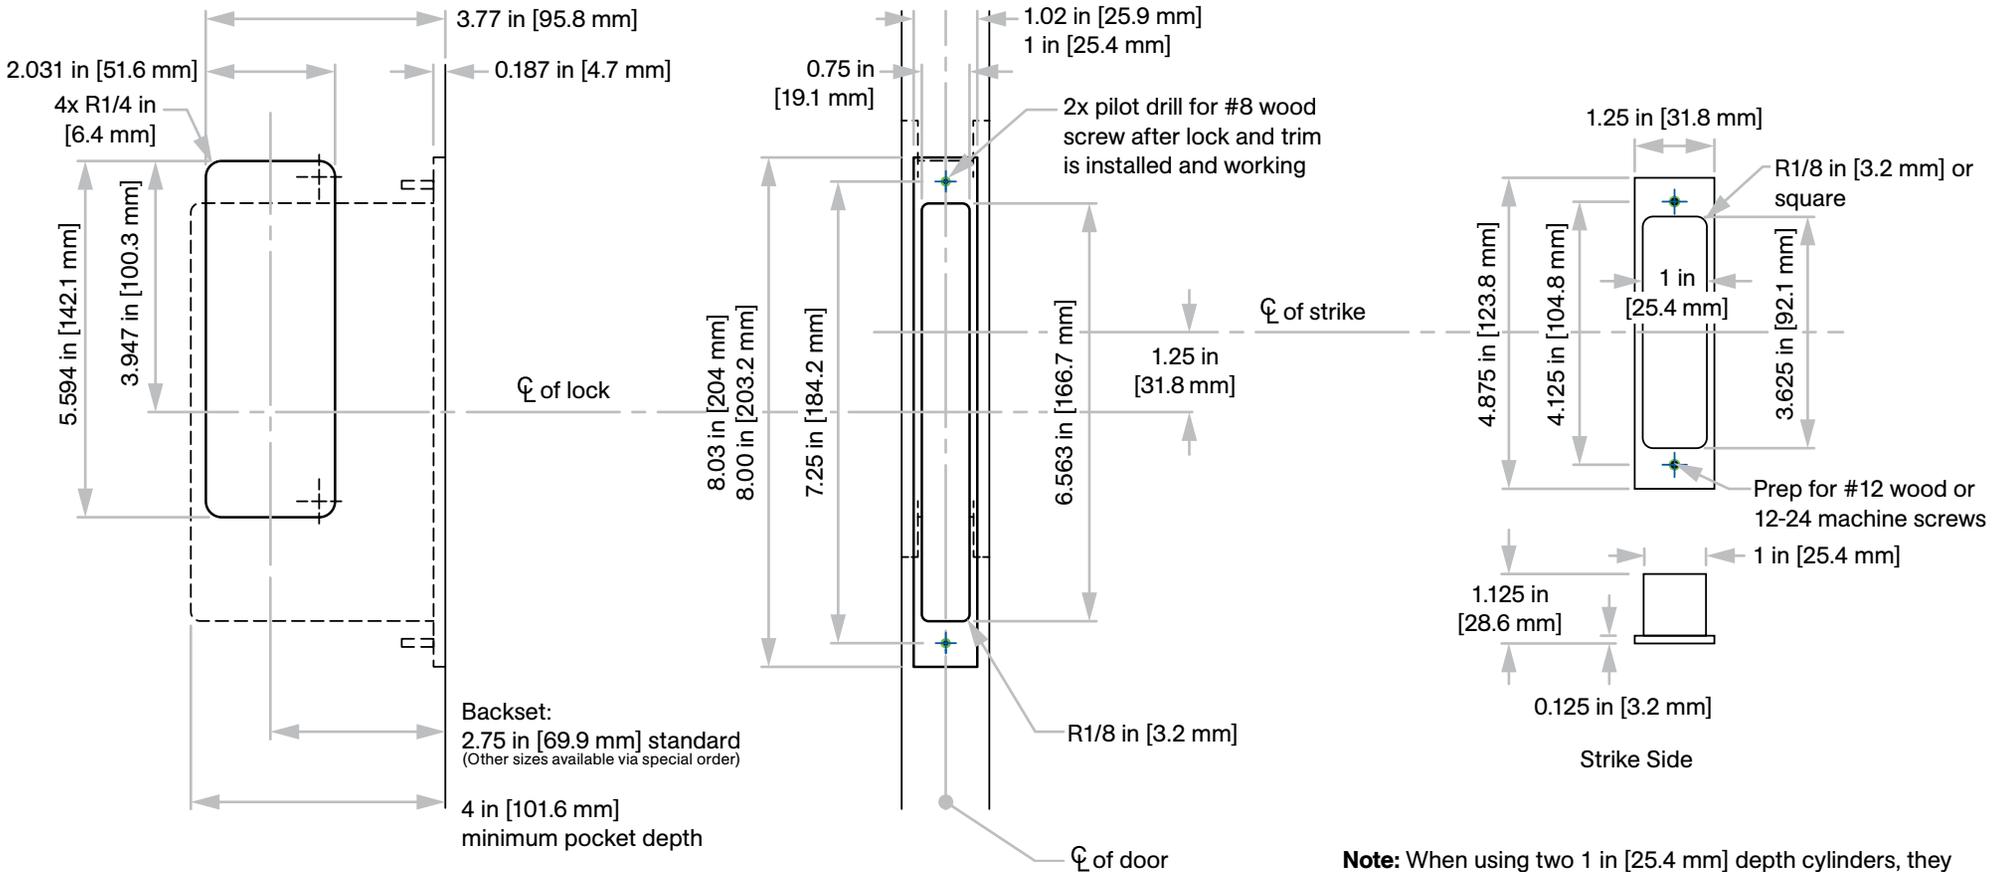

**Note:** When using two 1 in [25.4 mm] depth cylinders, they will not sit flush with flush pulls on a 1 3/4 in [44.5 mm] door. Therefore, cylinders will protrude past face of door.