C-90L-CT Security Lockset

Installation Instructions

KNC
Door Locks & Pulls

Specifications

Case: Heavy gauge wrought
Armor Front: Brass, bronze, stainless
Dead Bolt: 1/2 in [12.7 mm] thick x 1 7/32 in [31 mm] high x 1 in [25.4 mm] throw
Pull: 1/2 in [12.7 mm] thick x 2 in [50.8 mm] high x 1 1/4 in [31.8 mm] throw
Thumb Turn Hub: 3/16 in [4.8 mm] on the diamond
Cam: See details on right
Door Thickness: 1 3/8 in [34.9 mm] to 2 1/4 in [57.2 mm]

Cam Required: B520-233

Dimensions
W = 1.000 in [25.4 mm]
X = 0.232 in [5.9 mm]
Y = 0.729 in [18.5 mm]
Z = 0.694 in [17.6 mm]

Not to scale



Included Components



C-90L
Lock and Edge Pull Body



C-90C
Cylinder Flush Pull



C-90T
Thumb Slide Flush Pull

Cylinder
1-5/32 in Diameter hole x 1 in Depth. 5-PIN Schlage "C" Key Way (will **not** sit flush with door)

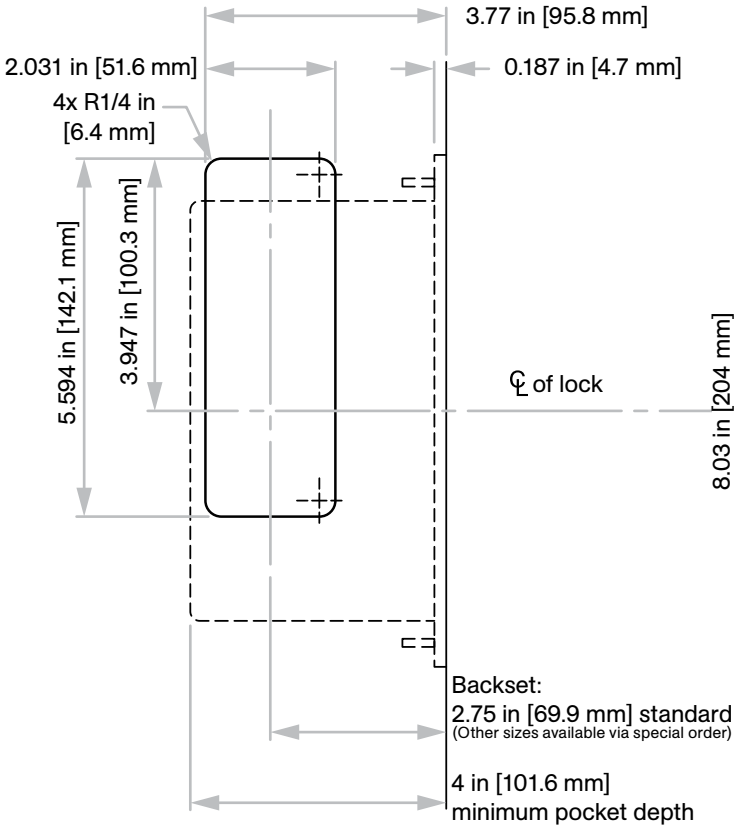

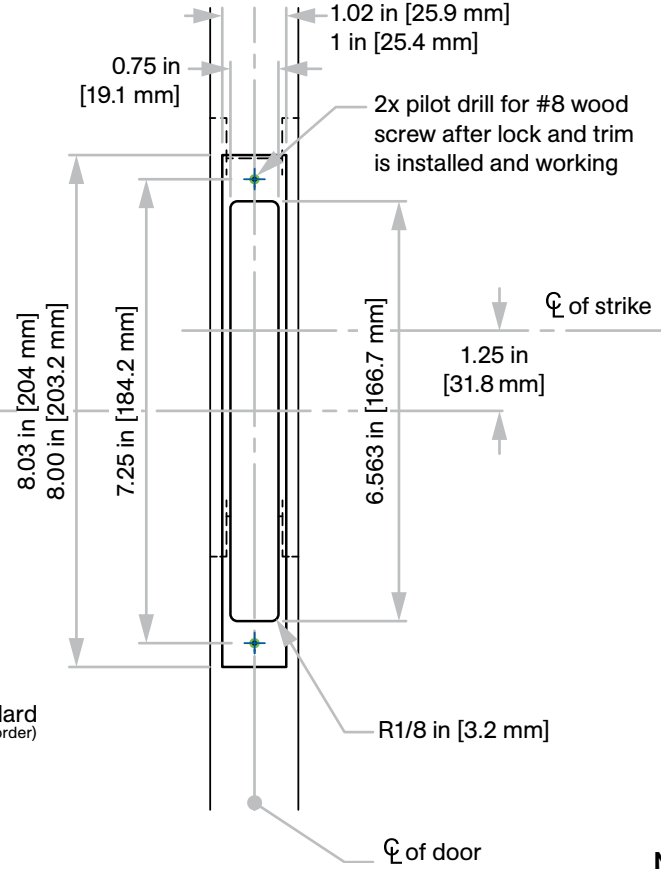

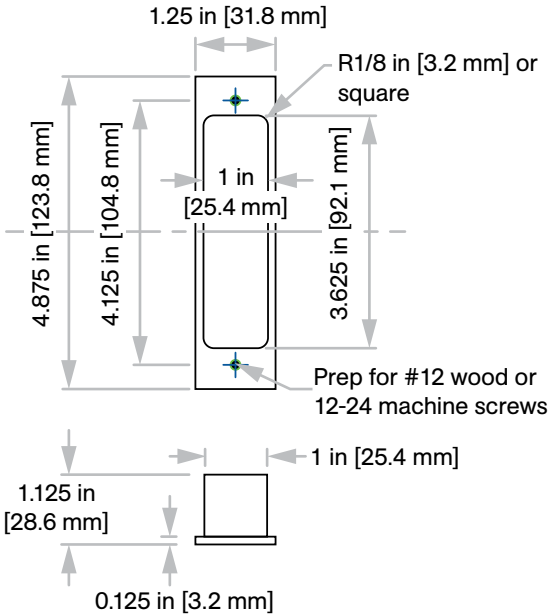

Note: Cylinder will not sit flush on 1 3/8 in [34.9 mm] doors

KN Crowder
1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1–866–999–1562 customerservice@kncrowder.com kncrowder.com

© 2020-2026 K.N. Crowder Mfg. Inc. All Rights Reserved.