

# C-90L-OT Privacy Lockset

Installation Instructions

**KNC**  
Door Locks & Pulls

## Specifications

**Case:** Heavy gauge wrought

**Armor Front:** Brass, bronze, stainless



**Dead Bolt:** 1/2 in [12.7 mm] thick x 1 7/32 in [31 mm] high x 1 in [25.4 mm] throw

**Pull:** 1/2 in [12.7 mm] thick x 2 in [50.8 mm] high x 1 1/4 in [31.8 mm] throw


**Thumb Turn Hub:** 3/16 in [4.8 mm] on the diamond

**Door Thickness:** 1 3/8 in [34.9 mm] to 2 1/4 in [57.2 mm]

## Included Components



Not to scale

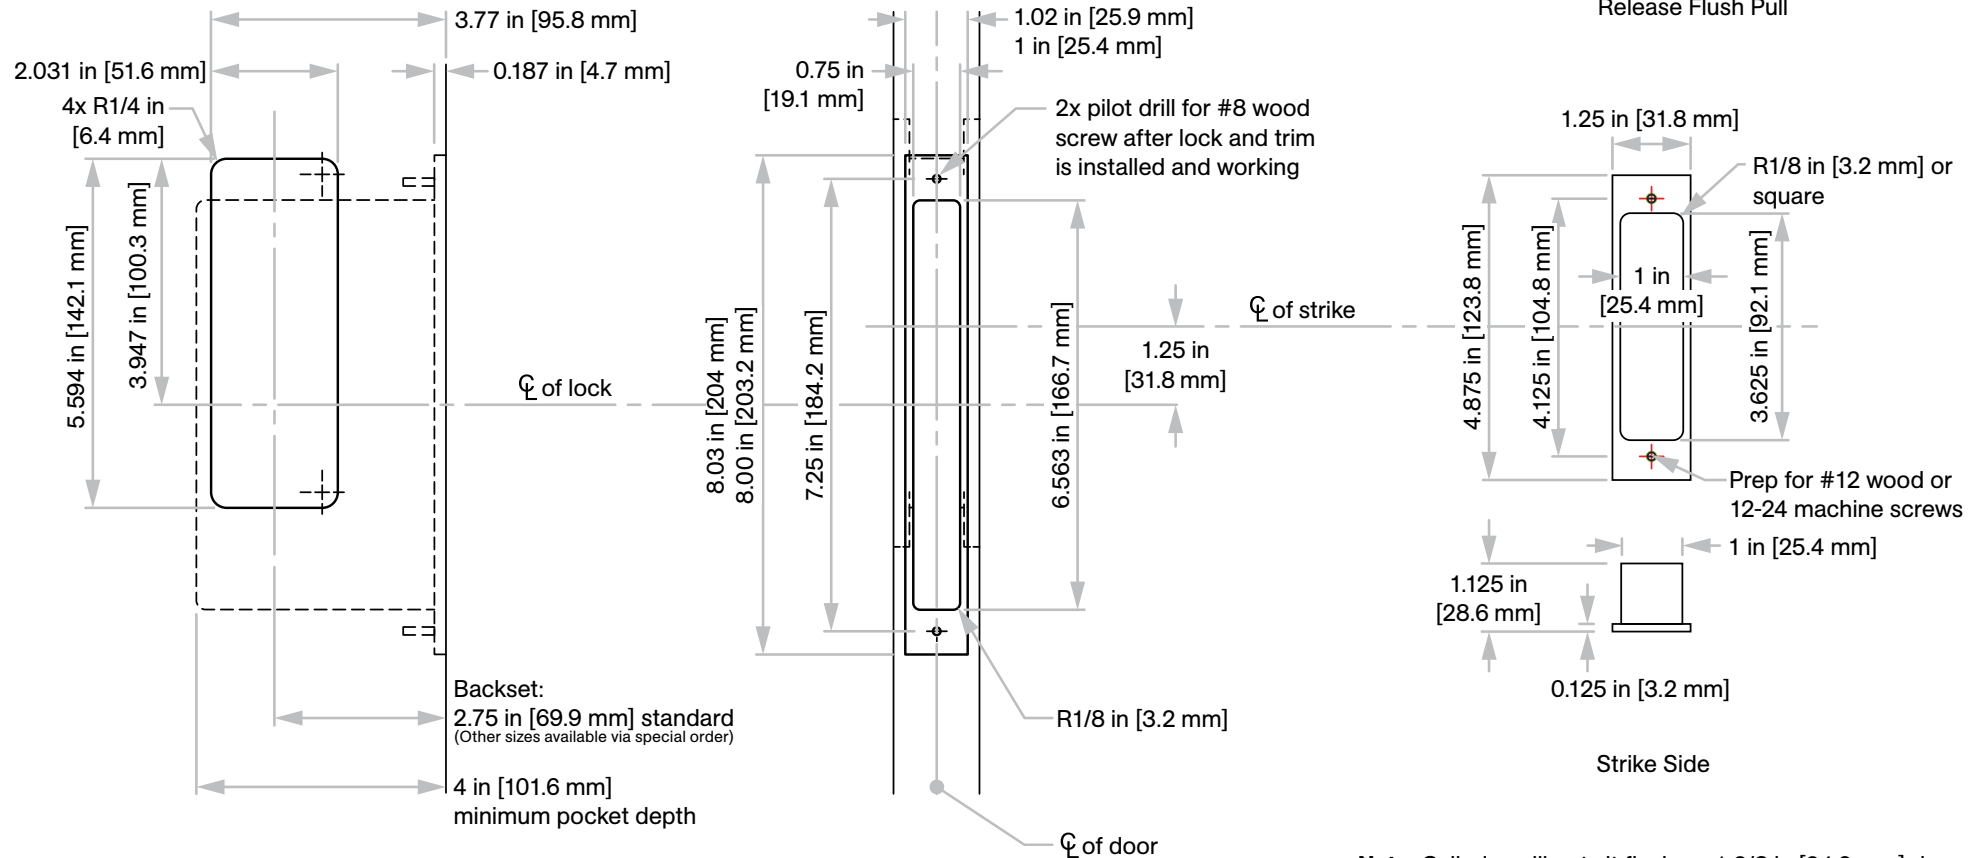

**Note:** Cylinder will not sit flush on 1 3/8 in [34.9 mm] doors

**KN Crowder**

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3  
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com  
© 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.