C-90L-OT Privacy Lockset

Installation Instructions

KNC
Door Locks & Pulls

Specifications

Case: Heavy gauge wrought
Armor Front: Brass, bronze, stainless
Dead Bolt: 1/2 in [12.7 mm] thick x 1 7/32 in [31 mm] high x 1 in [25.4 mm] throw
Pull: 1/2 in [12.7 mm] thick x 2 in [50.8 mm] high x 1 1/4 in [31.8 mm] throw
Thumb Turn Hub: 3/16 in [4.8 mm] on the diamond
Door Thickness: 1 3/4 in [44.5 mm] to 2 1/4 in [57.2 mm]

Included Components



C-90L
Lock and Edge Pull Body



C-90OI
Occupancy Indicator with Coin Turn Emergency Release Flush Pull



C-90T
Thumb Slide Flush Pull

Not to scale

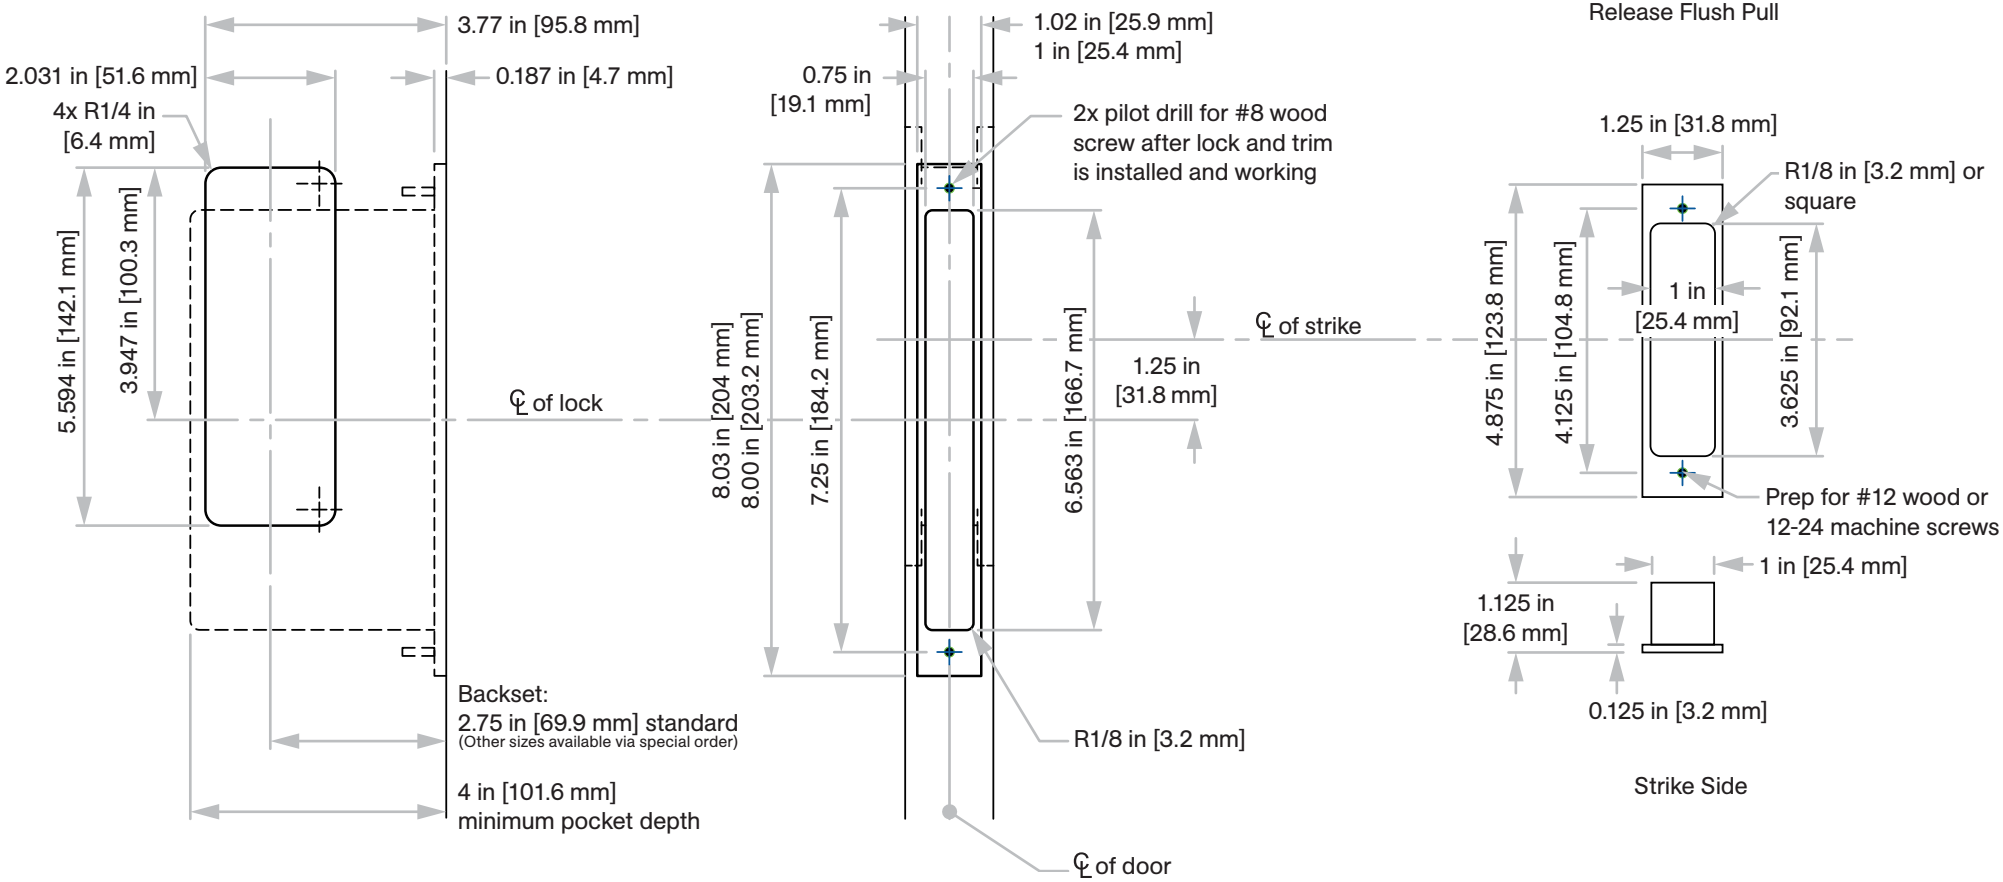

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1—866—999—1562 customerservice@kncrowder.com kncrowder.com
© 2020-2026 K.N. Crowder Mfg. Inc. All Rights Reserved.