C-91-BB Passage Set

Installation Instructions

KNC
Door Locks & Pulls

Specifications

Case: Heavy gauge wrought
Armor Front: Brass, bronze, stainless
Pull: 1/2 in [12.7 mm] thick x 2 in [50.8 mm] high x 1 1/4 in [31.8 mm] throw
Door Thickness: 1 3/8 in [34.9 mm] minimum

Included Components

1x



C-91
Edge Pull Body

2x



C-90B
Blank Flush Pull

Not to scale

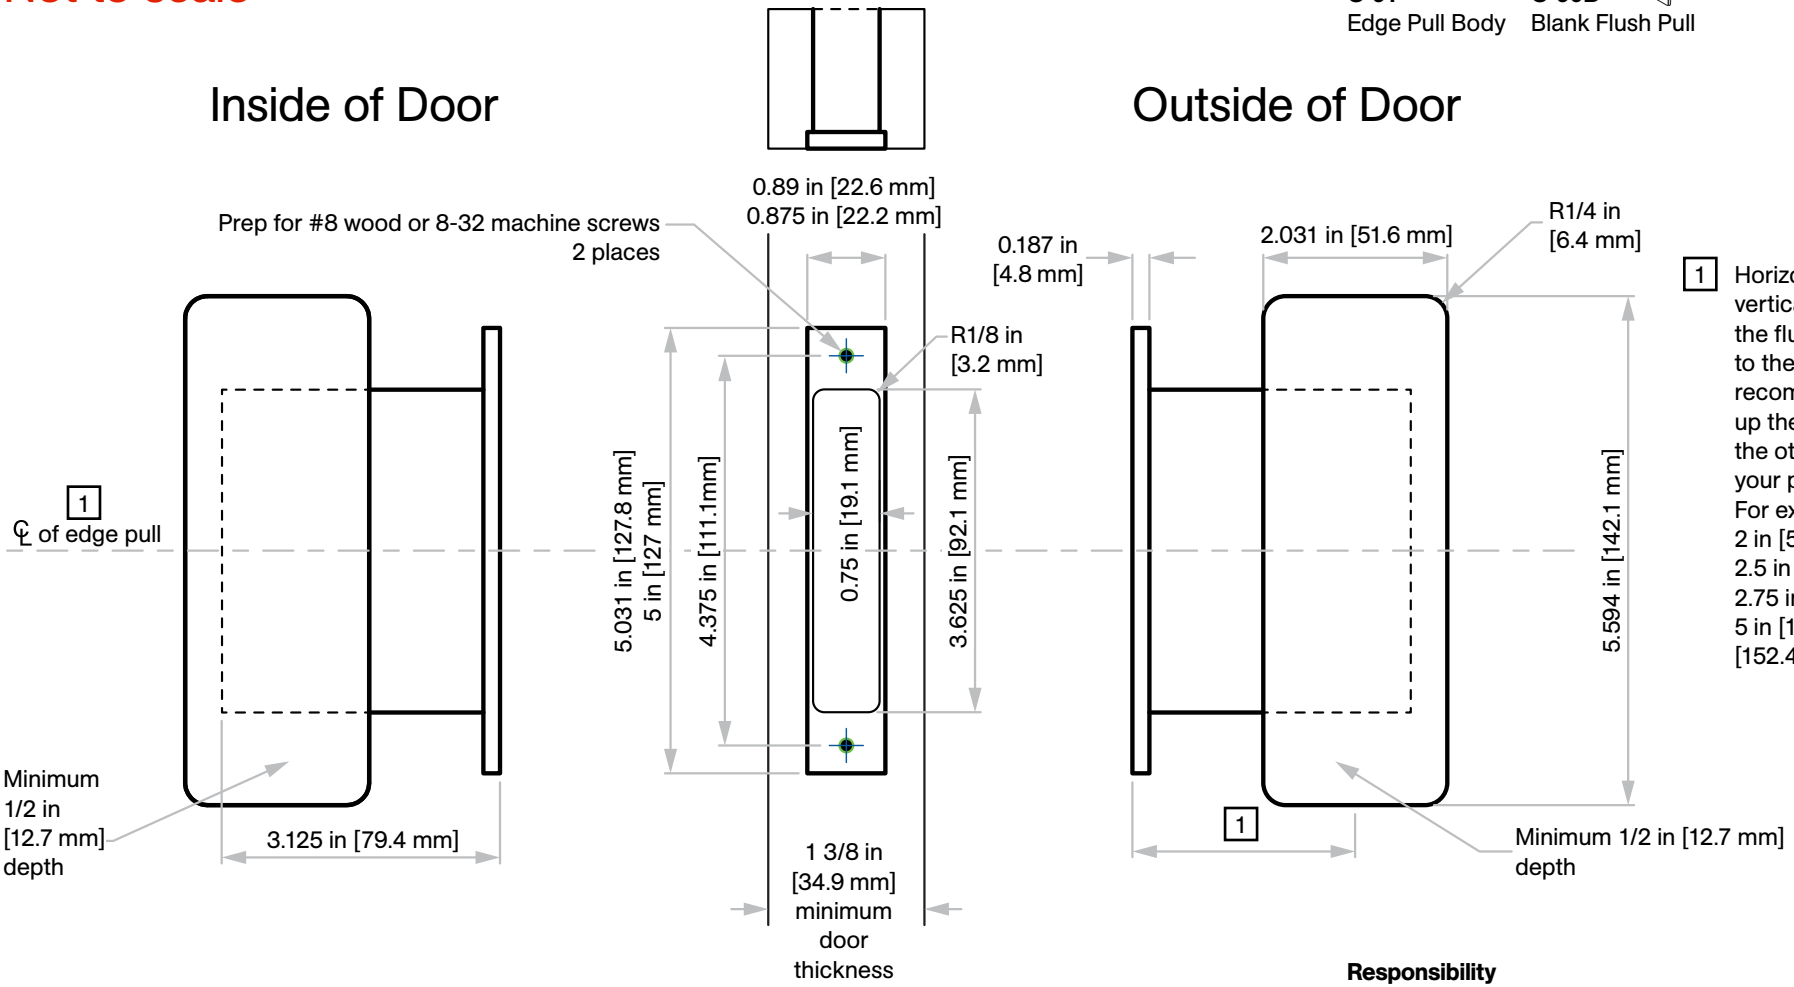

1 Horizontal and vertical spacing of the flush pulls is up to the end user. KNC recommends to line up the backset with the other locks on your project.
For example:
2 in [50.8 mm],
2.5 in [63.5 mm],
2.75 in [69.8 mm],
5 in [127 mm] and 6 in [152.4 mm]

Responsibility
Door and frame manufacturers are responsible for providing adequate construction or reinforcement for proper installation of hardware shown.

KN Crowder
1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1—866—999—1562 customerservice@kncrowder.com kncrowder.com

© 2020-2026 K.N. Crowder Mfg. Inc. All Rights Reserved.