

C-92L-CT Security Lockset

Installation Instructions

Specifications

Case: Heavy gauge wrought

Armor Front: Brass, bronze, stainless

Dead Bolt: 1/2 in [12.7 mm] thick x 1 7/32 in [31 mm] high x 1 in [25.4 mm] throw

Thumb Turn Hub: 3/16 in [4.8 mm] on the diamond

Cam: See details on right

Door Thickness: 1 3/8 in [34.9 mm] to 2 1/4 in [57.2 mm]

Cam Required: B520-233


Dimensions

W = 1.000 in [25.4 mm]


X = 0.232 in [5.9 mm]

Y = 0.729 in [18.5 mm]

Z = 0.694 in [17.6 mm]




Included Components



C-92L
Lock Body



C-90C
Cylinder
Flush Pull




C-90T
Thumb Slide
Flush Pull



Cylinder
1-5/32 in Diameter
hole x 1 in Depth.
5-PIN Schlage "C"
Key Way (will **not**
sit flush with door)

Not to scale

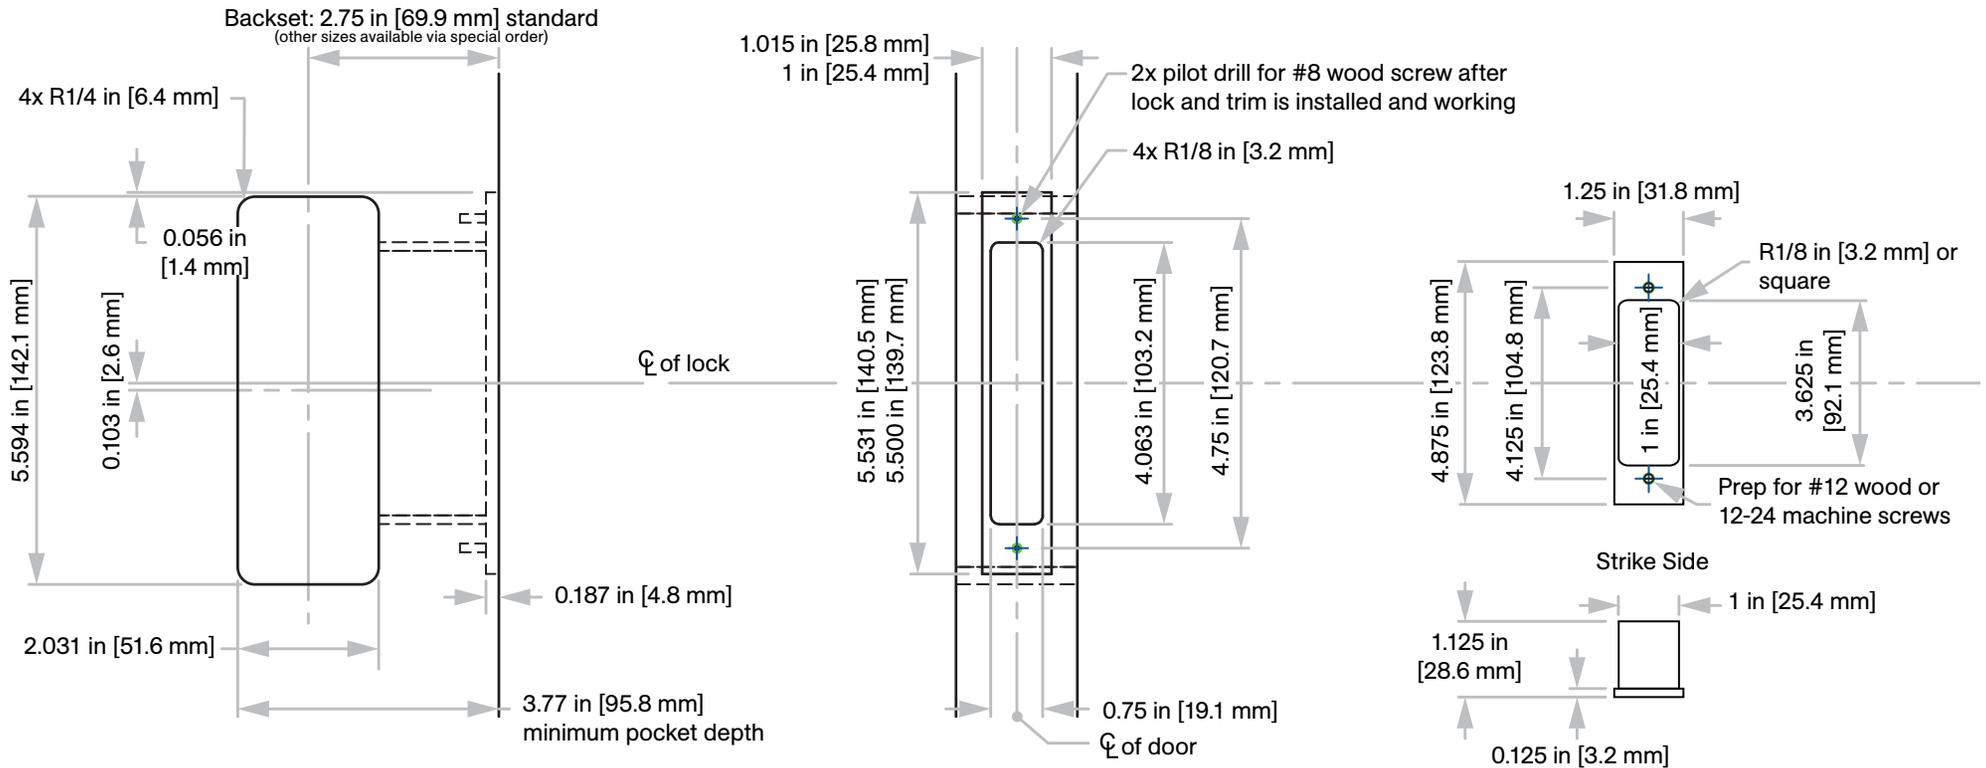

Note: Cylinder will **not** sit flush with 1 3/8 in [34.9 mm] doors.