

C-92L-HL Privacy Lockset

Barrier-Free (ADA Compliant)

Installation Instructions

Specifications

Case: Heavy gauge wrought

Armor Front: Brass, bronze, stainless

Dead Bolt: 1/2 in [12.7 mm] thick x 1 7/32 in [31 mm] high x 1 in [25.4 mm] throw


Thumb Turn Hub: 3/16 in [4.8 mm] on the diamond

Door Thickness: 1 3/8 in [34.9 mm] or 1 3/4 in [44.5 mm]


Not to scale

KNC
Door Locks & Pulls

Included Components







C-92L
Lock Body



**C-90HL /
C-90HL-138**
Handle Lever



C-90HER / C-90HER-138
Occupancy Indicator with
Coin Turn Emergency
Release

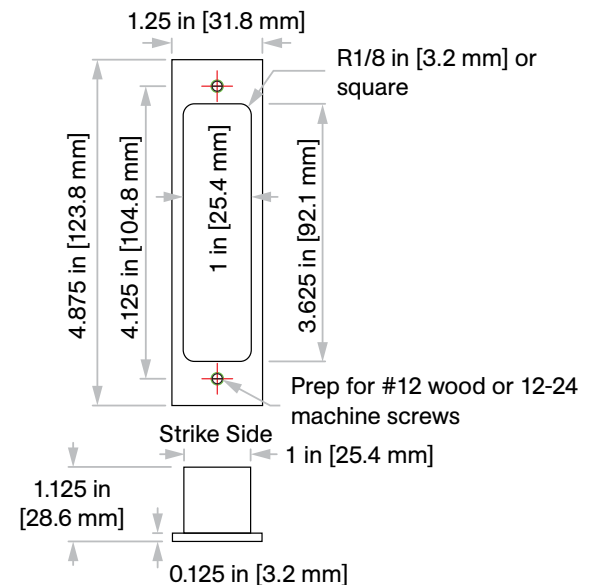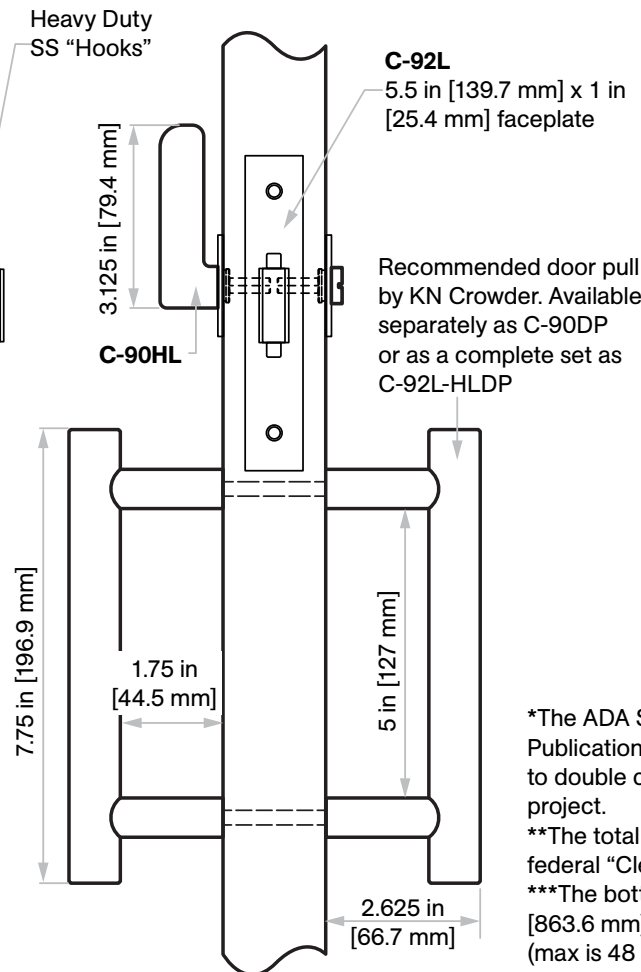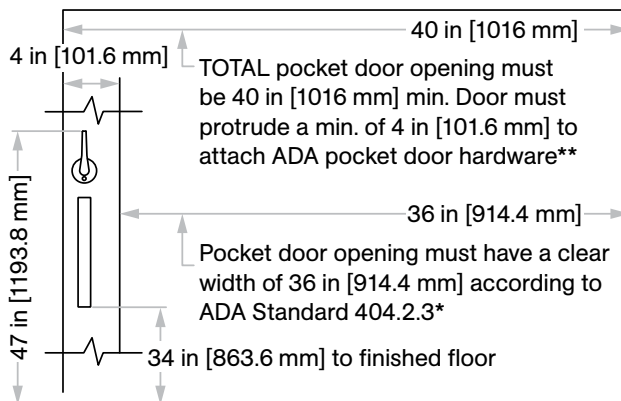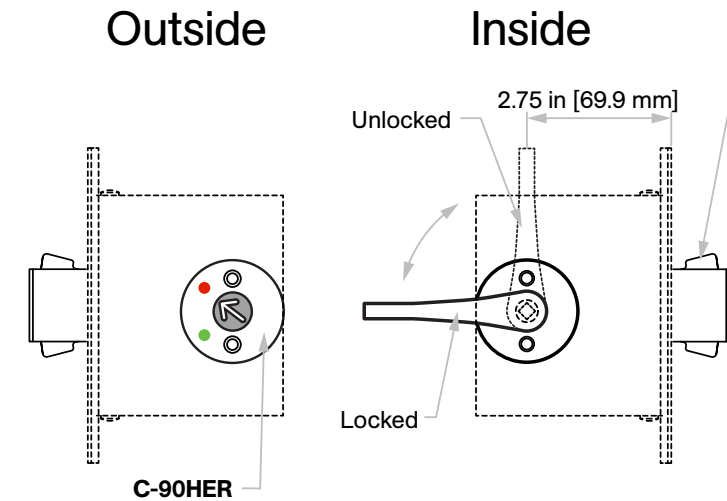


The ADA Standard 404.2.3 is from the Dept. of Justice ADA Publication of Sept 15, 2010. KN Crowder encourages the end user to double check all state and federal standards for your particular project.

**The total opening has to be 4 in [101.6 mm] greater than the federal "Clear Width" dimension to work properly.

***The bottom of the C-90DP Door Pulls must be installed 34 in [863.6 mm] from the finished floor. This will give 47 in [1193.8 mm] (max is 48 in [1219.2 mm]) from the finished floor to the top of the C-92L-HL handle, thus meeting Code 404.2.7.





Product Detail

Not to scale

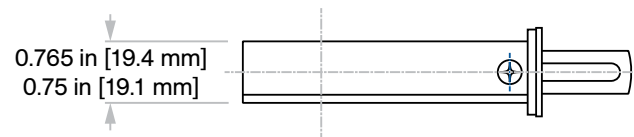


Backset:

2.75 in [69.9 mm] standard
(Other sizes available via special order)

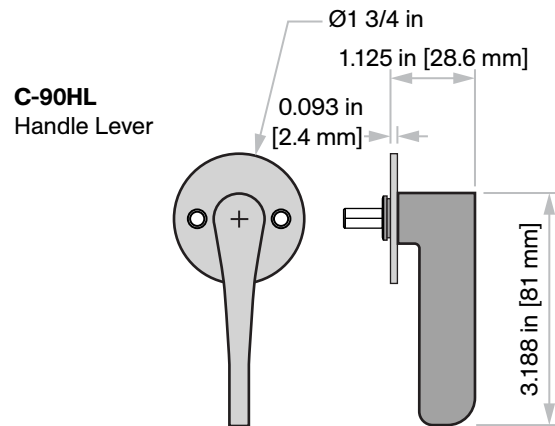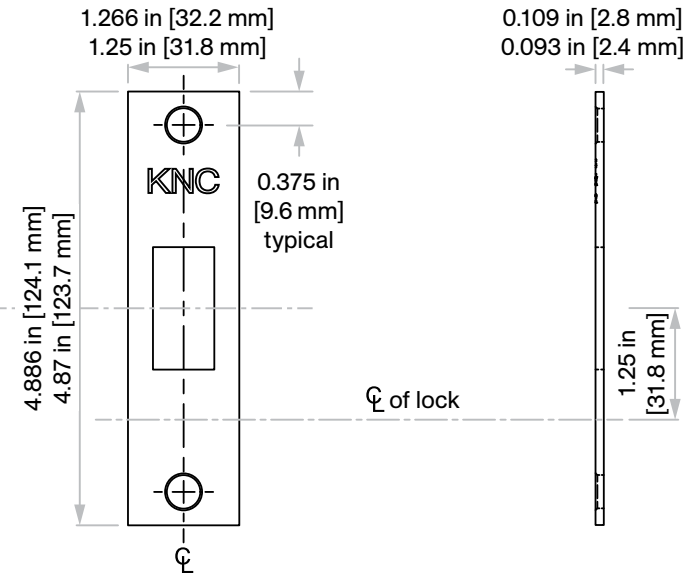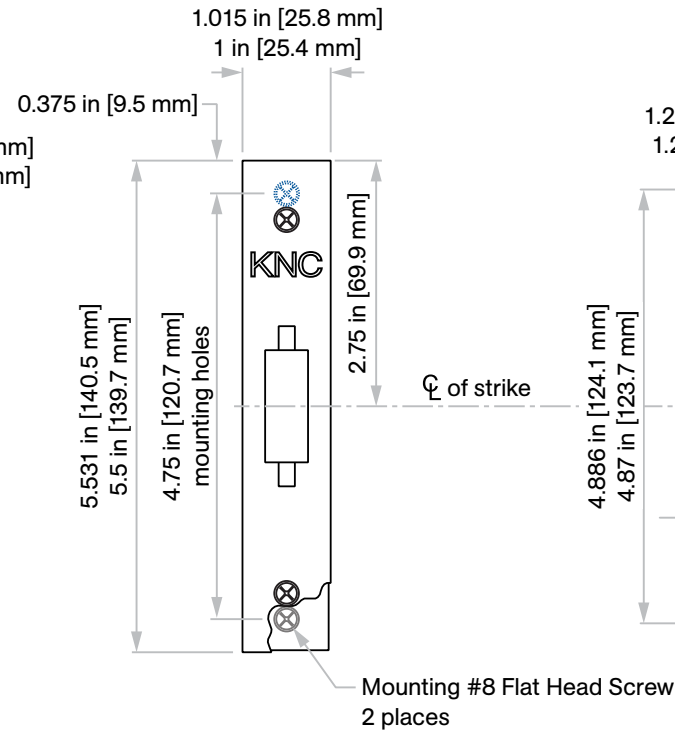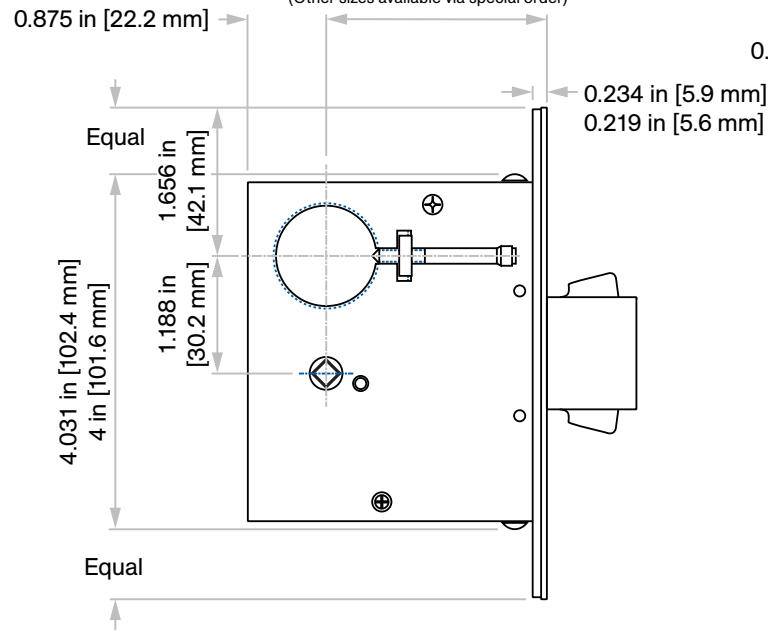


C-90HER
Occupancy Indicator
with Coin Turn
Emergency Release

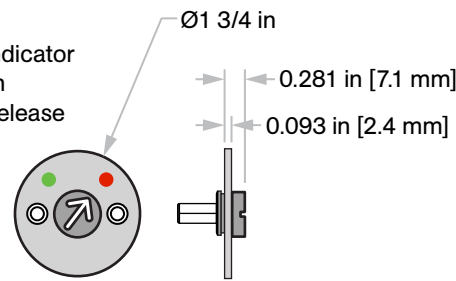

Door Prep Template

Not to scale

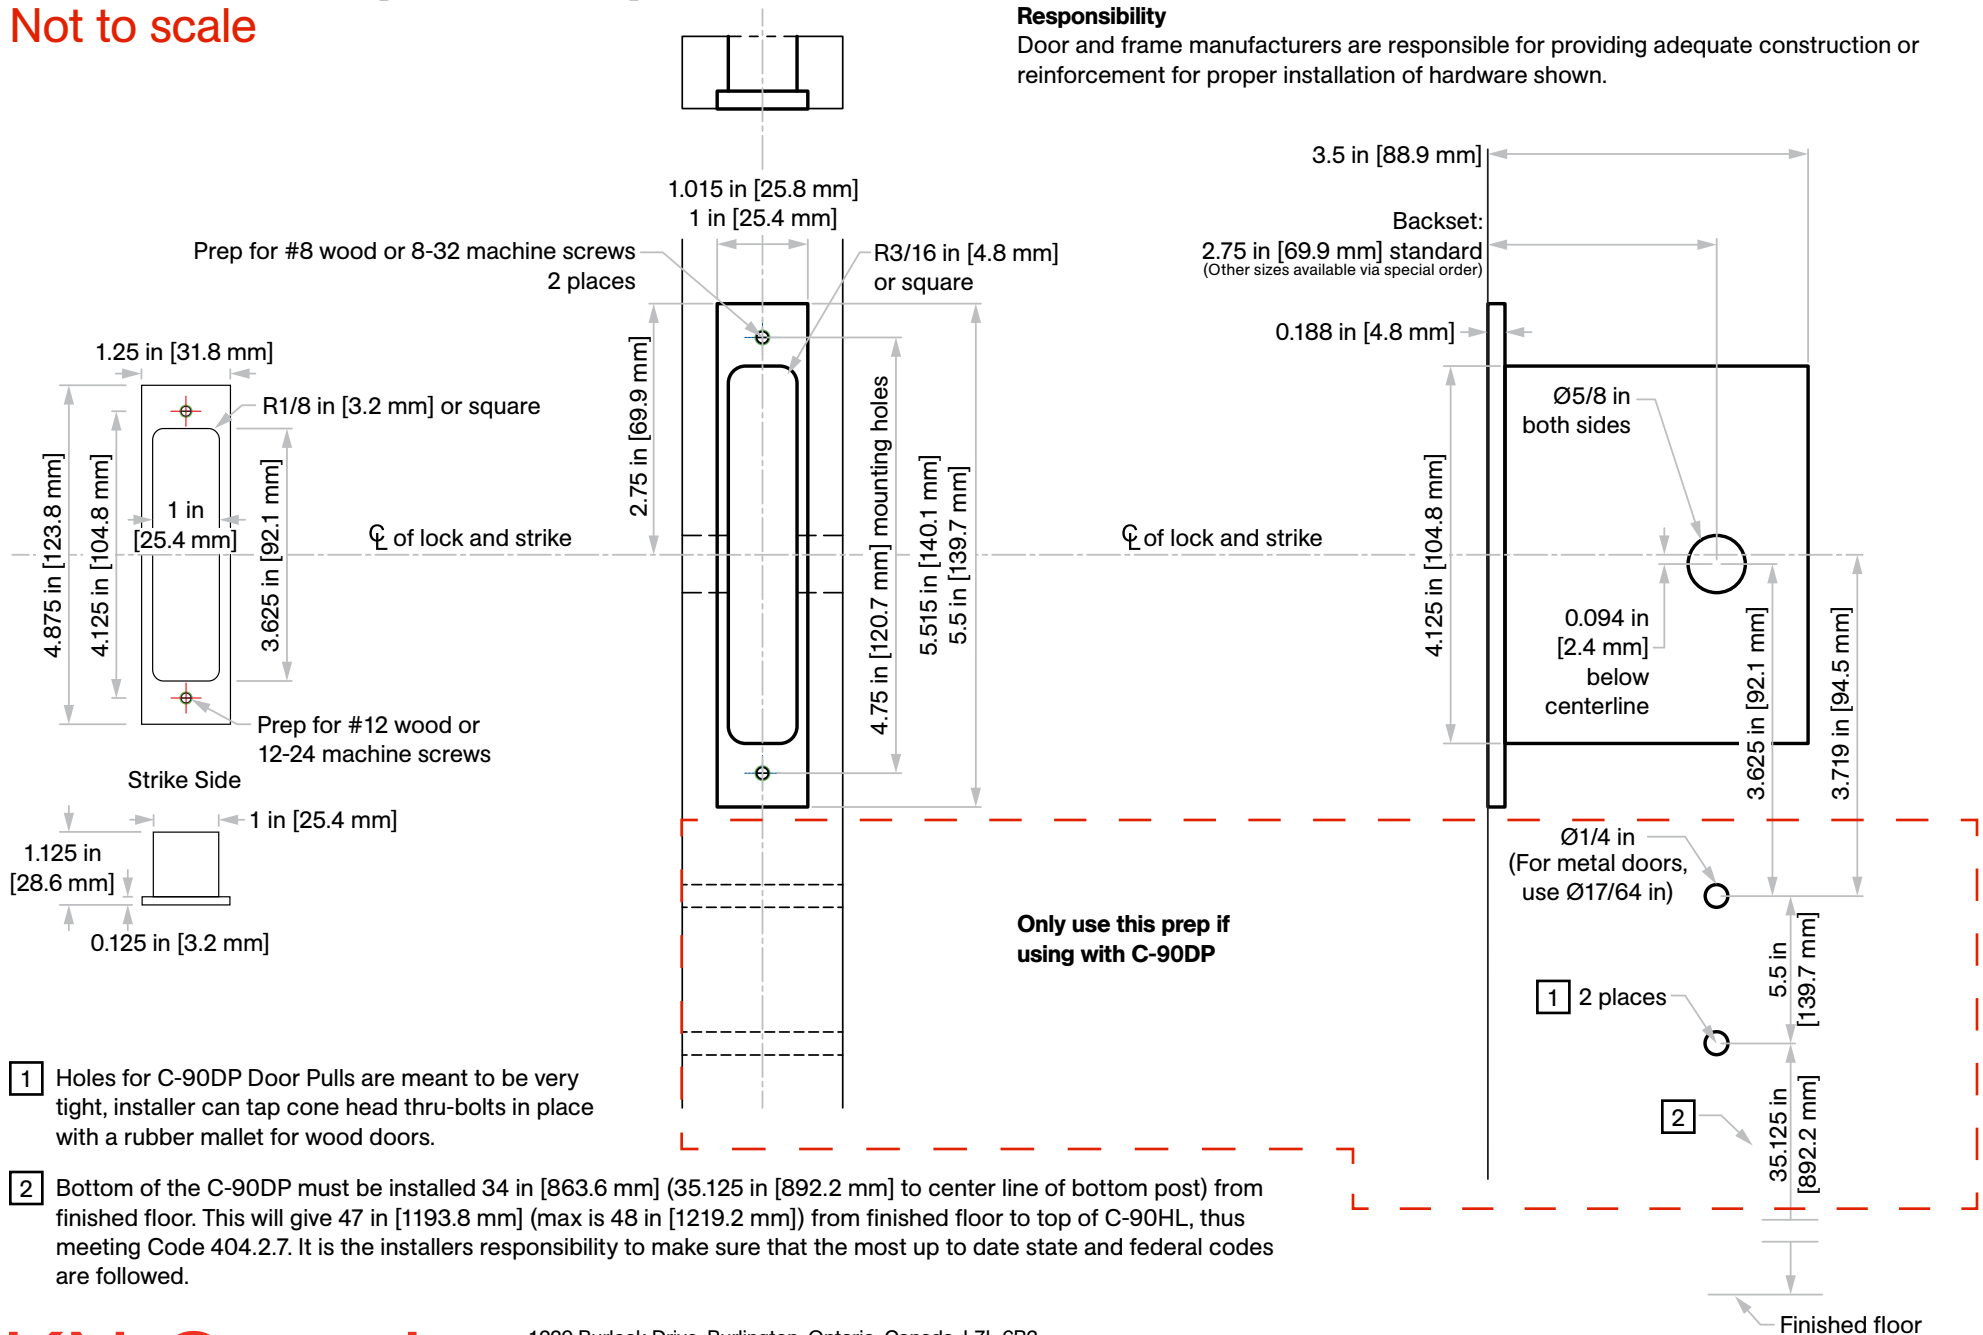

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com
© 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.