

C-94BL-HLDP Privacy Barn Door Lockset and Pulls





Barrier-Free (ADA Compliant)

Installation Instructions

Specifications

- Case:** Heavy gauge wrought
- Armor Front:** Brass, bronze, stainless
- Cam:** See details on right
- Door Thickness:** 1 3/4 in [44.5 mm]


Included Components

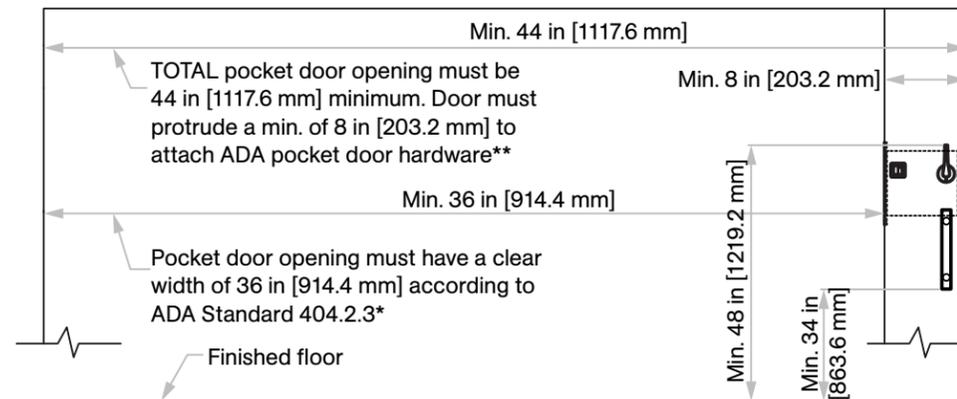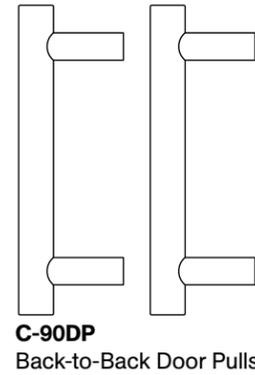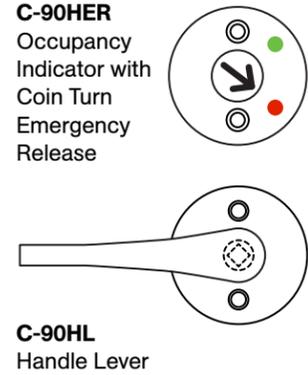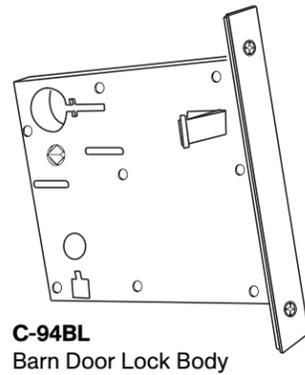

The ADA Standard 404.2.3 is from the Dept. of Justice ADA Publication of Sept 15, 2010. KN Crowder encourages the end user to double check all state and federal standards for your particular project.

**The total opening has to be 8 in [203.2 mm] minimum greater than the federal "clear width" dimension of 36 in [914.4 mm] to work properly.


***The bottom of the C-90DP pulls must be installed 34 in [863.6 mm] from the finished floor. This will give 48 in [1219.2 mm] from the finished floor to the top of the C-90HL handle, thus meeting Code 404.2.7.

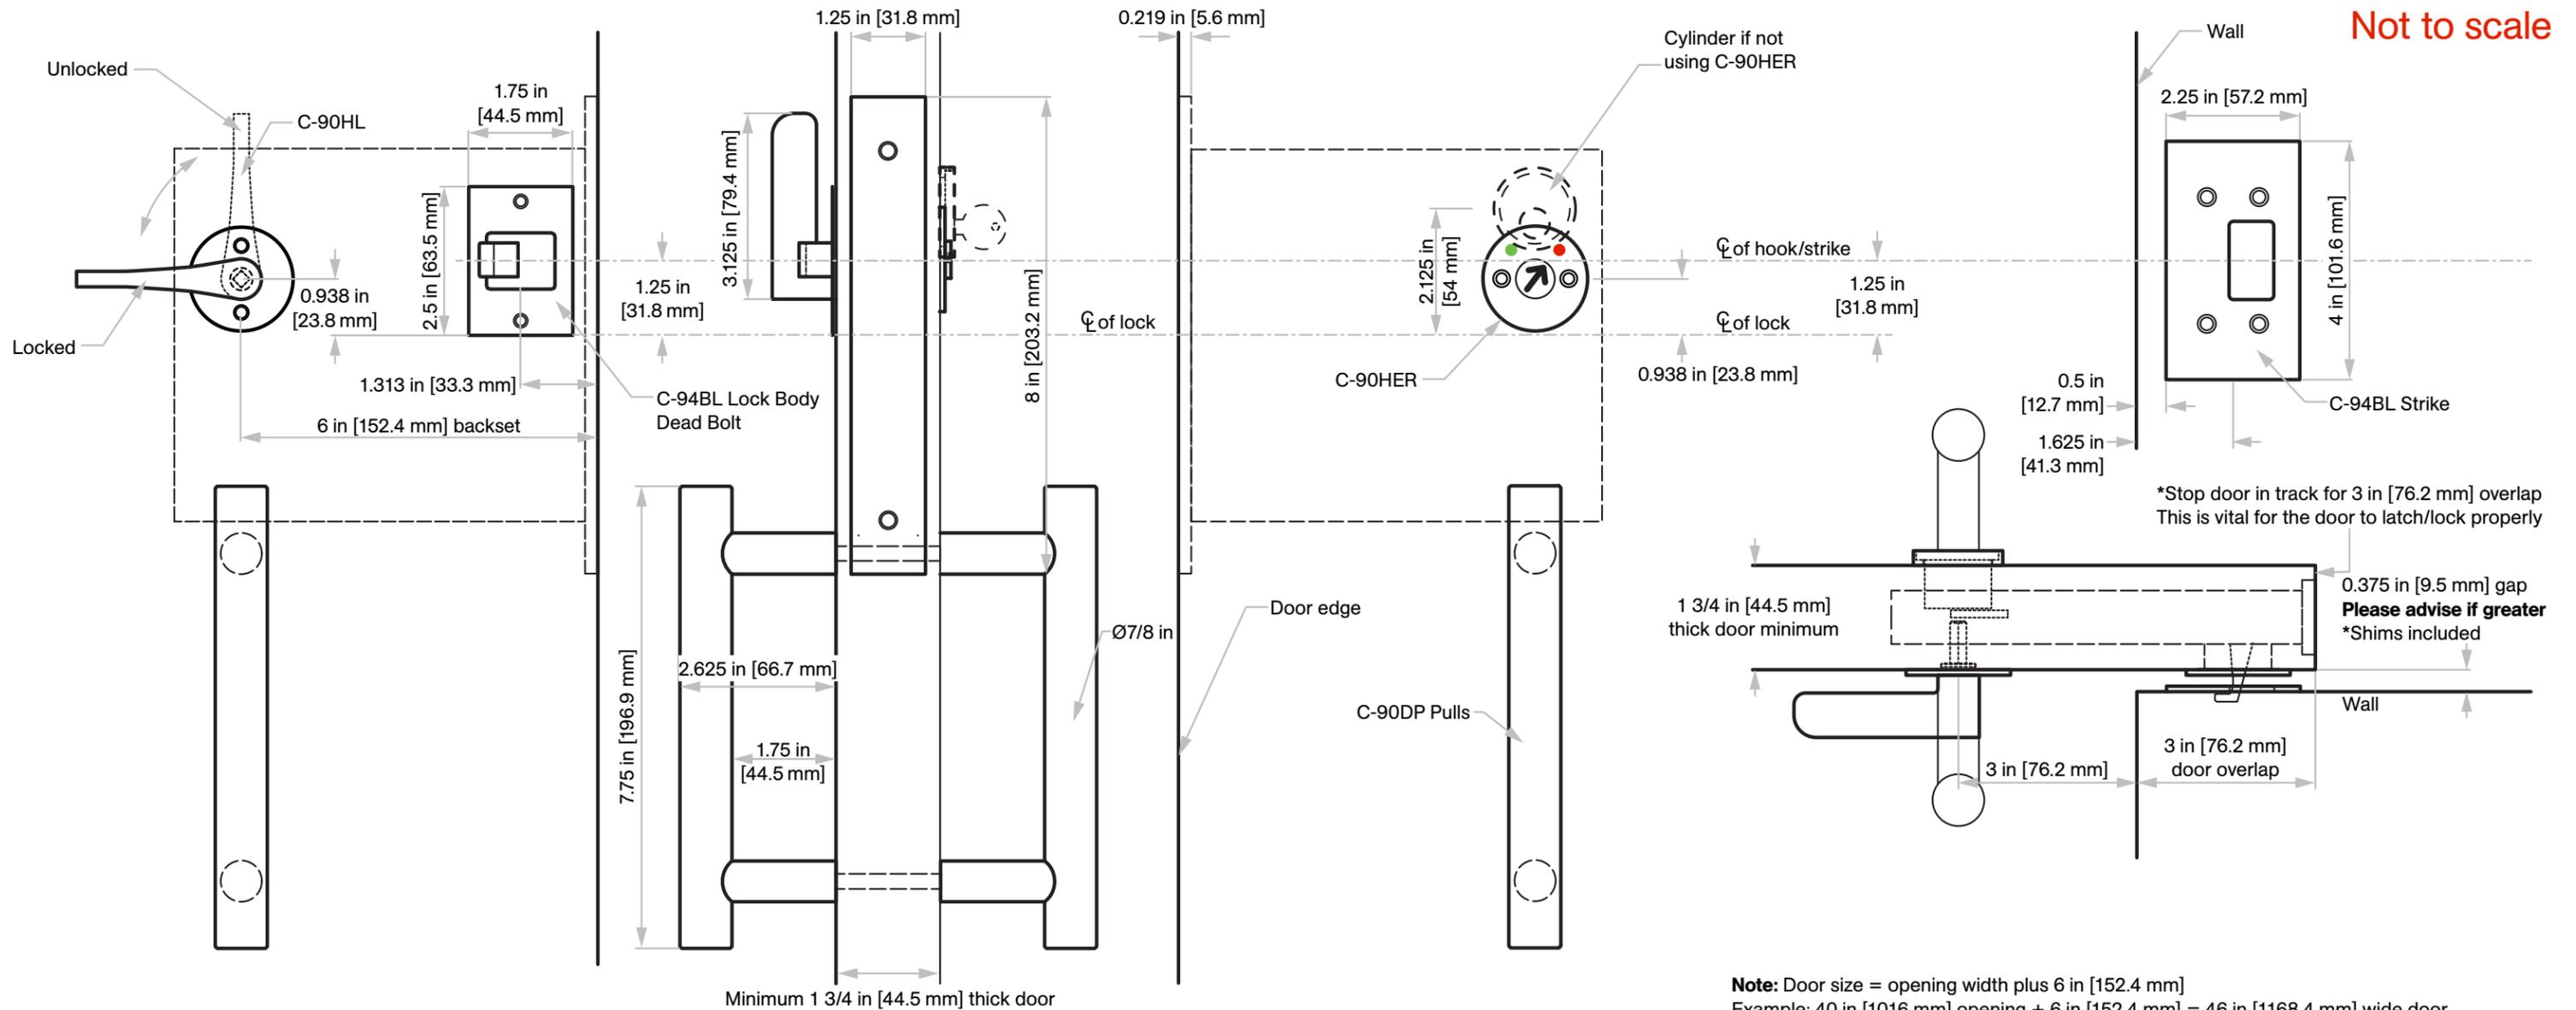



Note: Door size = opening width plus 6 in [152.4 mm]
Example: 40 in [1016 mm] opening + 6 in [152.4 mm] = 46 in [1168.4 mm] wide door

Strike Kit

Supplied Standard

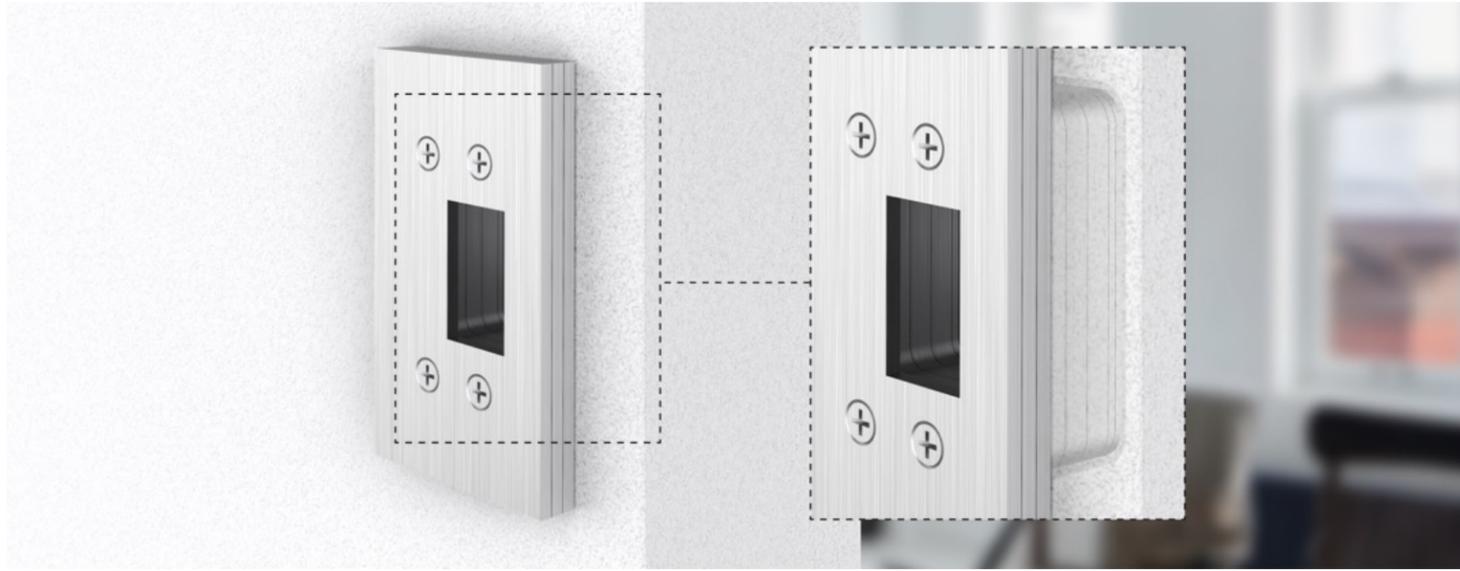

Not to scale

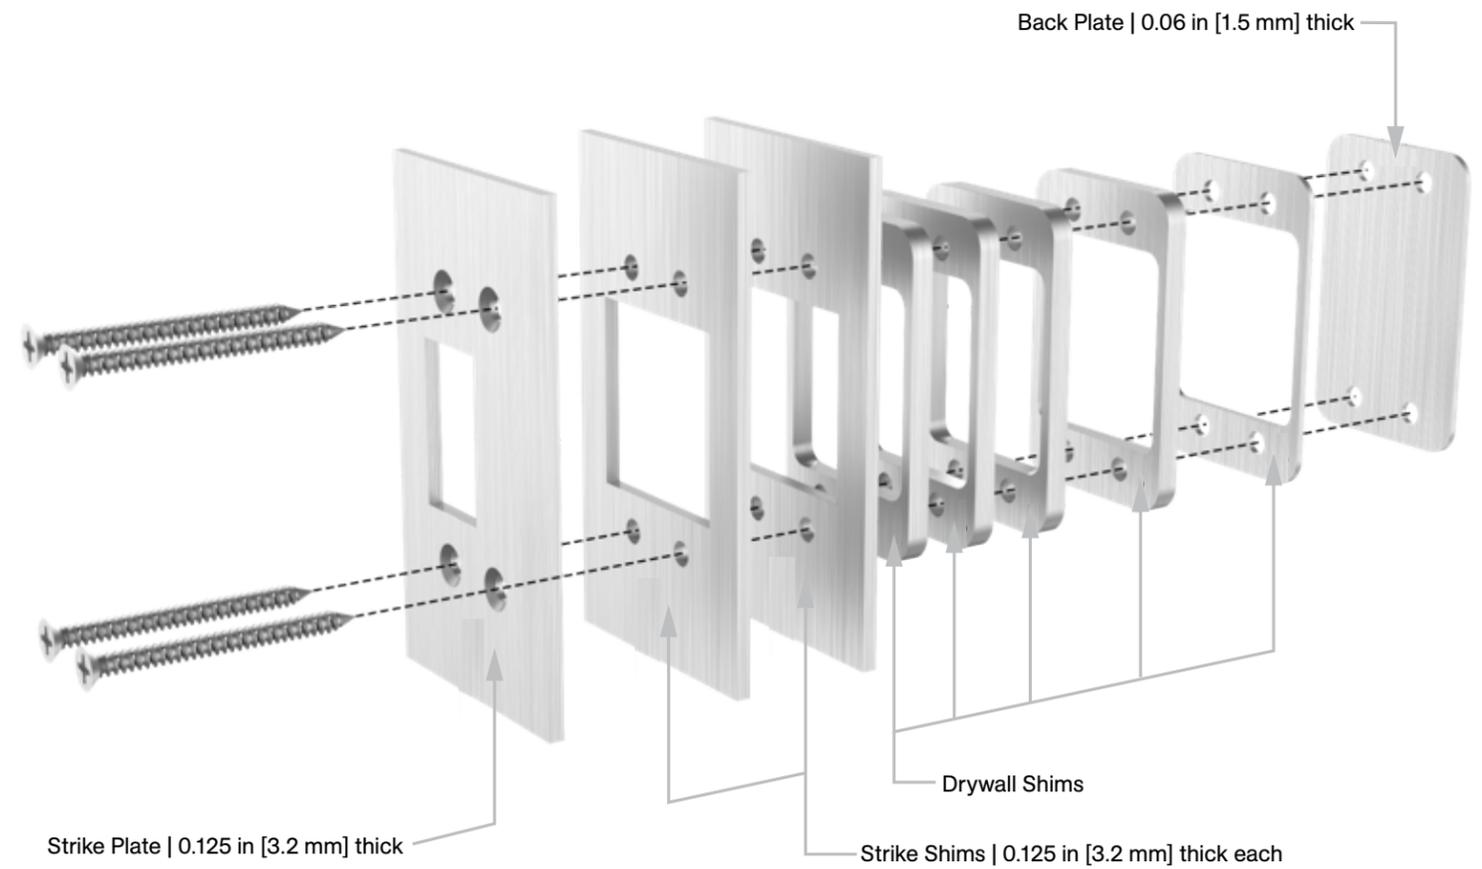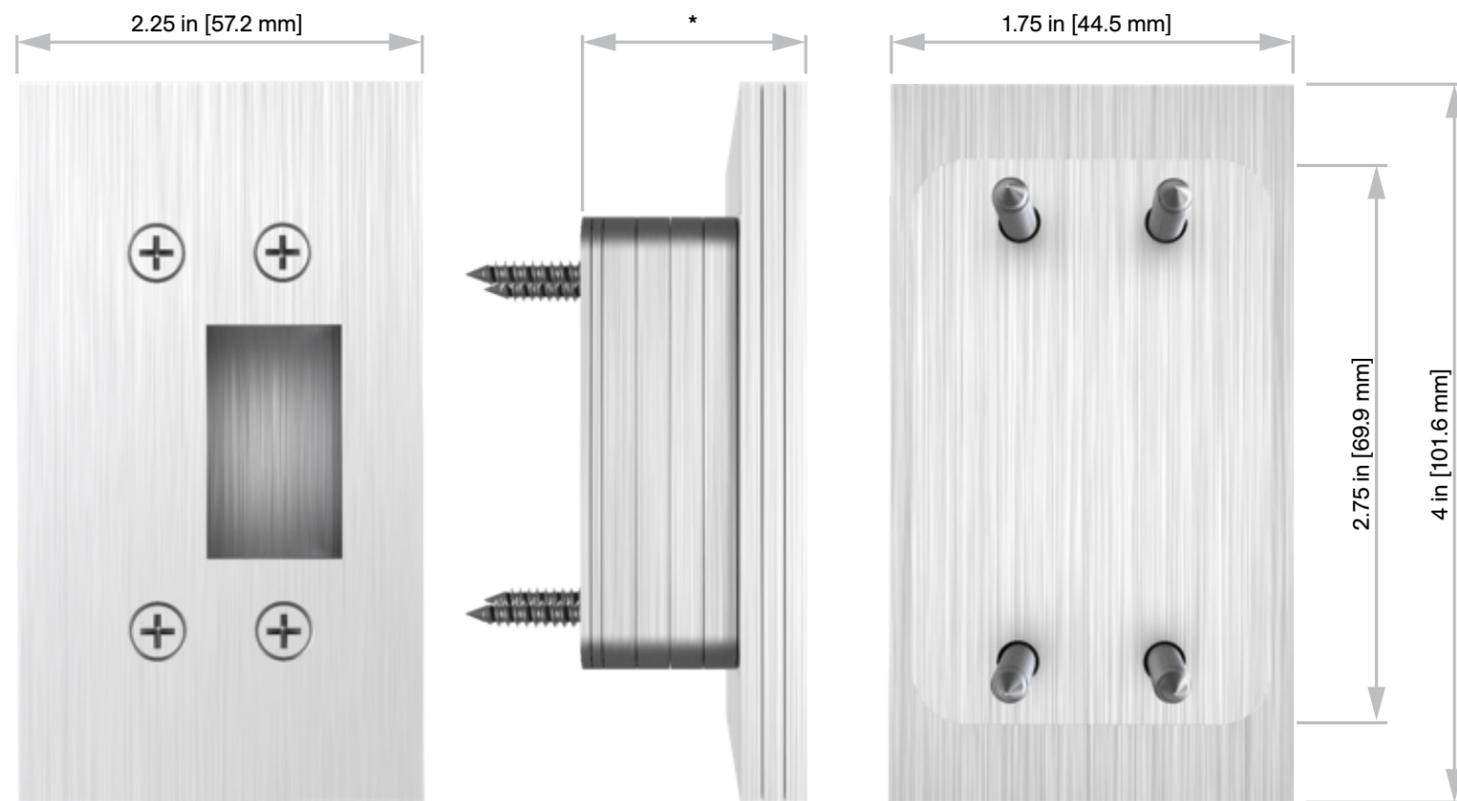

Number of drywall shims used is a function of drywall thickness.

Number of strike shims used is a function of the gap between the face of the door and the wall.