

C-95SL-CT Security Lockset

Self-Latching Flush

Installation Instructions

KNC
Door Locks & Pulls

Specifications:

Case: Heavy gauge wrought

Armor Front: Brass, bronze, stainless

Dead Bolt: 1/2 in [12.7 mm] thick x 5/8 in [15.9 mm] high x 1 in [25.4 mm] throw

Pull: 1/4 in [6.4 mm] thick x 1 1/2 in [38.1 mm] high x 7/8 in [22.2 mm] swingout

Cam: See details of cam required for cylinders used with C-95SL lock

Suitable for 1 3/4 in [44.5 mm] thick doors only

Cam Required: B520-233


Dimensions

W = 1.000 in [25.4 mm]

X = 0.232 in [5.9 mm]


Y = 0.729 in [18.5 mm]

Z = 0.694 in [17.6 mm]




Not to scale


Components Included:



C-95ESL
Entry
Self-Latching
Lock Body



C-95TFP
Thumb Turn
Self-Latching
Flush Pull




C-95CFP
Cylinder
Self-Latching
Flush Pull


Cylinder
1 in diameter
hole x 1 in
depth. 5-PIN
Schlage "C"
Key Way (will
sit flush with
door)



Inside of Door

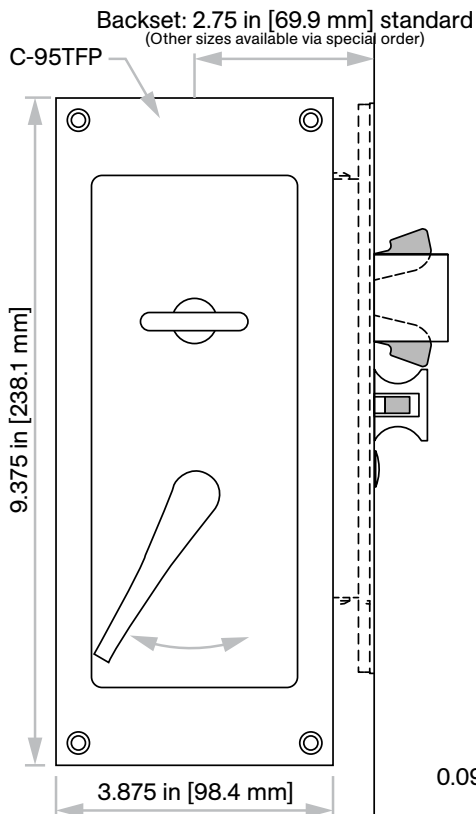

Outside of Door

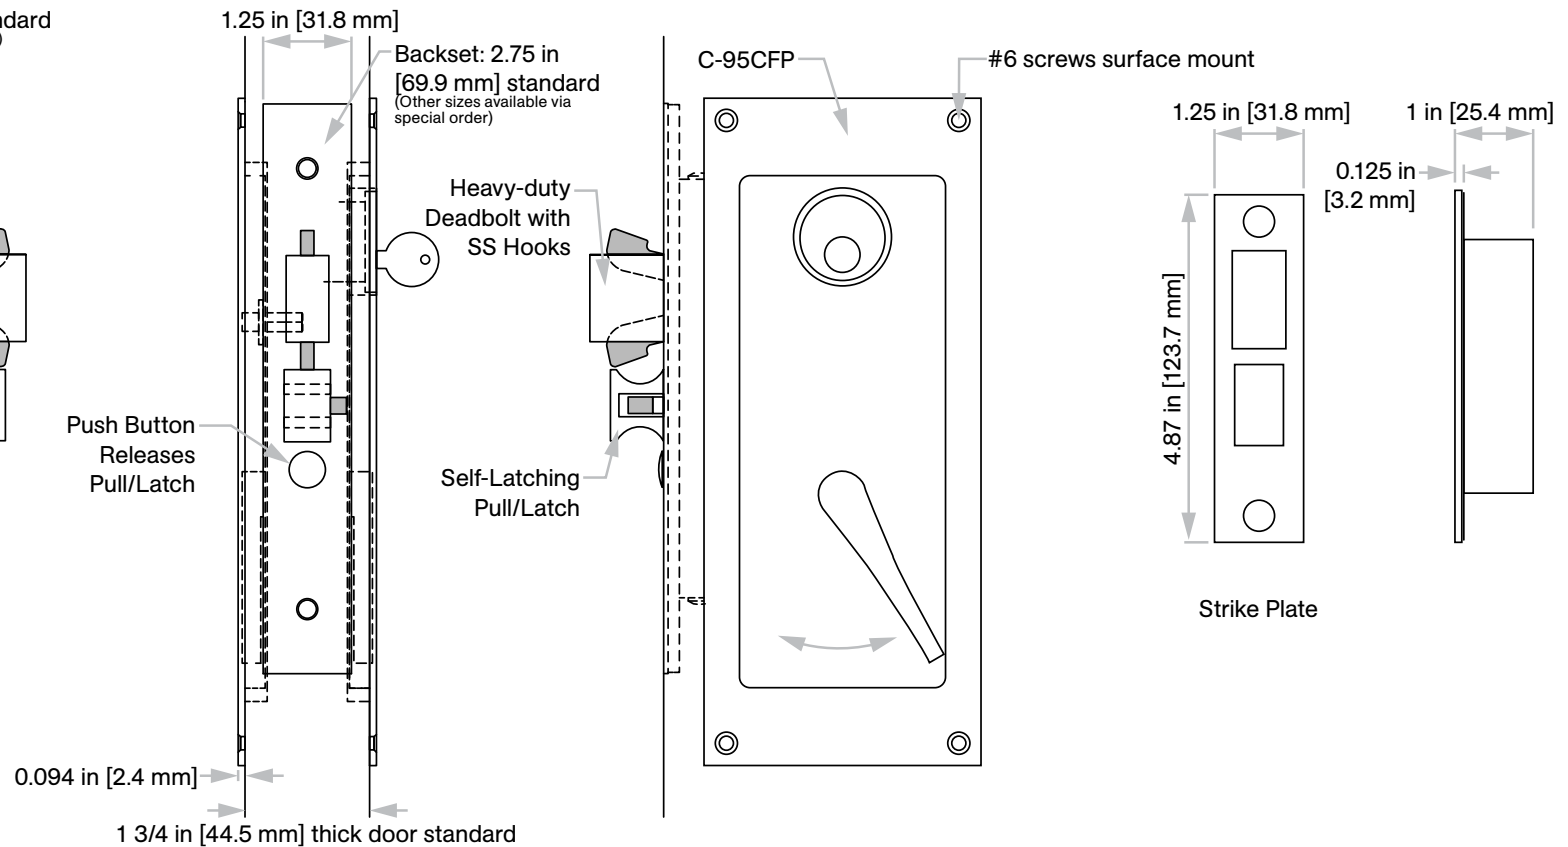

Not to scale

-

