

C-95SL-OIHL Privacy Lockset & Pulls

Self-Latching Barrier-Free (ADA Compliant)

Installation Instructions

KNC
Door Locks & Pulls

Specifications:

Case: Heavy gauge wrought


Armor Front: Brass, bronze, stainless

Dead Bolt: 1/2 in [12.7 mm] thick x 5/8 in [15.9 mm] high x 1 in [25.4 mm] throw


Pull: 1/4 in [6.4 mm] thick x 1 1/2 in [38.1 mm] high x 7/8 in [22.2 mm] swingout

Suitable for 1 3/4 in [44.5 mm] thick doors only


Components Included:




C-95PSL
Privacy
Self-Latching
Lock Body



C-95TL
ADA Turn
Self-Latching
Lever Trim



C-95OIL
ER Coin Turn/Occupancy
Indicator Self-Latching
Lever Trim


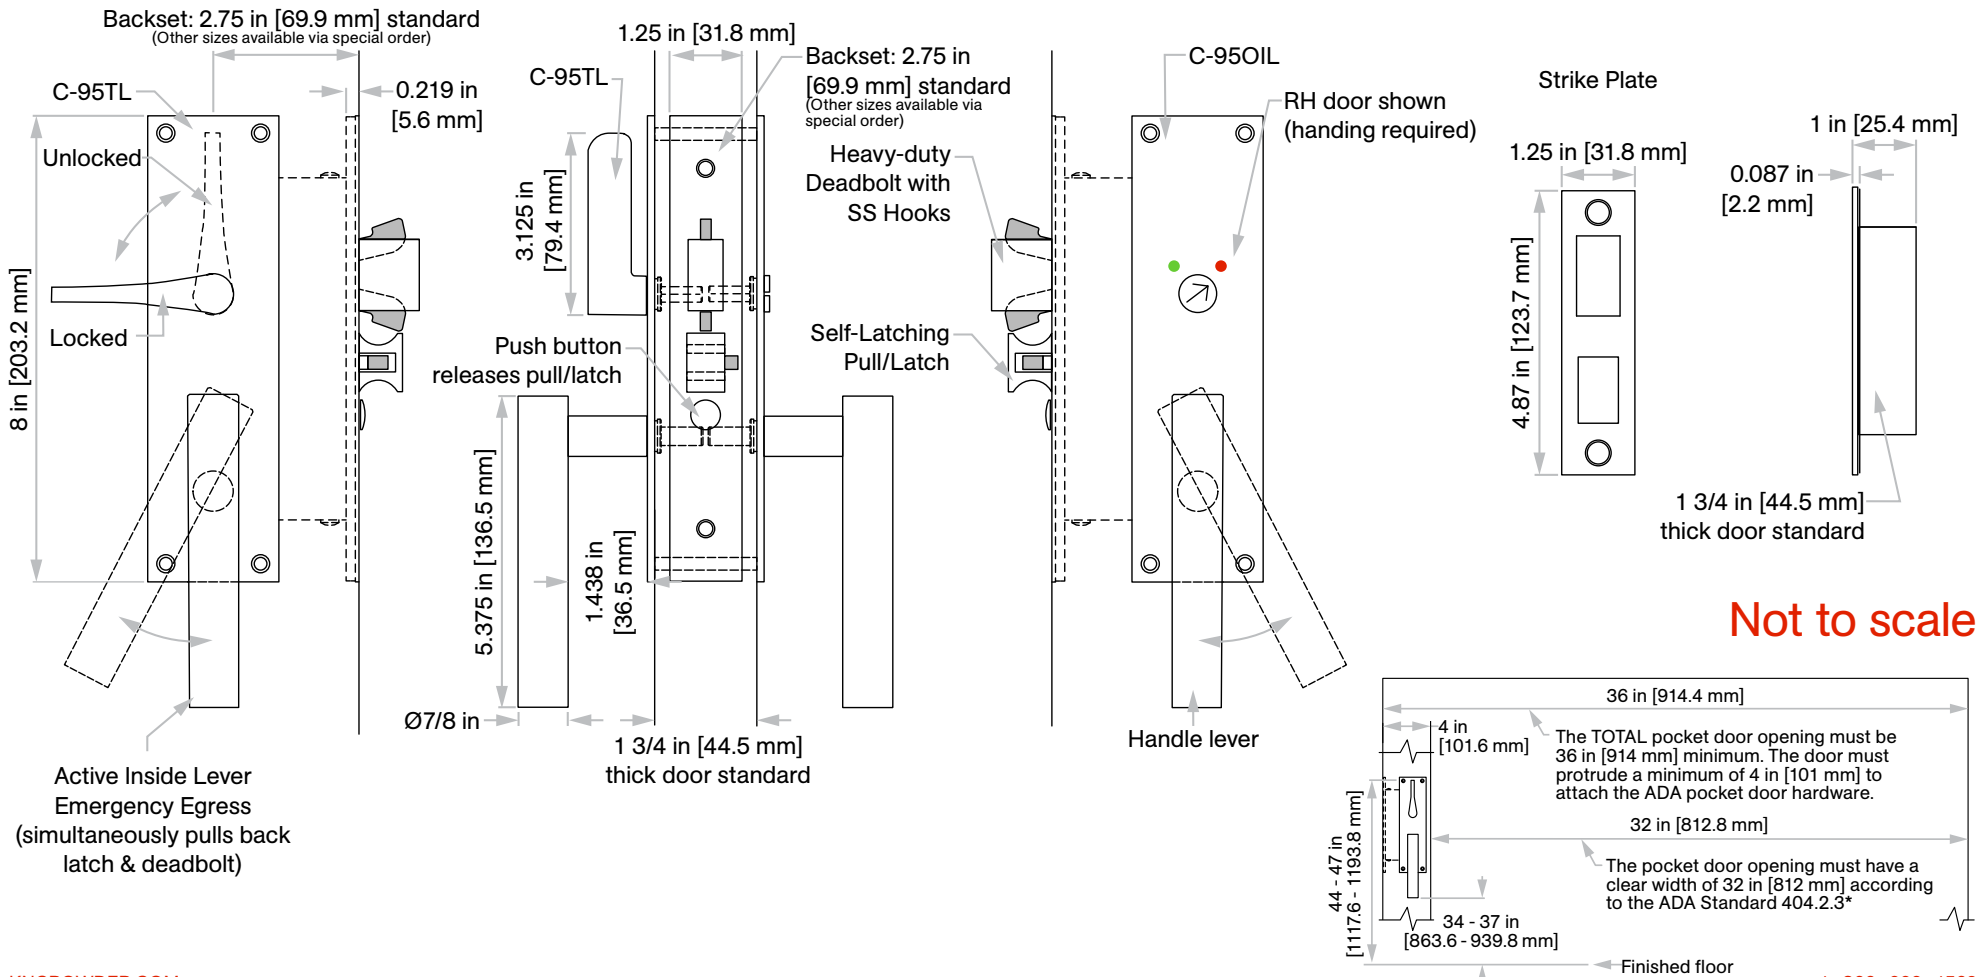


Door Prep Template

Not to scale

- 1 Insert backset here 2.5 in [63.5 mm], 2.75 in [69.9 mm], 5 in [127 mm], or 6 in [152.4 mm], optional sizes available
- 2 Prep for #12 wood or 12-24 machine screws
- 3 Centerline of strike is 0.375 in [9.5 mm] above centerline of lock

Inside of door

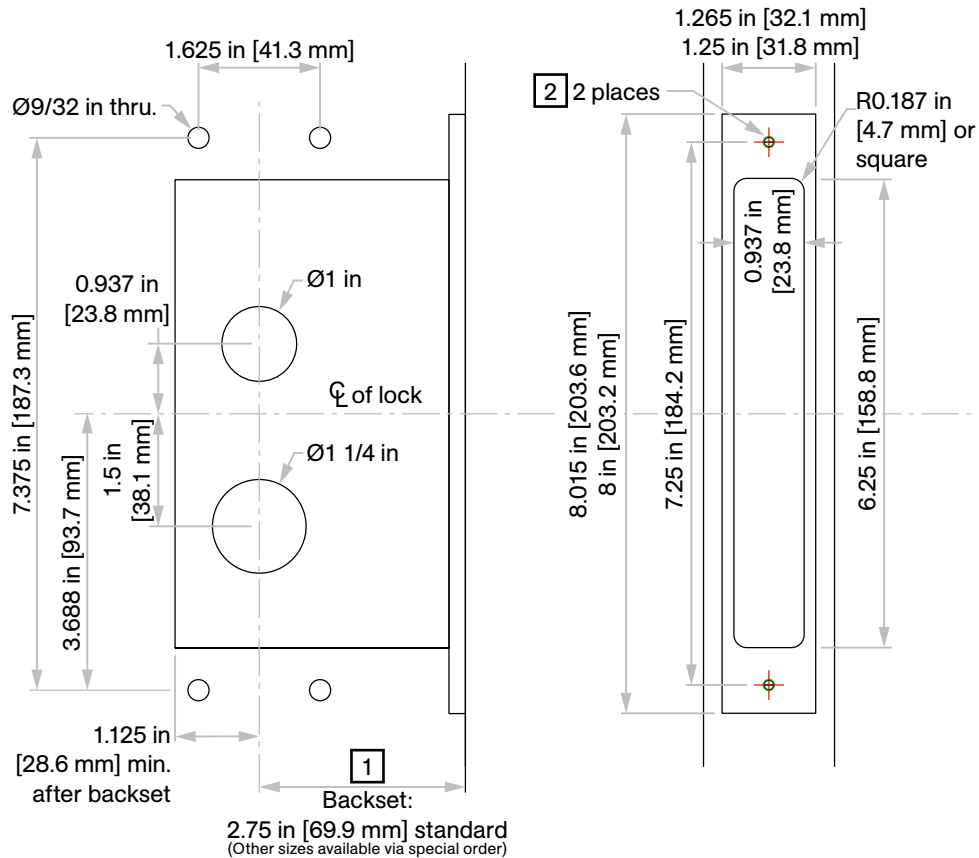

Outside of door

