

# C-95SL-OIHL Privacy Lockset and Pulls

## Self-Latching Barrier-Free (ADA Compliant)

Installation Instructions

**KNC**  
Door Locks & Pulls

### Specifications


**Case:** Heavy gauge wrought

**Armor Front:** Brass, bronze, stainless


**Dead Bolt:** 1/2 in [12.7 mm] thick x 5/8 in [15.9 mm] high x 1 in [25.4 mm] throw

**Door Thickness:** 1 3/4 in [44.5 mm]

### Included Components




**C-95PSL**  
Privacy  
Self-Latching  
Lock and  
Edge Pull  
Body



**C-95TL**  
ADA Turn  
Self-Latching  
Lever Trim



**C-95OIL**  
Occupancy Indicator  
with Coin Turn  
Emergency Release  
Self-Latching Lever Trim

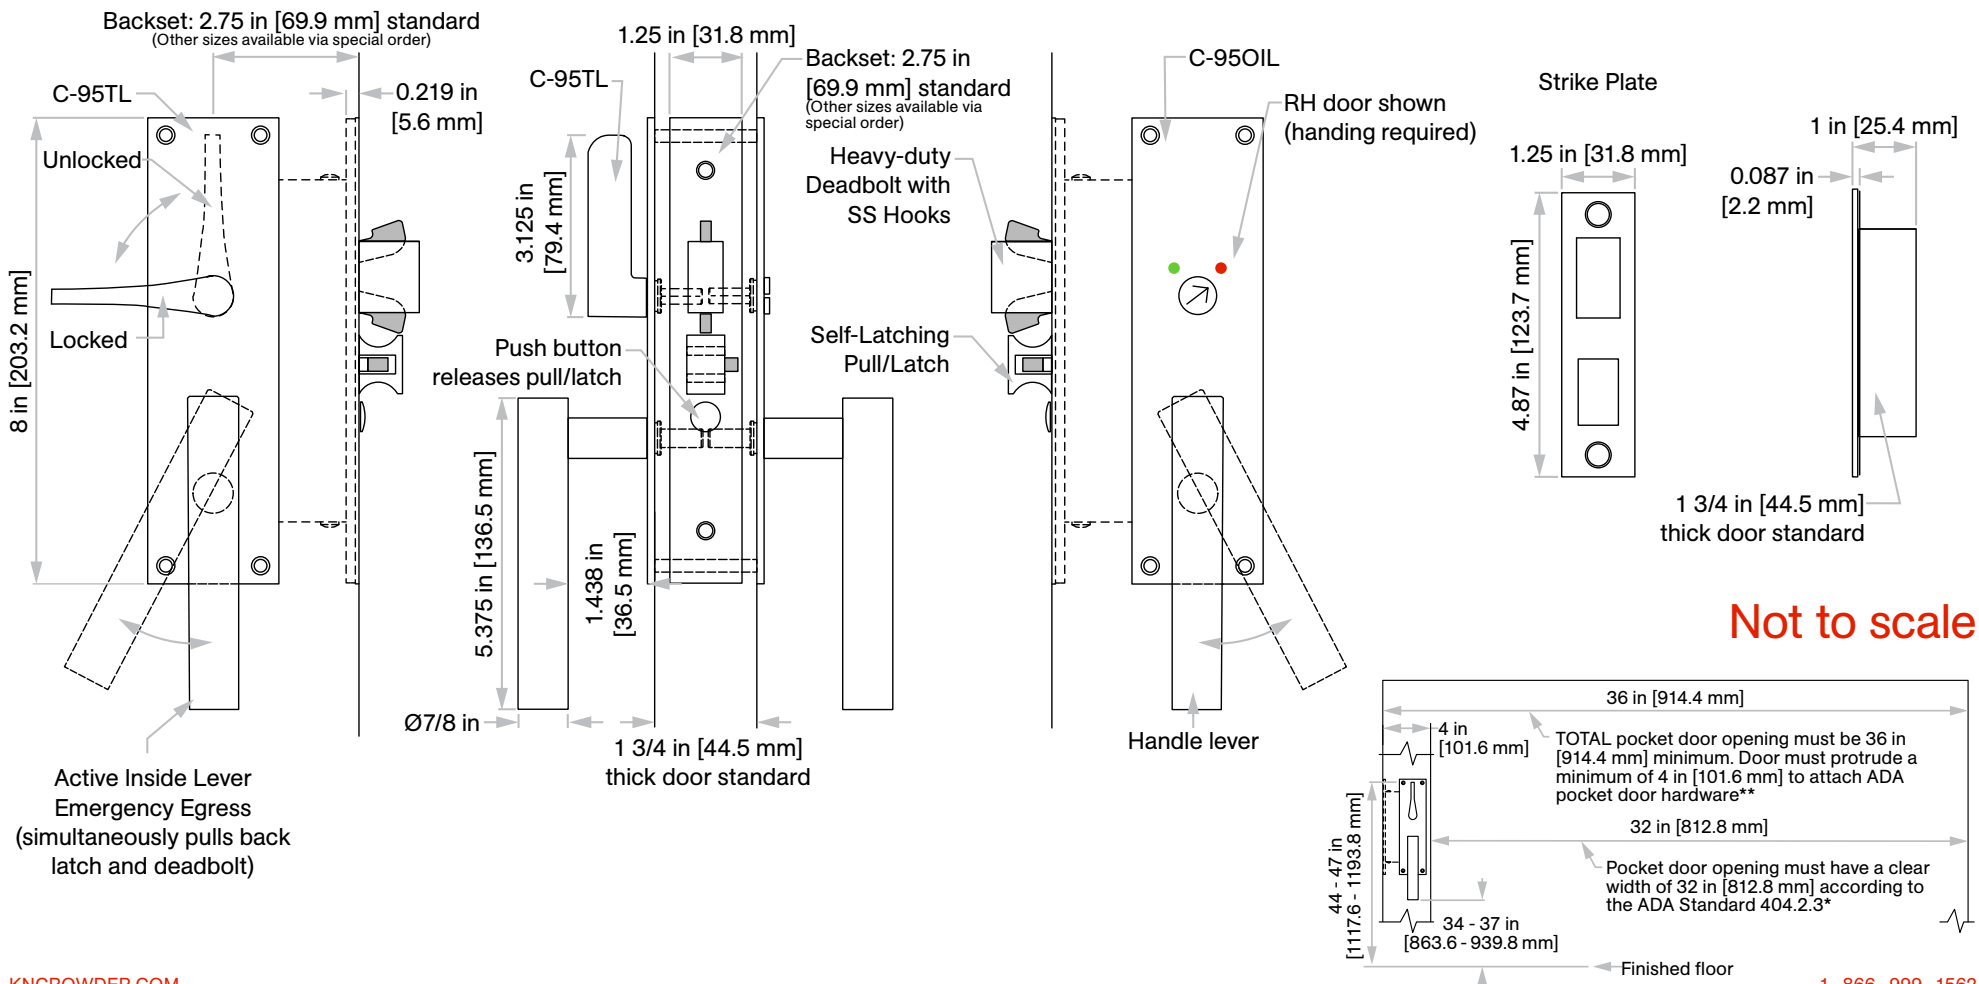


# Door Prep Template

Not to scale

- 1 Insert backset here 2.5 in [63.5 mm], 2.75 in [69.9 mm], 5 in [127 mm], or 6 in [152.4 mm], optional sizes available
- 2 Prep for #12 wood or 12-24 machine screws
- 3 Centerline of strike is 0.375 in [9.5 mm] above centerline of lock

## Inside of door

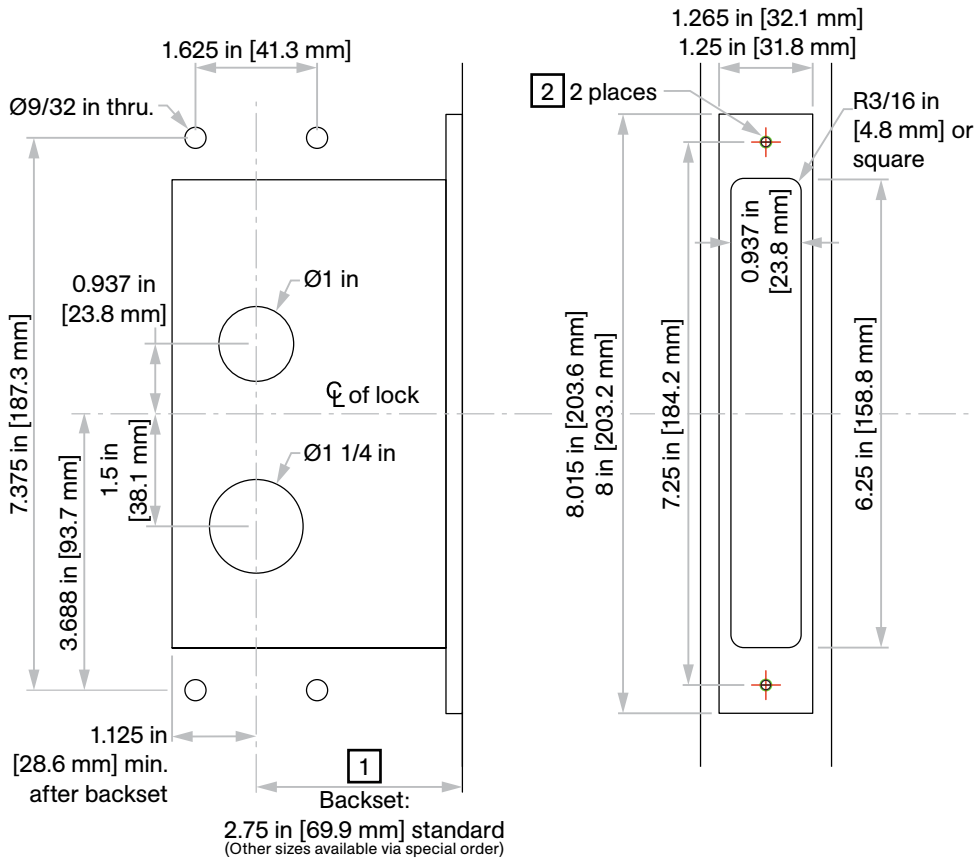

## Outside of door

