

C-95SL-OIHL Privacy Lockset and Pulls

Self-Latching Barrier-Free (ADA Compliant)

Installation Instructions

Specifications


Case: Heavy gauge wrought

Armor Front: Brass, bronze, stainless


Dead Bolt: 1/2 in [12.7 mm] thick x 5/8 in [15.9 mm] high x 1 in [25.4 mm] throw

Door Thickness: 1 3/4 in [44.5 mm] or 1 3/8 in [34.9 mm]

Included Components




C-95PSL
Privacy
Self-Latching
Lock and
Edge Pull
Body



**C-95TL /
C-95TL-138**
ADA Turn
Self-Latching
Lever Trim



C-95OIL / C-95OIL-138
Occupancy Indicator
with Coin Turn
Emergency Release
Self-Latching Lever Trim


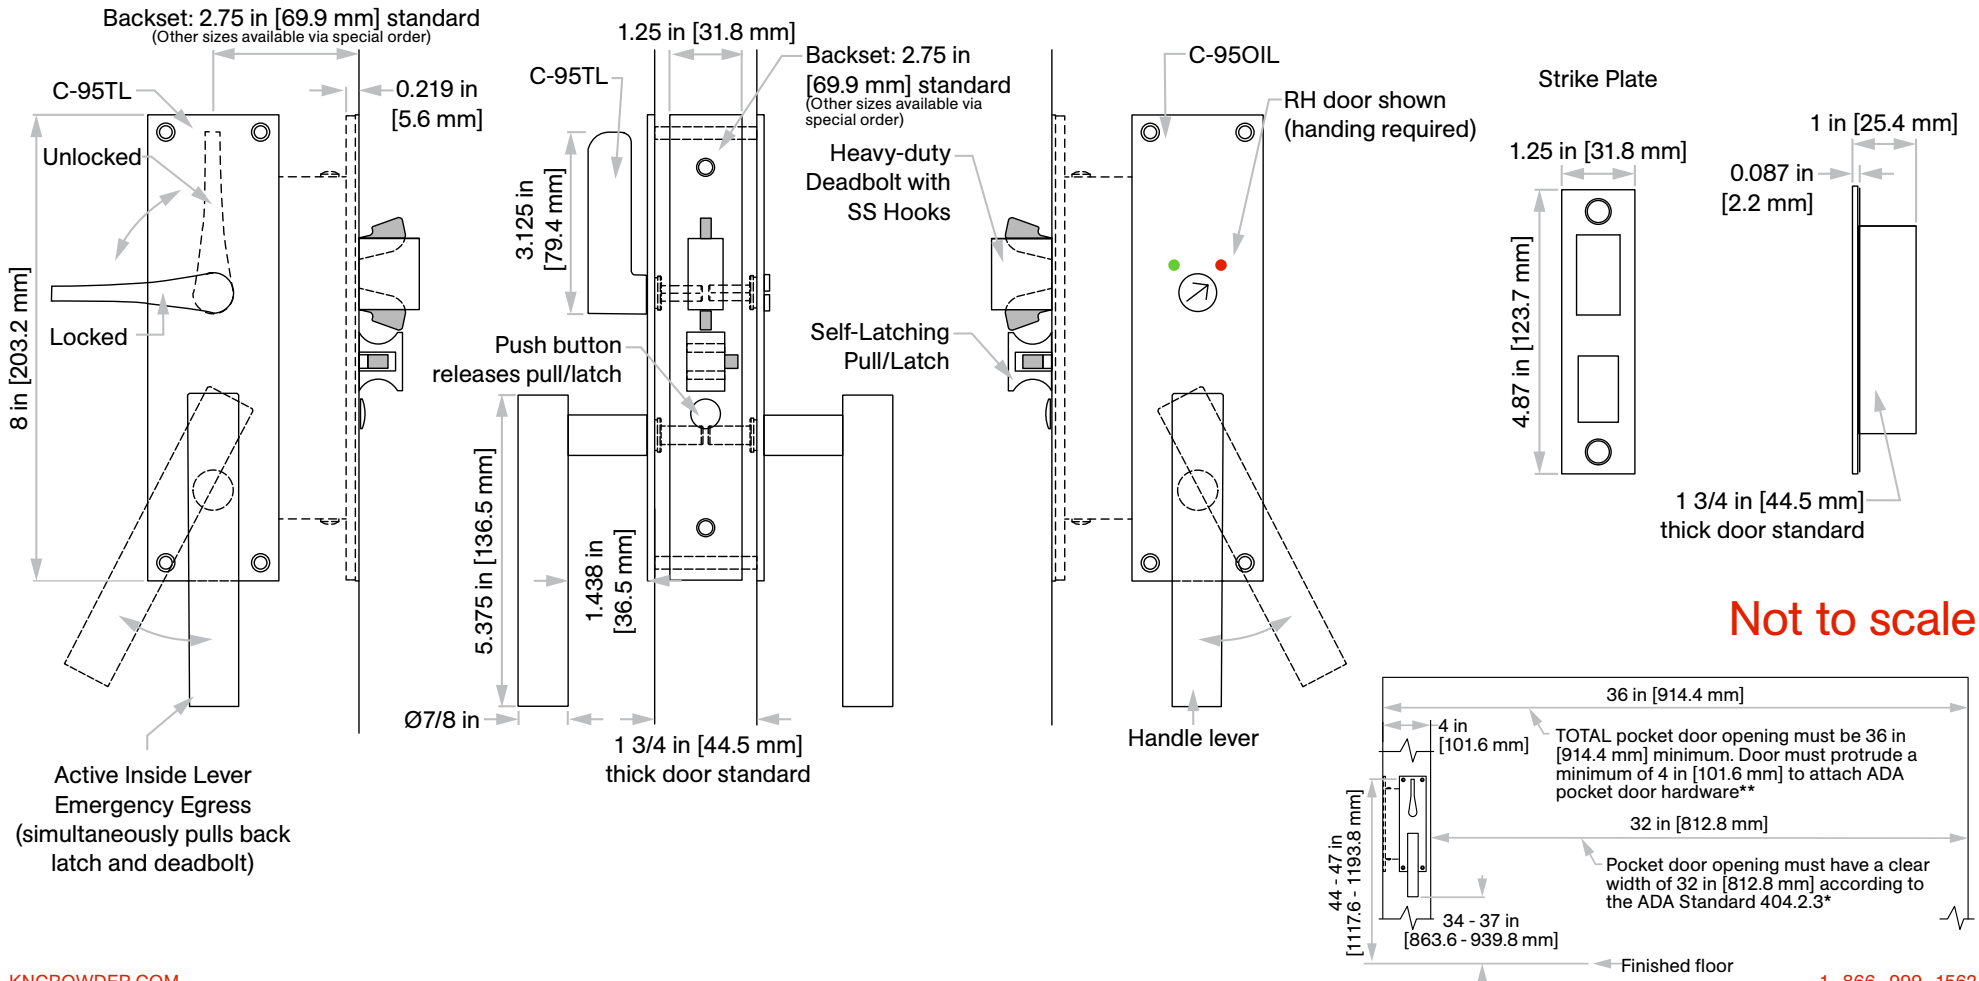


Door Prep Template


Not to scale

- 1 Insert backset here 2.5 in [63.5 mm], 2.75 in [69.9 mm], 5 in [127 mm], or 6 in [152.4 mm], optional sizes available
- 2 Prep for #12 wood or 12-24 machine screws
- 3 Centerline of strike is 0.375 in [9.5 mm] above centerline of lock

Inside of door

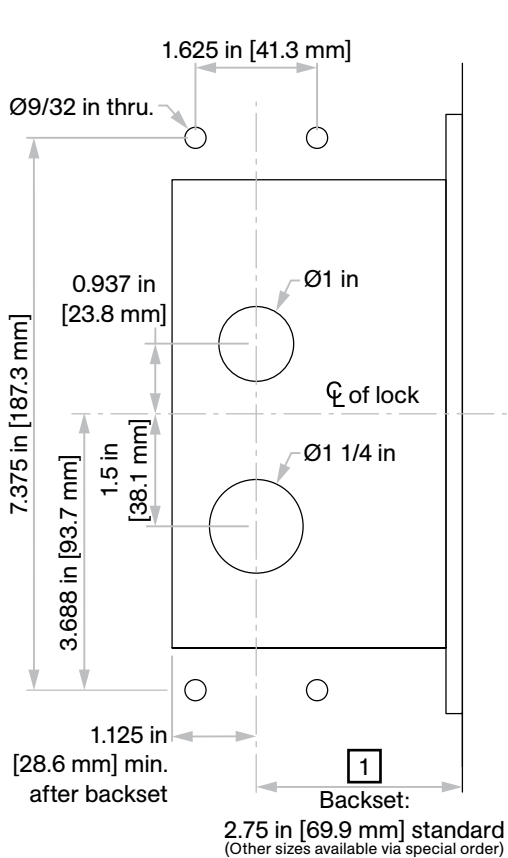

Outside of door

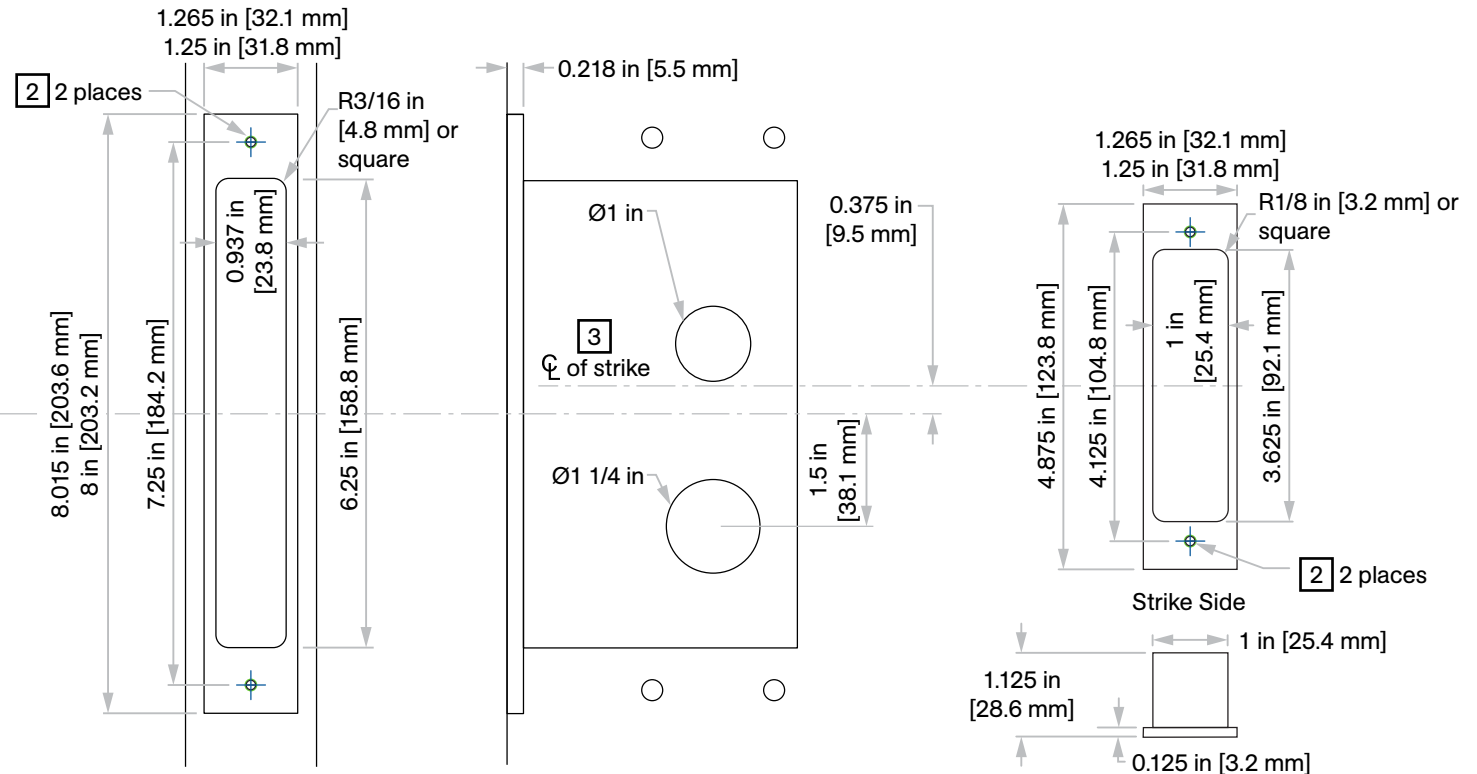

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
 T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com
 © 2020-2026 K.N. Crowder Mfg. Inc. All Rights Reserved.