CCS- and CCSF-493-B





FEATURES

- 150 lbs. [68 kg] weight capacity
- Effortless opening and closing of the door with the Catch 'N' Close Closing System (for doors wider than 18 in [457 mm])
- Easy Connect Hanger System for easy installation
- Nylon wheels and precision ball bearings provide smooth and quiet door operation
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design
- Available in clear or black anodized, mill finish or powder coated

COMPLETE 1 DOOR KIT BREAKDOWN



1 - CC-408 Side Mount Track

x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)



2 - CC-493 Easy Connect Catch 'N' Close Hangers

complete with screws and adjustment tools



2 - CC-100 Catch 'N' Close In-Track Stops

complete with set screws for friction fit



2 - Catch 'N' Close Closing Devices

complete with screws

CC-75 for doors up to 75 lbs. [34 kg]

CC-1 for doors up to 150 lbs. [68 kg]



1 - C-201 Aluminum Guide Channel

x length based on kit size (e.g. 36 in [914 mm] guide channel for 72 in [1829 mm] kit)

- C-200 Floor Guide

complete with screws

OPTIONAL

Door Locks & Pulls





Add-On Products



CC-480 Fascia


x length based on required size

CC-482 End Cap Pair

Complete with screws For use with CC-480 fascia

Customer Name	Job No./Name	Date	Provided By


Notes



CCS- and CCSF-493-B



COMPLETE ELEVATION VIEW

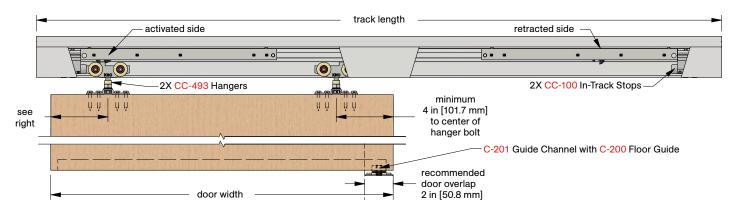


PRODUCT DIMENSIONS


* Indicates mounting flange on CC-408 Track

3/4 in


[7.9 - 15.9 mm]

23/8 in





2 31/32 in




3/4 in

[19.1 mm]

Optional CC-480 Snap-on Fascia, illustrated as solid black profile

2 3/8 in



2 31/32 in

[75.2 mm]

7/8 in

[22.0 mm]

Installation Instructions



Customer Name	Job No./Name	Date	Provided By

Notes

3/4 in

[19.1 mm]

