



FEATURES

Storm-proof Aluminum Door Louver

- Designed for 1 3/8 in [34.9 mm] to 1 3/4 in [44.5 mm] plastic laminate, wood, and hollow metal doors, including exterior applications requiring weather protection
- Sight-proof, storm-proof Z-blades with integrated water baffle at 1 5/8 in [41.2 mm] intervals
- 1 1/2 in [38.1 mm] trim frame with reinforced mitered corners
- Frame sections securely clamped into door from both sides
- .063 in [1.57 mm] thick 6063-T5 extruded aluminum
- 35% free area

CUSTOM SIZE

List door cut-out size

_____ wide x _____ high


(min. 8 in [203.2 mm] x 8 in [203.2 mm],
max. 48 in [1219.2 mm] x 90 in [2286 mm])

OPTIONS

Finish

- ☒ Mill finish

Fasteners

- ☒  #6-20 x 3/4" Hex Head Screws
- ☐  Security torx screws

Screen

- ☒ No screen
- ☐ Nylon insect screen - black fibreglass screen with 18 x 16 mesh
- ☐ Aluminum bird screen - silver aluminum screen with 18 x 16 mesh

Customer Name


Job No./Name

Date

Provided By

Notes

PRODUCT DIMENSIONS

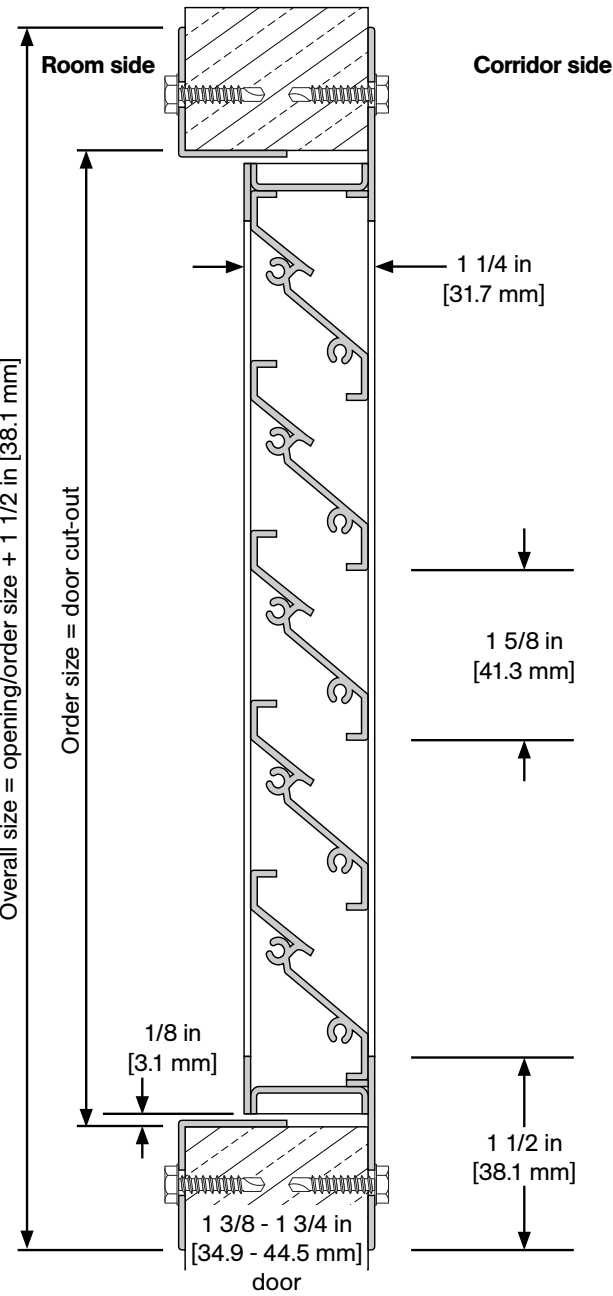

Customer Name	Job No./Name	Date	Provided By
_____	_____	_____	_____

Notes