

CDL-SP

Stormproof Louver

KNC



Stormproof aluminum "Z" blades incorporate a water baffle, suitable for exterior applications where weather protection is required.

Specifications

Material

.063" thick 6063-T5 extruded aluminum.
Minimum size is 8 in [203.2 mm] x 8 in [203.2 mm]
Maximum size is 48 in [1219.2 mm] x 90 in [2286 mm]

Construction

Louver: "Z" blades with water baffle at 1 5/8 in [41.2 mm] intervals.
Non-vision design. Frame: 1/2 in [12.7 mm] trim with reinforced mitered corners. Louver frame is screwed into door from 2 sides.

Door

For 1 3/8 in [34.9 mm] to
1 3/4 in [44.5 mm] thick

Fasteners


#8 x 3/4" phillips head screws

Finish

Standard aluminum mill finish

Free Flow Area

35% free area

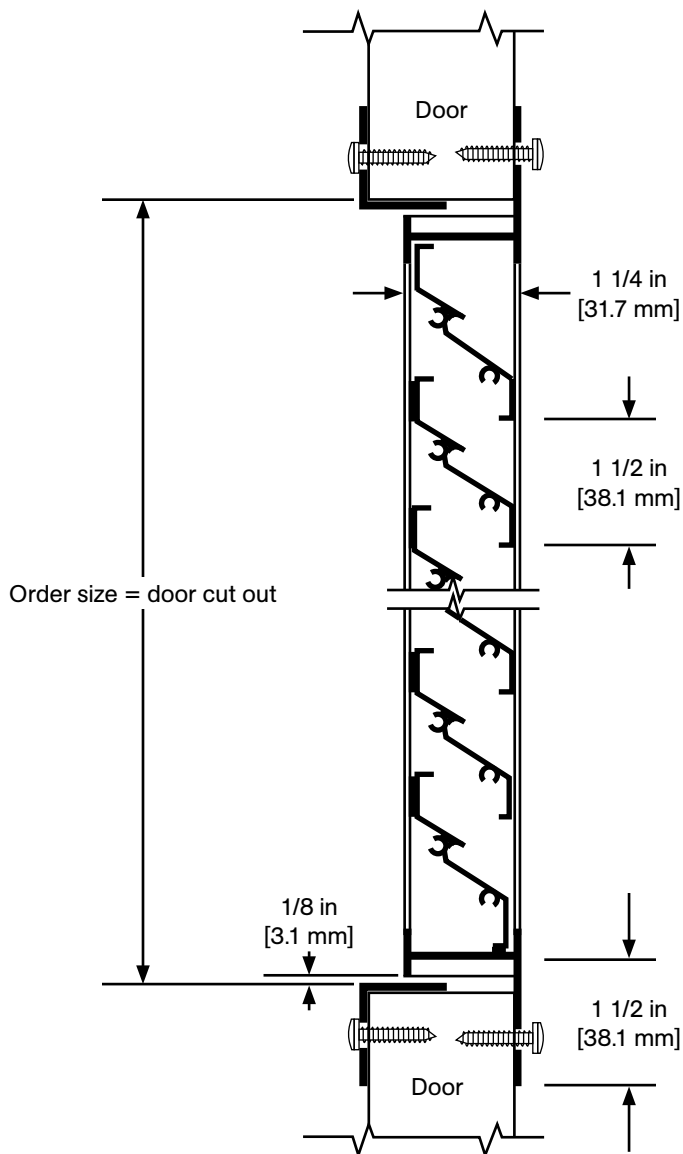

Options

Finish

Bronze or clear anodized
Special order colours. Please provide colour chip.

Fasteners

Security fasteners, please specify

Screen

18-14 mesh insect screen installed in roll formed aluminum frame.
Aluminum, bronze or fiberglass mesh available.

Size

_____ wide x _____ high _____ quantity
(door cut out size equals order size)