CFT-201-BP

KNC

FEATURES

- 600 lbs. [272 kg] weight capacity
- Delrin wheels and precision ball bearings provide smooth and quiet door operation
- Adjustable in-track stops
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design
- Also available in stainless steel (CFT-201-SS)

COMPLETE 1 DOOR KIT BREAKDOWN

1 - CFT-200-BP Flat Track
x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)

CFT-211-WB-BP Wall Mount Brackets
quantity dependent on track length
complete with 5/16-18 flat head socket lag screws and expansion shields

CFT-201-BP Top Mount Hangers
complete with anti-lift and custom mounting screws

- ◯ **2 hangers** for doors up to 300 lbs. [136 kg]
- ◯ **3 hangers** for doors up to 450 lbs. [204 kg]
- ◯ **4 hangers** for doors up to 600 lbs. [272 kg]

2 - CFT-210-BP Shock Absorbing Stops
clamp around flat track

1 - C-914 Aluminum Guide Channel
x length based on kit size (e.g. 36 in [914 mm] guide channel for 72 in [1829 mm] kit)

1 - C-913 Floor Guide
complete with screws

OPTIONAL

Door Locks & Pulls

Notes:

◯ Door thickness

◯ Baseboard/trim thickness, if applicable

Customer Name _____ **Job No./Name** _____ **Date** _____ **Provided By** _____

Notes

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1–866–999–1562 customerservice@kncrowder.com kncrowder.com
© 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.

CFT-201-BP

KNC

COMPLETE ELEVATION VIEW

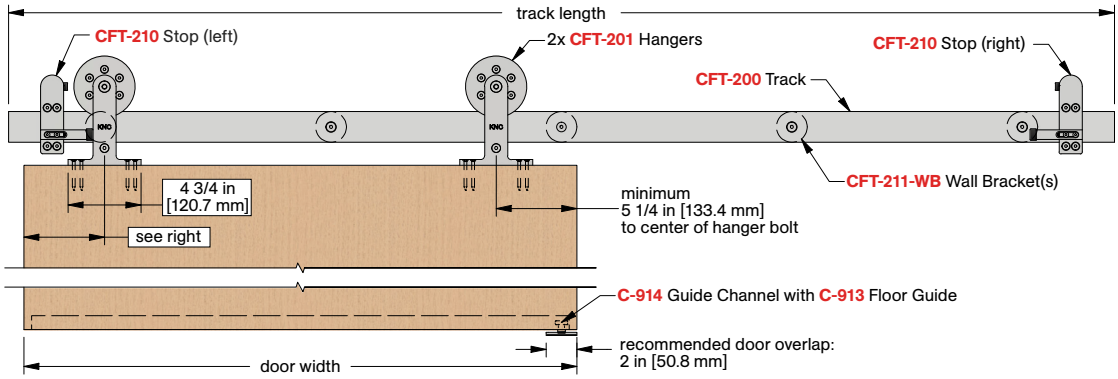

PRODUCT DIMENSIONS

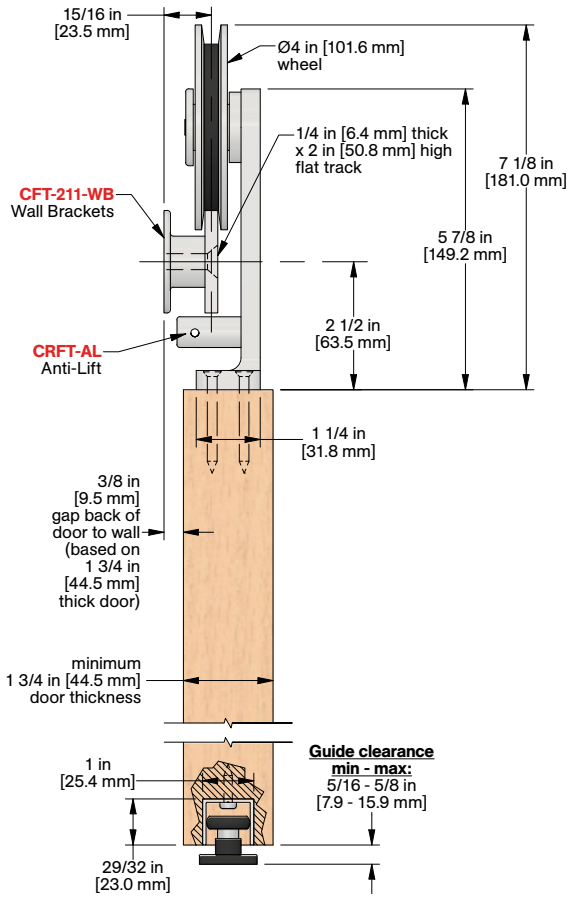

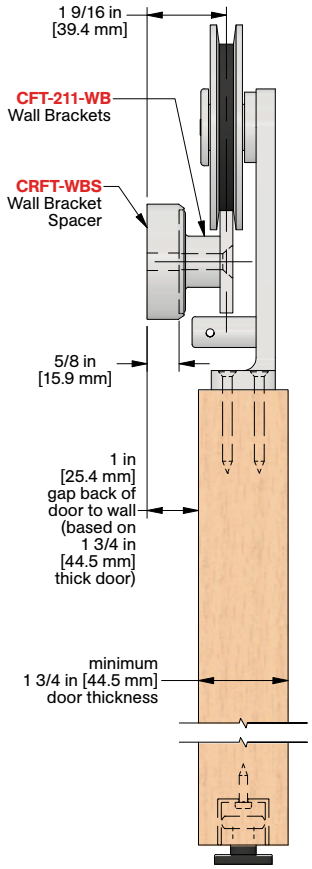

Installation Instructions

Customer Name _____ **Job No./Name** _____ **Date** _____ **Provided By** _____

Notes

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1–866–999–1562 customerservice@kncrowder.com kncrowder.com
© 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.