


CFT-202-38-CC-BP

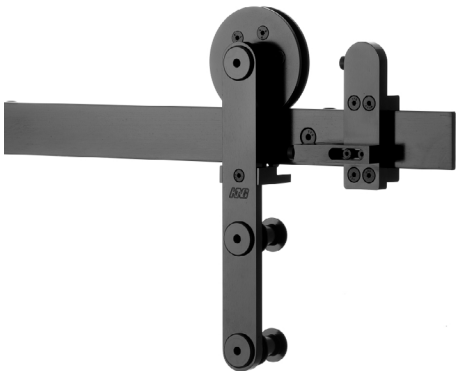

FEATURES

- 300 lbs. [136 kg] weight capacity
- Effortless opening and closing of the door with the Catch 'N' Close Closing System (for doors wider than 30 in [762 mm])
- Delrin wheels and precision ball bearings provide smooth and quiet door operation
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design
- Also available in stainless steel (CFT-202-38-CC-SS)
- For 1 3/8 in [34.9 mm] thick door

COMPLETE 1 DOOR KIT BREAKDOWN



- 1 - CFT-200-BP Flat Track**
x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)



- CFT-222-WB-BP Wall Mount Brackets**
quantity dependent on track length
complete with 5/16-18 flat head socket lag screws and expansion shields



- 2 - CFT-202-38-BP Strap Mount Hangers**
complete with anti-lift and custom mounting screws



- 2 - CFT-220-BP Shock Absorbing Stops**
clamp around flat track



- 1 - CFT-200-CC-BP Catch 'N' Close 1 Door Hardware**
complete with mounting bar, closing devices, anti-lift triggers and shorter wall mount brackets
- CC-75** for doors up to 75 lbs. [34 kg]
 - CC-1** for doors up to 150 lbs. [68 kg]
 - CC-2** for doors up to 200 lbs. [90 kg]
 - CC-3** for doors up to 300 lbs. [136 kg]



- 1 - C-914 Aluminum Guide Channel**
x length based on kit size (e.g. 36 in [914 mm] guide channel for 72 in [1829 mm] kit)
- 1 - C-913 Floor Guide**
complete with screws

OPTIONAL

Door Locks & Pulls



Notes:

Door thickness

Baseboard/trim thickness, if applicable


Customer Name	Job No./Name	Date	Provided By
<hr/>	<hr/>	<hr/>	<hr/>

Notes



CFT-202-38-CC-BP



COMPLETE ELEVATION VIEW

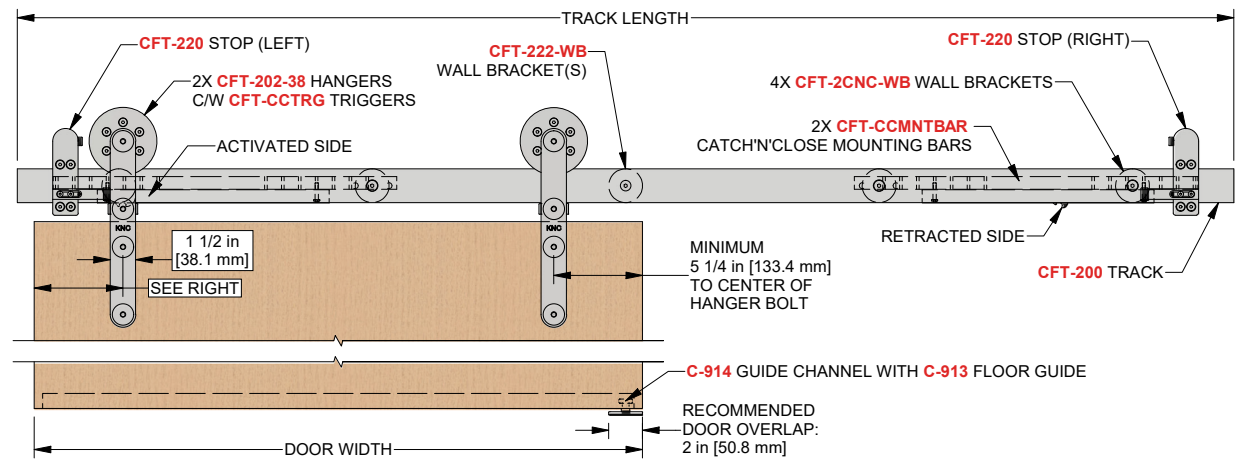

PRODUCT DIMENSIONS

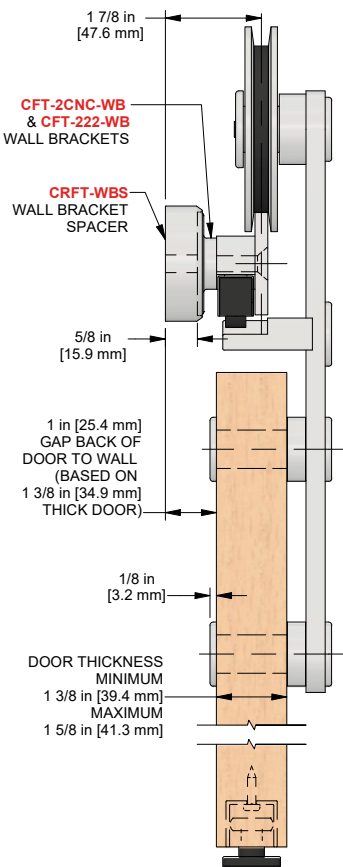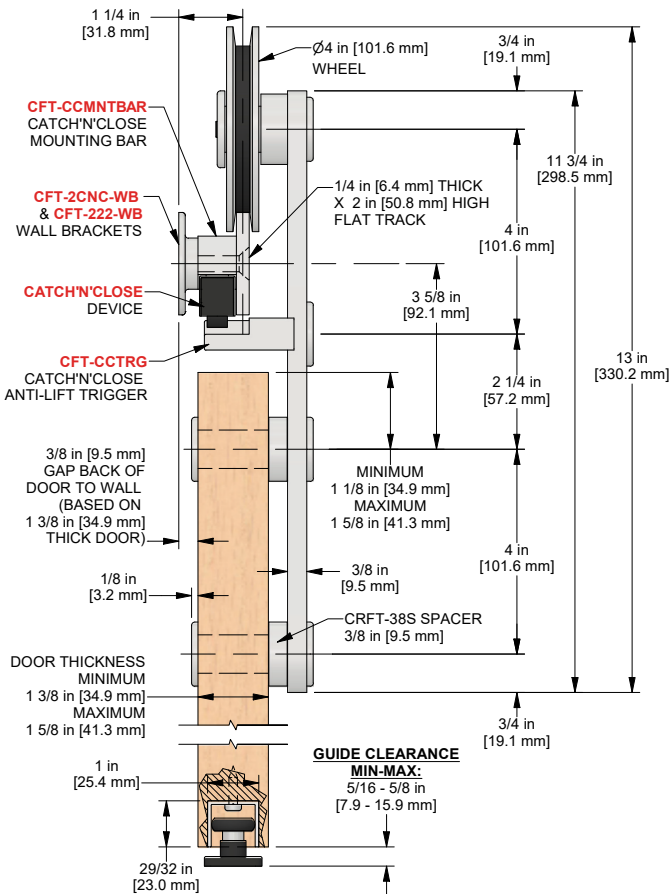

Installation Instructions



Customer Name	Job No./Name	Date	Provided By

Notes