



FEATURES

- 600 lbs. [272 kg] weight capacity
- Delrin wheels and precision ball bearings provide smooth and quiet door operation
- Adjustable in-track stops
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design
- Also available in black (CFT-202-38-BP)
- For 1 3/8 in [34.9 mm] thick door

COMPLETE 1 DOOR KIT BREAKDOWN

**1 - CFT-200-SS Flat Track**

x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)

**CFT-222-WB-SS Wall Mount Brackets**

quantity dependent on track length
complete with 5/16-18 flat head socket lag screws and expansion shields

**CFT-202-38-SS Strap Mount Hangers**

complete with anti-lift and custom mounting screws

2 hangers for doors up to 300 lbs. [136 kg]

3 hangers for doors up to 450 lbs. [204 kg]

4 hangers for doors up to 600 lbs. [272 kg]

**2 - CFT-220-SS Shock Absorbing Stops**

clamp around flat track

**1 - C-914 Aluminum Guide Channel**

x length based on kit size (e.g. 36 in [914 mm] guide channel for 72 in [1829 mm] kit)

**1 - C-913 Floor Guide**

complete with screws

OPTIONAL

Door Locks & Pulls**Notes:**

Door thickness

Baseboard/trim thickness, if applicable

Customer Name


Job No./Name

Date


Provided By

Notes

COMPLETE ELEVATION VIEW

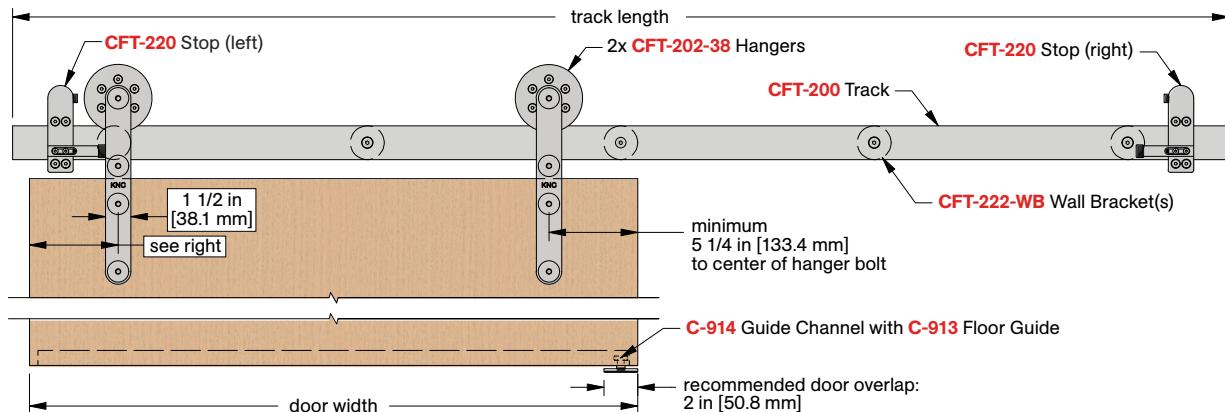

PRODUCT DIMENSIONS

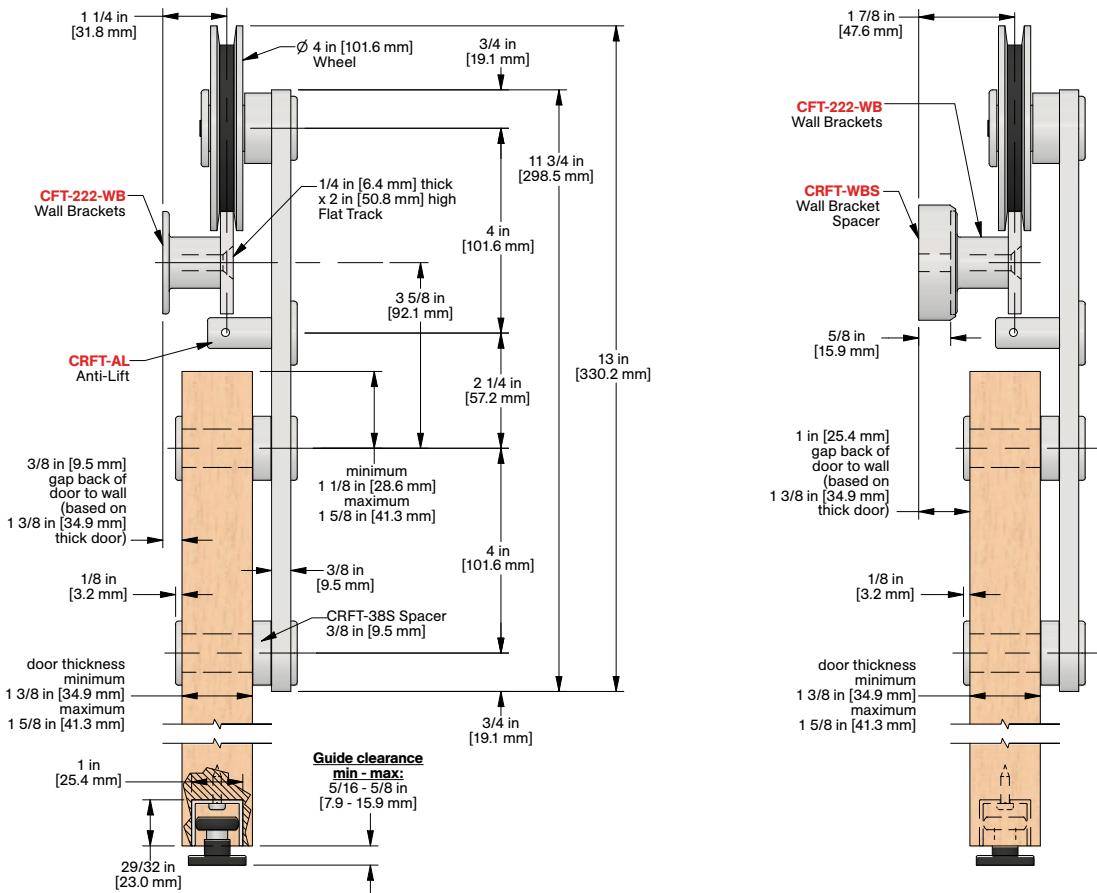

Installation Instructions



Customer Name

Job No./Name

Date

Provided By

Notes