



## FEATURES

- 600 lbs. [272 kg] weight capacity
- Delrin wheels and precision ball bearings provide smooth and quiet door operation
- Adjustable in-track stops
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design
- Also available in black (CFT-203-38-BP)
- For 3/8 in [10 mm] thick glass door

## COMPLETE 1 DOOR KIT BREAKDOWN



### 1 - CFT-200-SS Flat Track

x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)



### CFT-211-WB-SS Wall Mount Brackets

quantity dependent on track length  
complete with 5/16-18 flat head socket lag screws and expansion shields



### CFT-203-SS Strap Mount Hangers

complete with anti-lift and custom mounting screws

**2 hangers** for doors up to 300 lbs. [136 kg]

**3 hangers** for doors up to 450 lbs. [204 kg]

**4 hangers** for doors up to 600 lbs. [272 kg]



### 2 - CFT-210-SS Shock Absorbing Stops

clamp around flat track



### 1 - CGGS-038 Stationary Glass Guide

complete with screws

## OPTIONAL

### Door Locks & Pulls



### Notes:

Baseboard/trim thickness, if applicable

Customer Name


Job No./Name

Date



Provided By

Notes

## COMPLETE ELEVATION VIEW

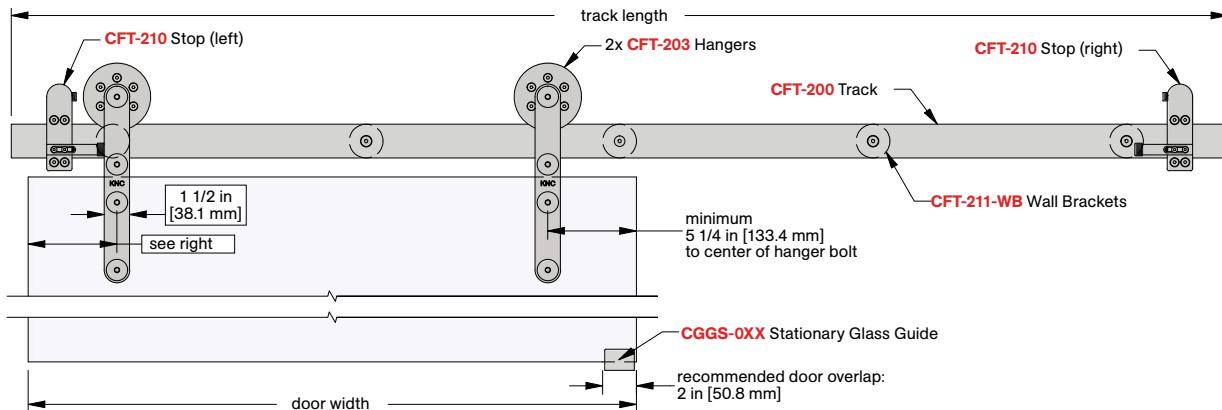

## PRODUCT DIMENSIONS

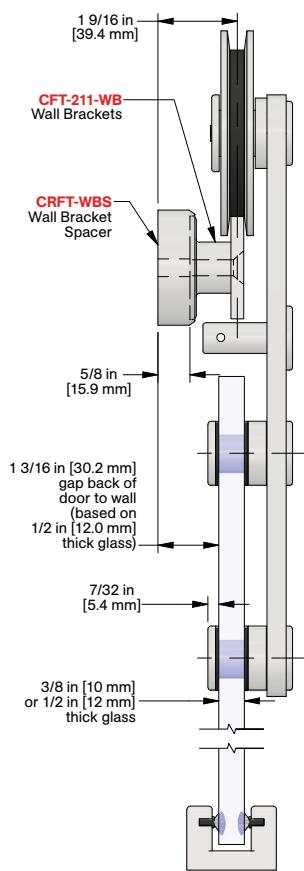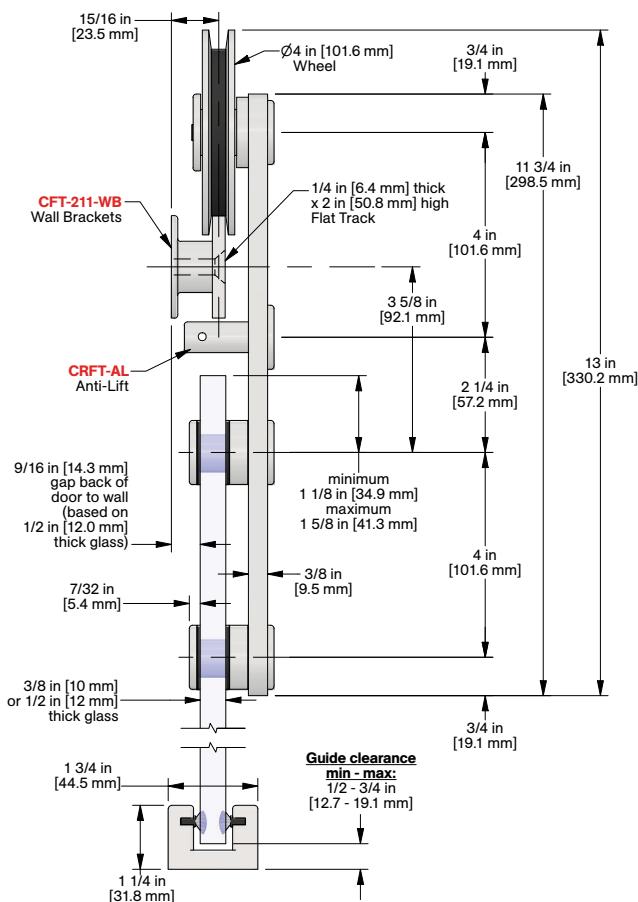

Installation  
Instructions



Customer Name

Job No./Name

Date

Provided By

Notes