
## T-GSP Single Flat Bar Glass Door Pull Installation Instructions




Suitable for 3/8 in [10 mm] to 1/2 in [12 mm] thick glass doors Available in 2 in [50.8 mm] x 18 in [457.2 mm] or 36 in [914.4 mm] flat bar door pull

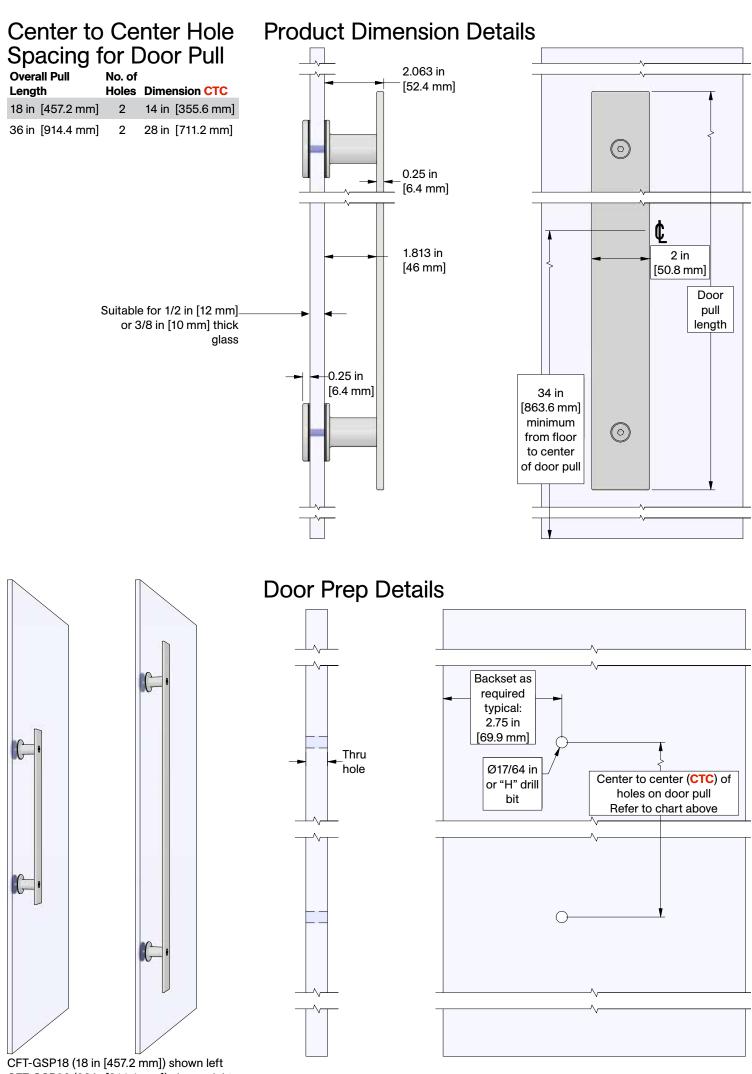

KNCROWDER.COM

CFT-GSP36 (36 in [914.4 mm]) shown right

## Parts' List

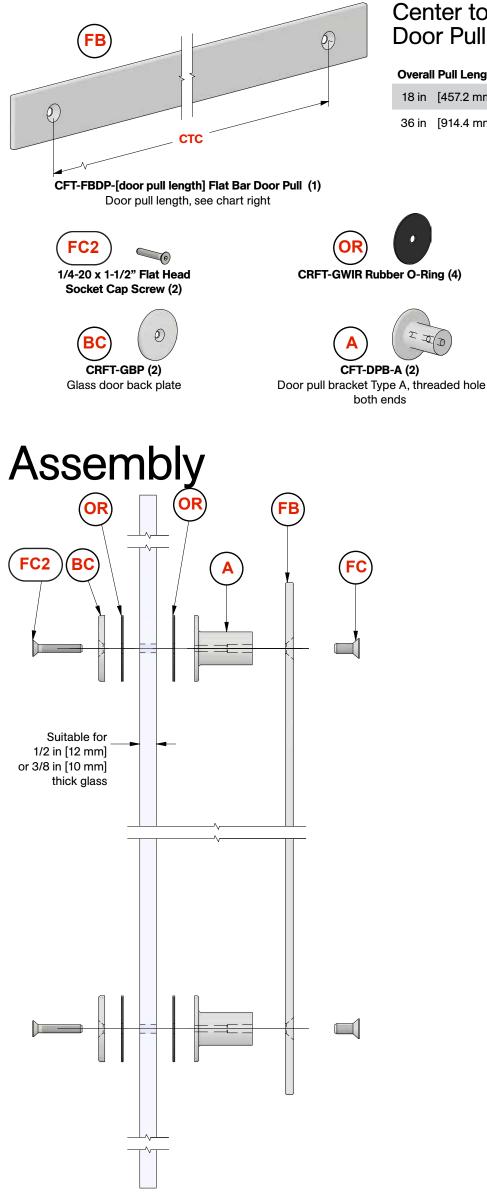

## Center to Center Hole Spacing for Door Pull

Overall Pull Length	No. of Holes	Dimension CTC
18 in [457.2 mm]	2	14 in [355.6 mm]
36 in [914.4 mm]	2	28 in [711.2 mm]

Ø

5/16-18 x 3/4" Flat Head Socket Cap Screw (2)

KN Crowder of the served.

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3 kncrowder.com

00