


CGGHD/CGG Series

Guide System


Installation Instructions

KNC

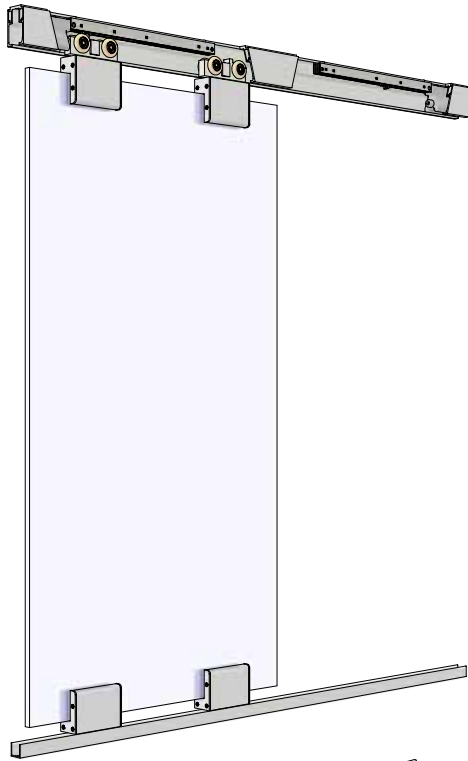


C-914 Guide Channel x length
Length = opening width + pocket

Parts List




CGGHD-[] Guide (2)

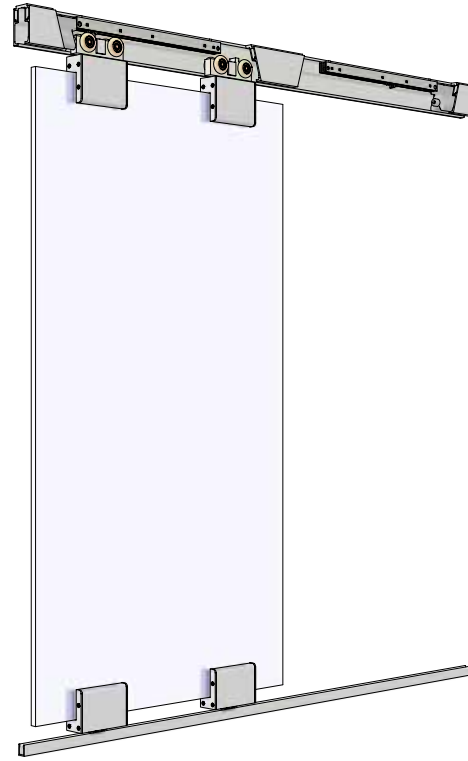


C-201 Guide Channel x length
Length = opening width + pocket


Parts List



CGG-[] Guide (2)

Disassembled Parts' List


 **3/8-16 Hex Jam Nut (2)**
[FT20]

 **#6-32 x 1/2" Flat Phillips Undercut Machine Screw for CGH-F (8)**
[FT49]

 **CGH-SEC Slotted End Cap (2)**

 **CGH Nylon Spacers (2)**


 **CGH-GB Glass Bolt (2)**


 **CGH-[] Rubber Boot (1)**

 **CGH-F Fascia (2)**

 **CGH Aluminum Guide Body with C-913 Guide (1)**

Disassembled Parts' List


 **3/8-16 Hex Jam Nut (2)**
[FT20]

 **#6-32 x 1/2" Flat Phillips Undercut Machine Screw for CGH-F (8)**
[FT49]

 **CGH-SEC Slotted End Cap (2)**

 **CGH Nylon Spacers (2)**

 **CGH-GB Glass Bolt (2)**


 **CGH-[] Rubber Boot (1)**

 **CGH-F Fascia (2)**


 **CGH Aluminum Guide Body with C-200 Guide (1)**

Product Details and Dimensions

Elevation View

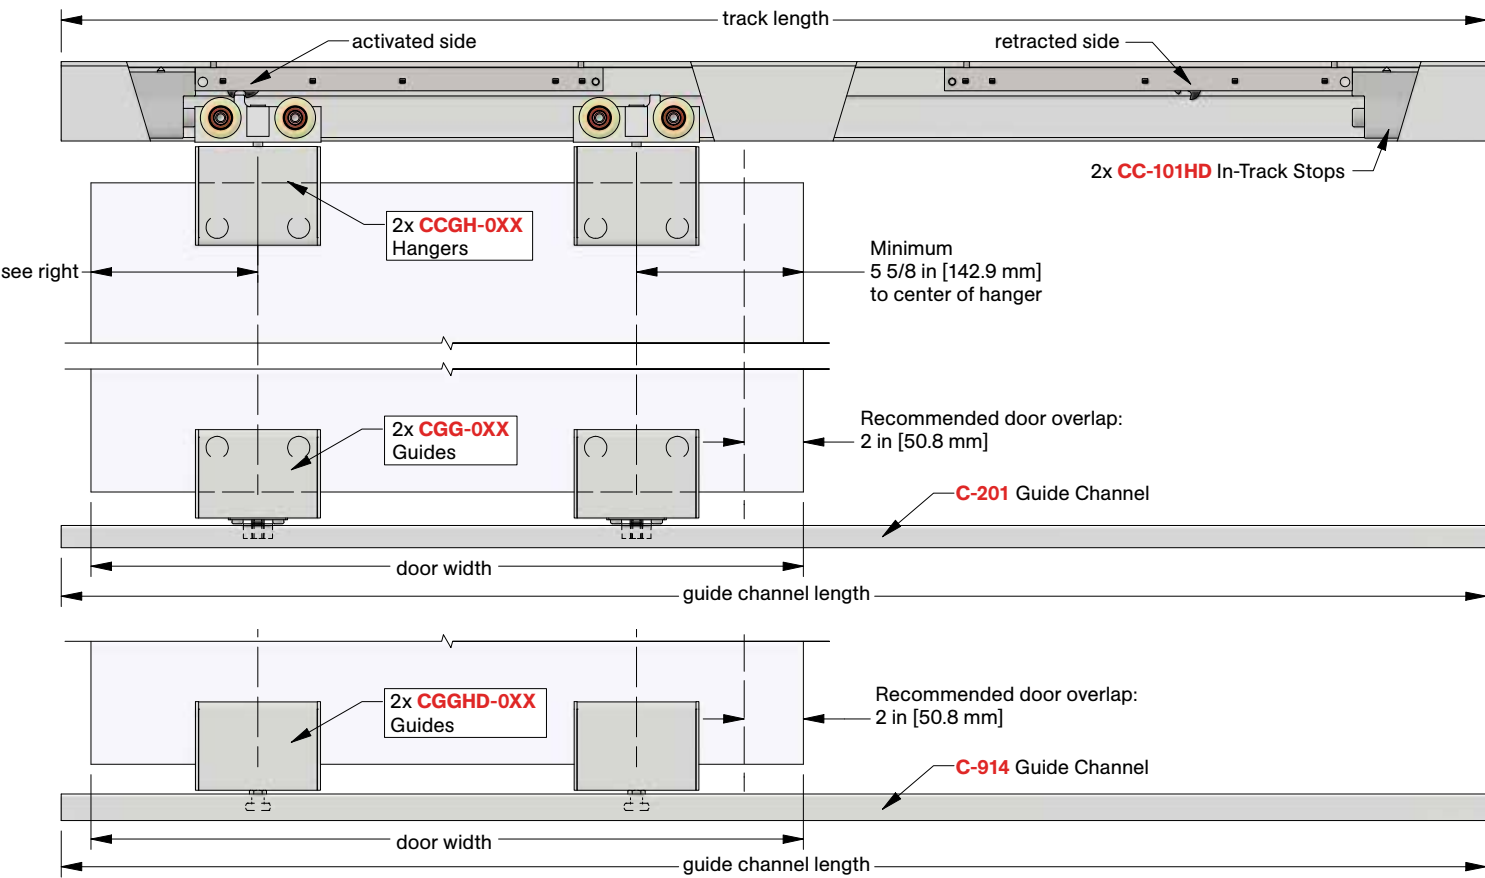



Section View

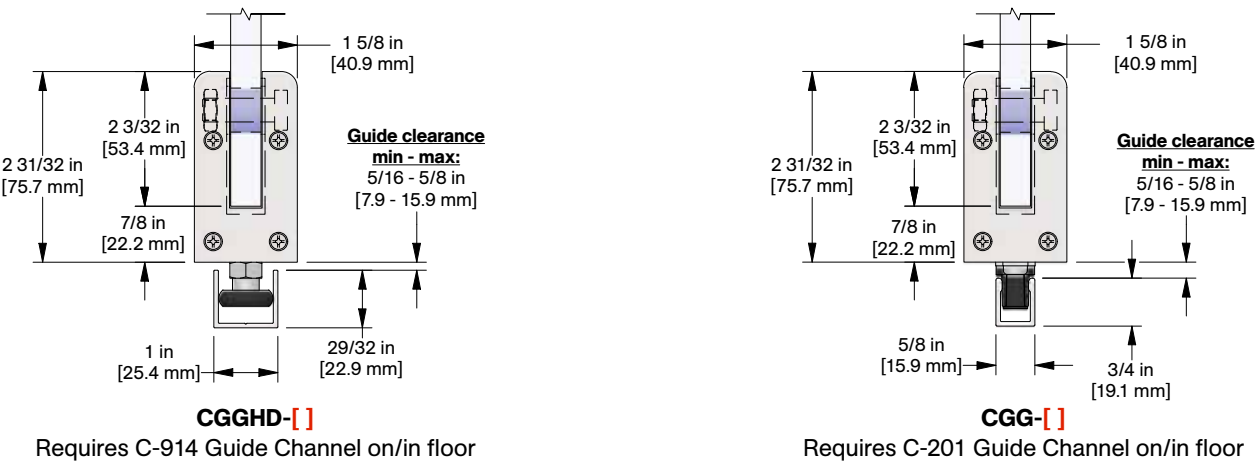

Installation Steps



Step #1:

Prepare glass door with holes per prep template on glass hanger instructions. Insert CGH Nylon Spacers in prep holes of glass door. Slip CGH-[] Rubber Boot over bottom edge of glass, then CGH Aluminum Guide Body over rubber boot. Align holes on rubber boot and hanger body with CGH Nylon Spacers and holes on glass door. See below.

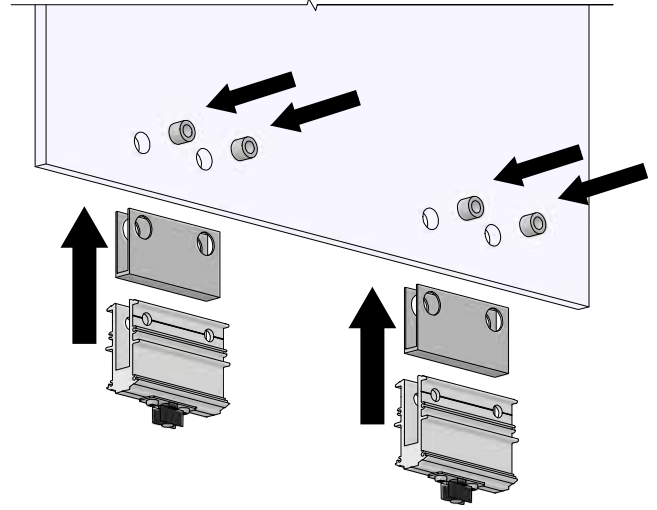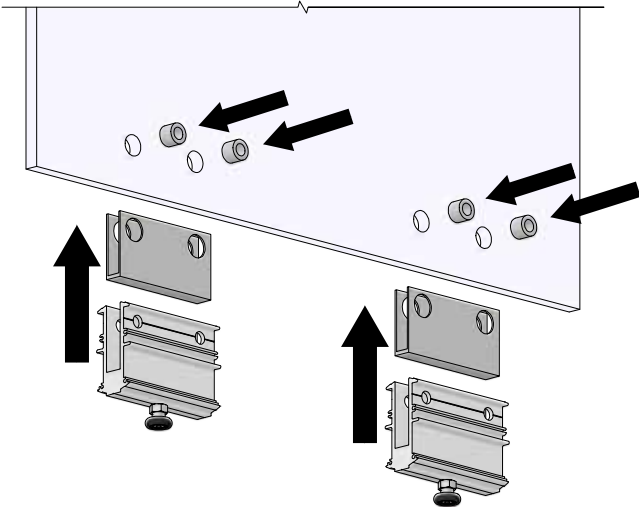

Step #2:



Thread (2) CGH-GB Glass Bolt through holes in glass and secure with 3/8-16 Hex Jam Nuts [FT20]. See below.

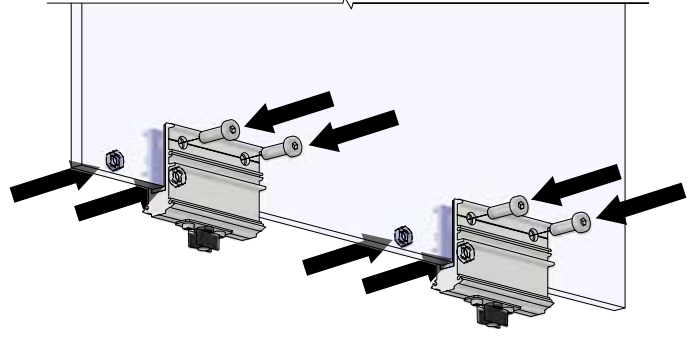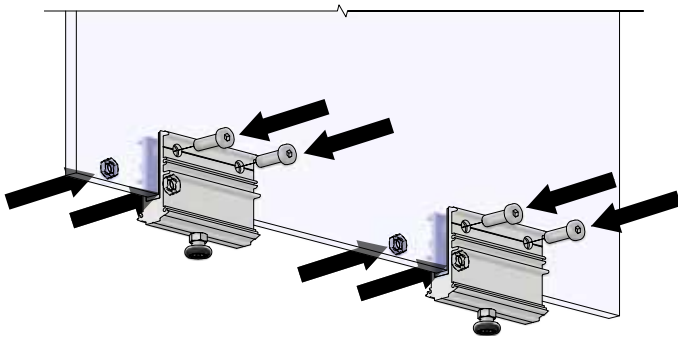

Step #3:



Cut C-201 or C-914 aluminum guide channel to size as required, typically same length as track from **step #2**. Position guide channel on floor or recessed in floor to line up with track above.

Note: The center line of groove in guide channel should line up with centerline of track above.

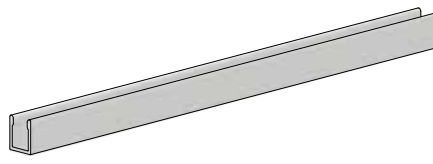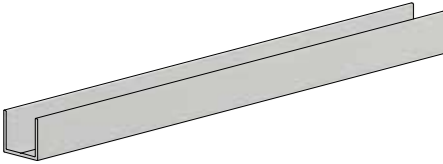


Step #4:

Raise door, position over guide channel, and under hangers in track. Refer to hanger instructions for door adjustments.



Step #5:

Snap CGH-F Fascia onto guide body, one per side. Place end caps onto ends of each guide and fasten with (4) #6-32 x 1/2" Flat Phillips Undercut Machine Screw [FT49].

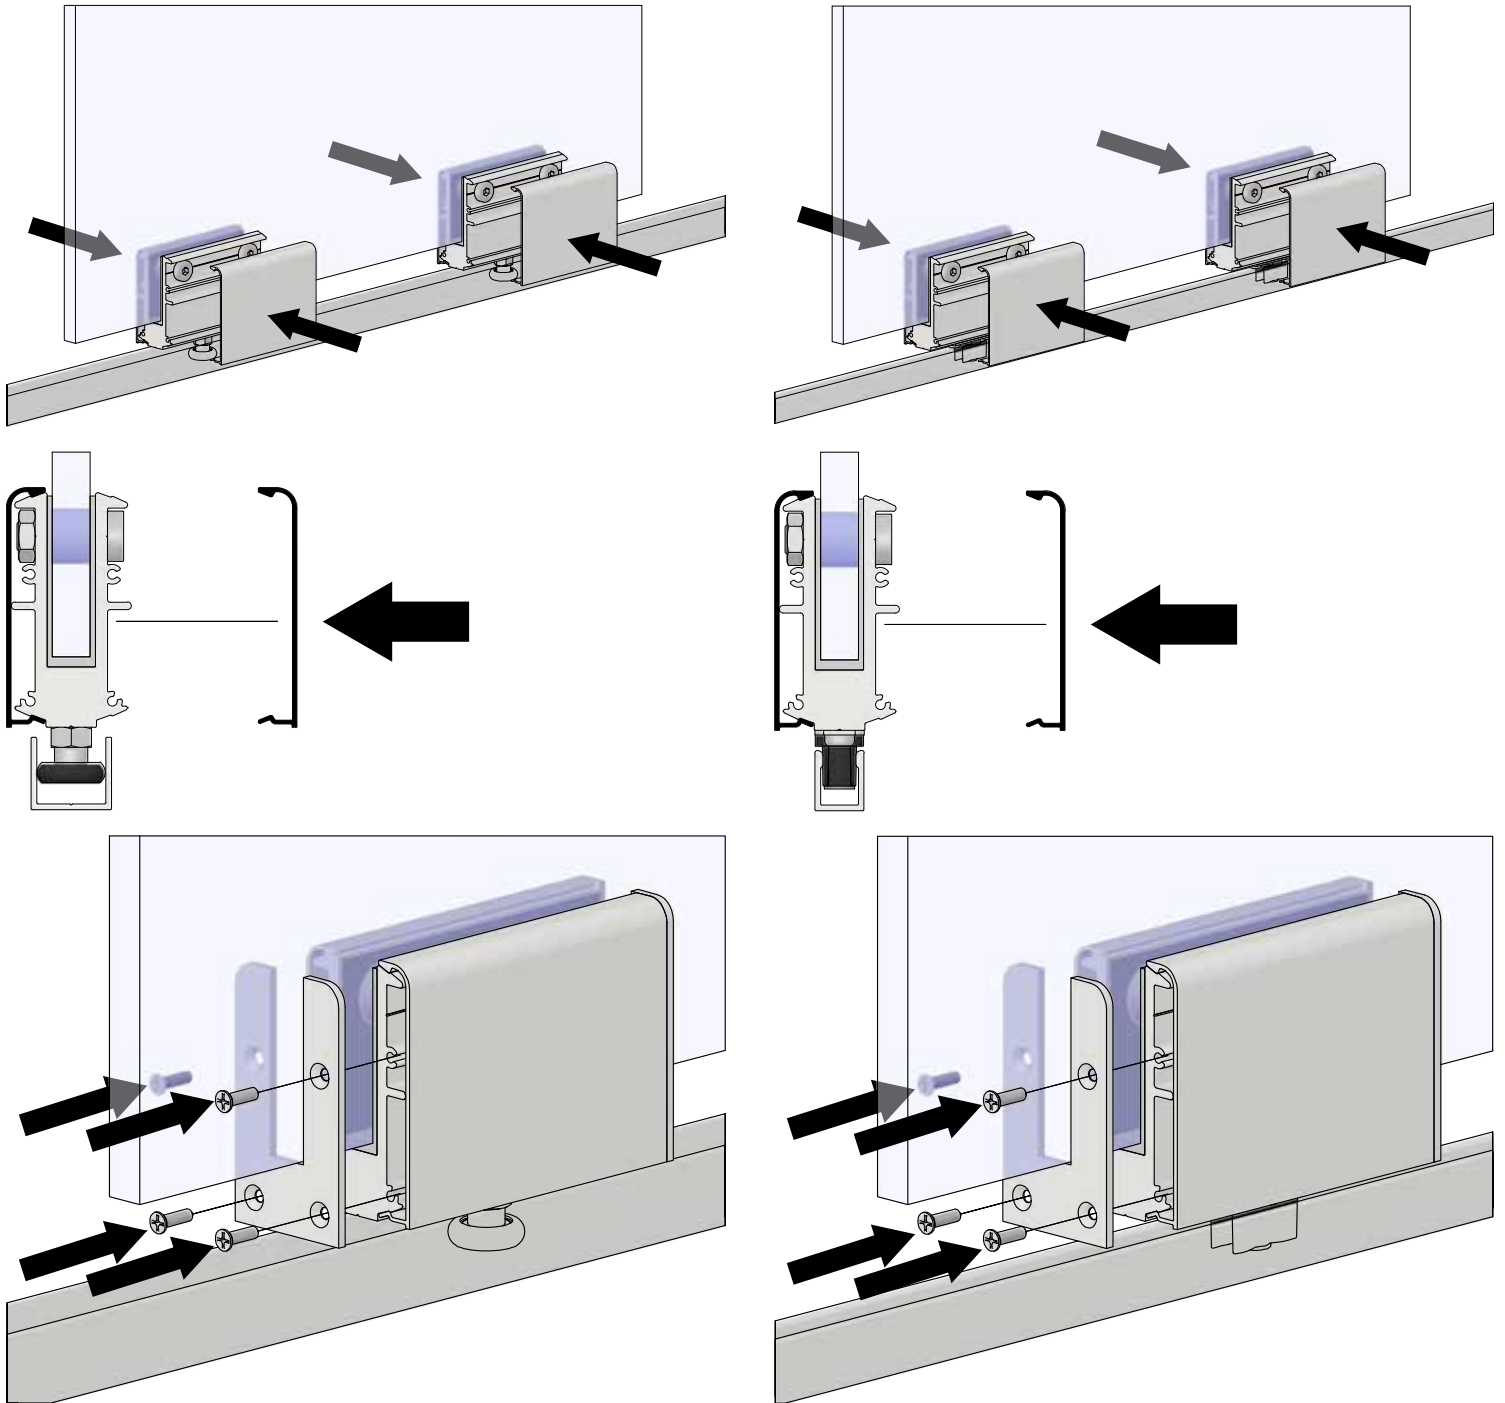**Step #6:**

Resume track and hardware installation.