CRT-101-SS





FEATURES

- 600 lbs. [272 kg] weight capacity
- Delrin wheels and precision ball bearings provide smooth and quiet door operation
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design
- Also available in black (CRT-101-BP)

COMPLETE 1 DOOR KIT BREAKDOWN



1 - CRT-100-SS Round Track

x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)



CRT-111-WB-SS Wall Mount Brackets

quantity dependent on track length complete with 5/16-18 flat head socket lag screws and expansion shields



CRT-101-SS Top Mount Hangers

complete with anti-lift and custom mounting screws

- 2 hangers for doors up to 350 lbs. [159 kg]
- 3 hangers for doors up to 450 lbs. [204 kg]
- 4 hangers for doors up to 600 lbs. [272 kg]



2 - CRT-110-SS Shock Absorbing Stops

clamp around flat track



1 - C-914 Aluminum Guide Channel

x length based on kit size (e.g. 36 in [914 mm] guide channel for 72 in [1829 mm] kit)

1 - C-913 Floor Guide

complete with screws

OPTIONAL

Door Locks & Pulls






Notes:

Door thickness

Baseboard/trim thickness, if applicable

Customer Name	Job No./Name	Date	Provided By


Notes




CRT-101-SS




COMPLETE ELEVATION VIEW

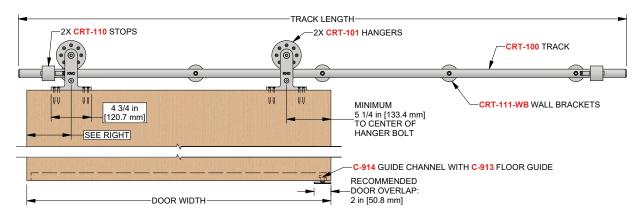

PRODUCT DIMENSIONS

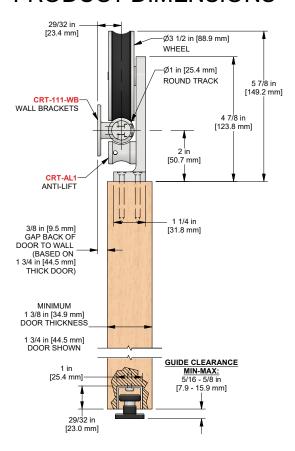

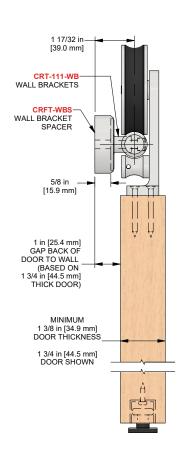

Installation Instructions



Customer Name Job No./Name **Date Provided By**

Notes

