CRT-51-BP



FEATURES

- 175 lbs. [79 kg] weight capacity
- Delrin wheels and precision ball bearings provide smooth and quiet door operation
- Adjustable in-track stops
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design
- Also available in stainless steel (CRT-51-SS)

COMPLETE 1 DOOR KIT BREAKDOWN



1 - CRT-50-BP Round Track

x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)



CRT-11-WB-BP Wall Mount Brackets quantity dependent on track length complete with 5/16-18 flat head socket lag screws and expansion shields



complete with anti-lift and custom mounting screws

2 - CRT-51-BP Top Mount Hangers



- 2 CRT-50-BP Shock Absorbing Stops clamp around flat track
- C-914 Aluminum Guide Channel x length based on kit size (e.g. 36 in [914 mm] guide channel for 72 in [1829 mm] kit)
 C-913 Floor Guide complete with screws





Notes:

Door thickness

Baseboard/trim thickness, if applicable

Customer Name

Job No./Name

Date


Provided By

Notes

KN Crowder Canada, L7L 6B3 T. 1–866–999–1562 customerservice@kncrowder.com kncrowder.com © 2020-2025 K.N. Crowder Mfg. Inc. All Rights Reserved.


CRT-51-BP

COMPLETE ELEVATION VIEW

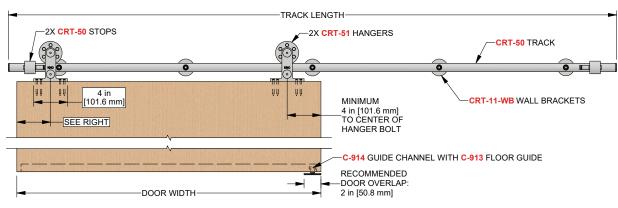

KNC

PRODUCT DIMENSIONS

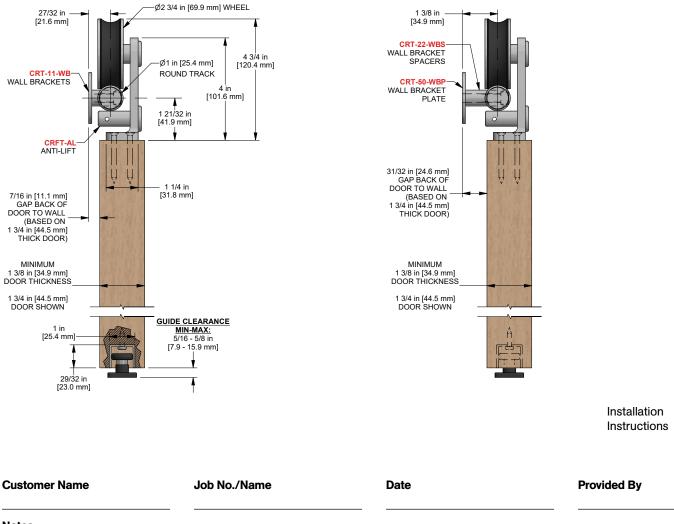

Notes

KN Crowder of the served. 1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3 T. 1–866–999–1562 customerservice@kncrowder.com kncrowder.com © 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.