


CRT-51-SS

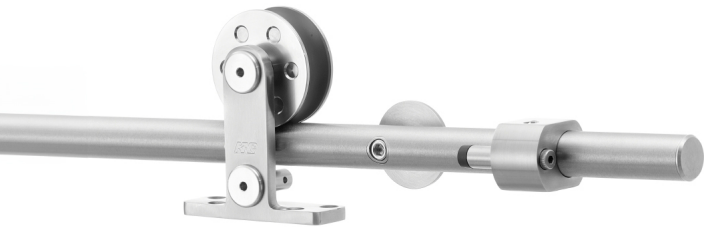

FEATURES

- 175 lbs. [79 kg] weight capacity
- Delrin wheels and precision ball bearings provide smooth and quiet door operation
- Adjustable in-track stops
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design
- Also available in black (CRT-51-BP)

COMPLETE 1 DOOR KIT BREAKDOWN



- 1 - CRT-50-SS Round Track**
x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)



- CRT-11-WB-SS Wall Mount Brackets**
quantity dependent on track length
complete with 5/16-18 flat head socket lag screws and expansion shields



- 2 - CRT-51-SS Top Mount Hangers**
complete with anti-lift and custom mounting screws



- 2 - CRT-50-SS Shock Absorbing Stops**
clamp around flat track



- 1 - C-914 Aluminum Guide Channel**
x length based on kit size (e.g. 36 in [914 mm] guide channel for 72 in [1829 mm] kit)

- 1 - C-913 Floor Guide**
complete with screws

OPTIONAL

Door Locks & Pulls



Notes:

Door thickness

Baseboard/trim thickness, if applicable


Customer Name	Job No./Name	Date	Provided By
<hr/>	<hr/>	<hr/>	<hr/>

Notes


CRT-51-SS



COMPLETE ELEVATION VIEW

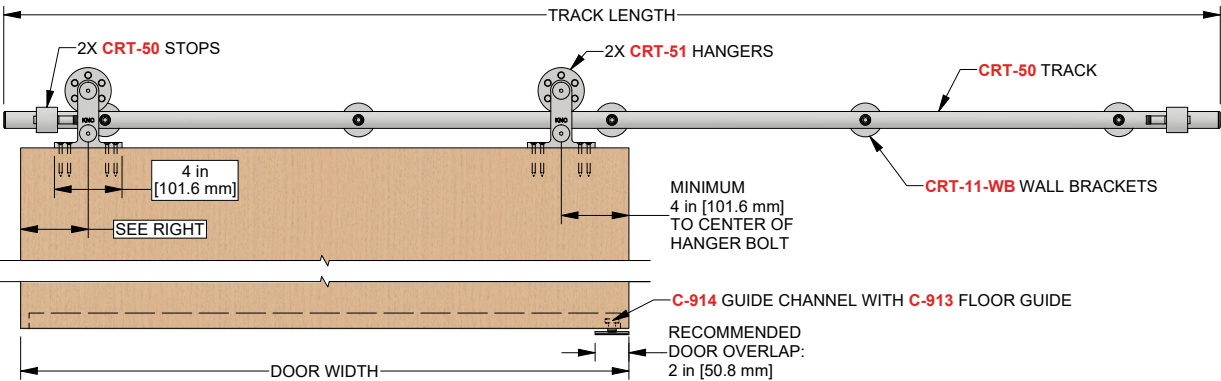

PRODUCT DIMENSIONS

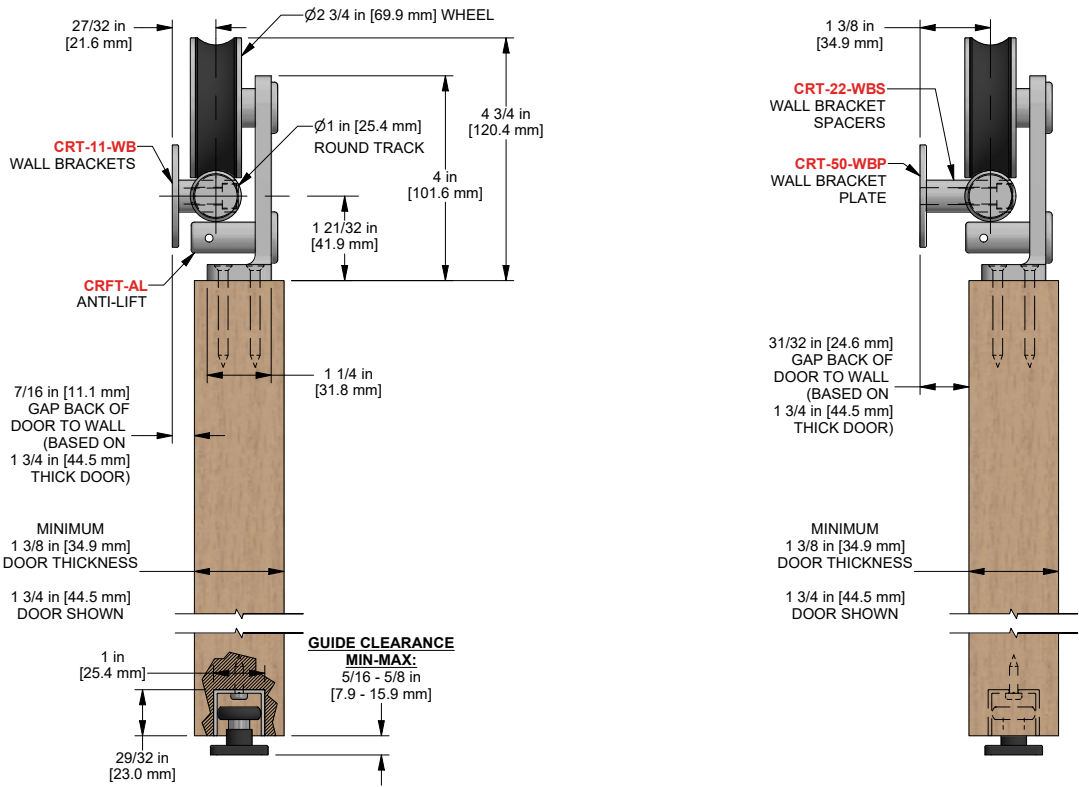

Installation
Instructions



Customer Name	Job No./Name	Date	Provided By

Notes