CT-108 & CT-109 NEW

KNC

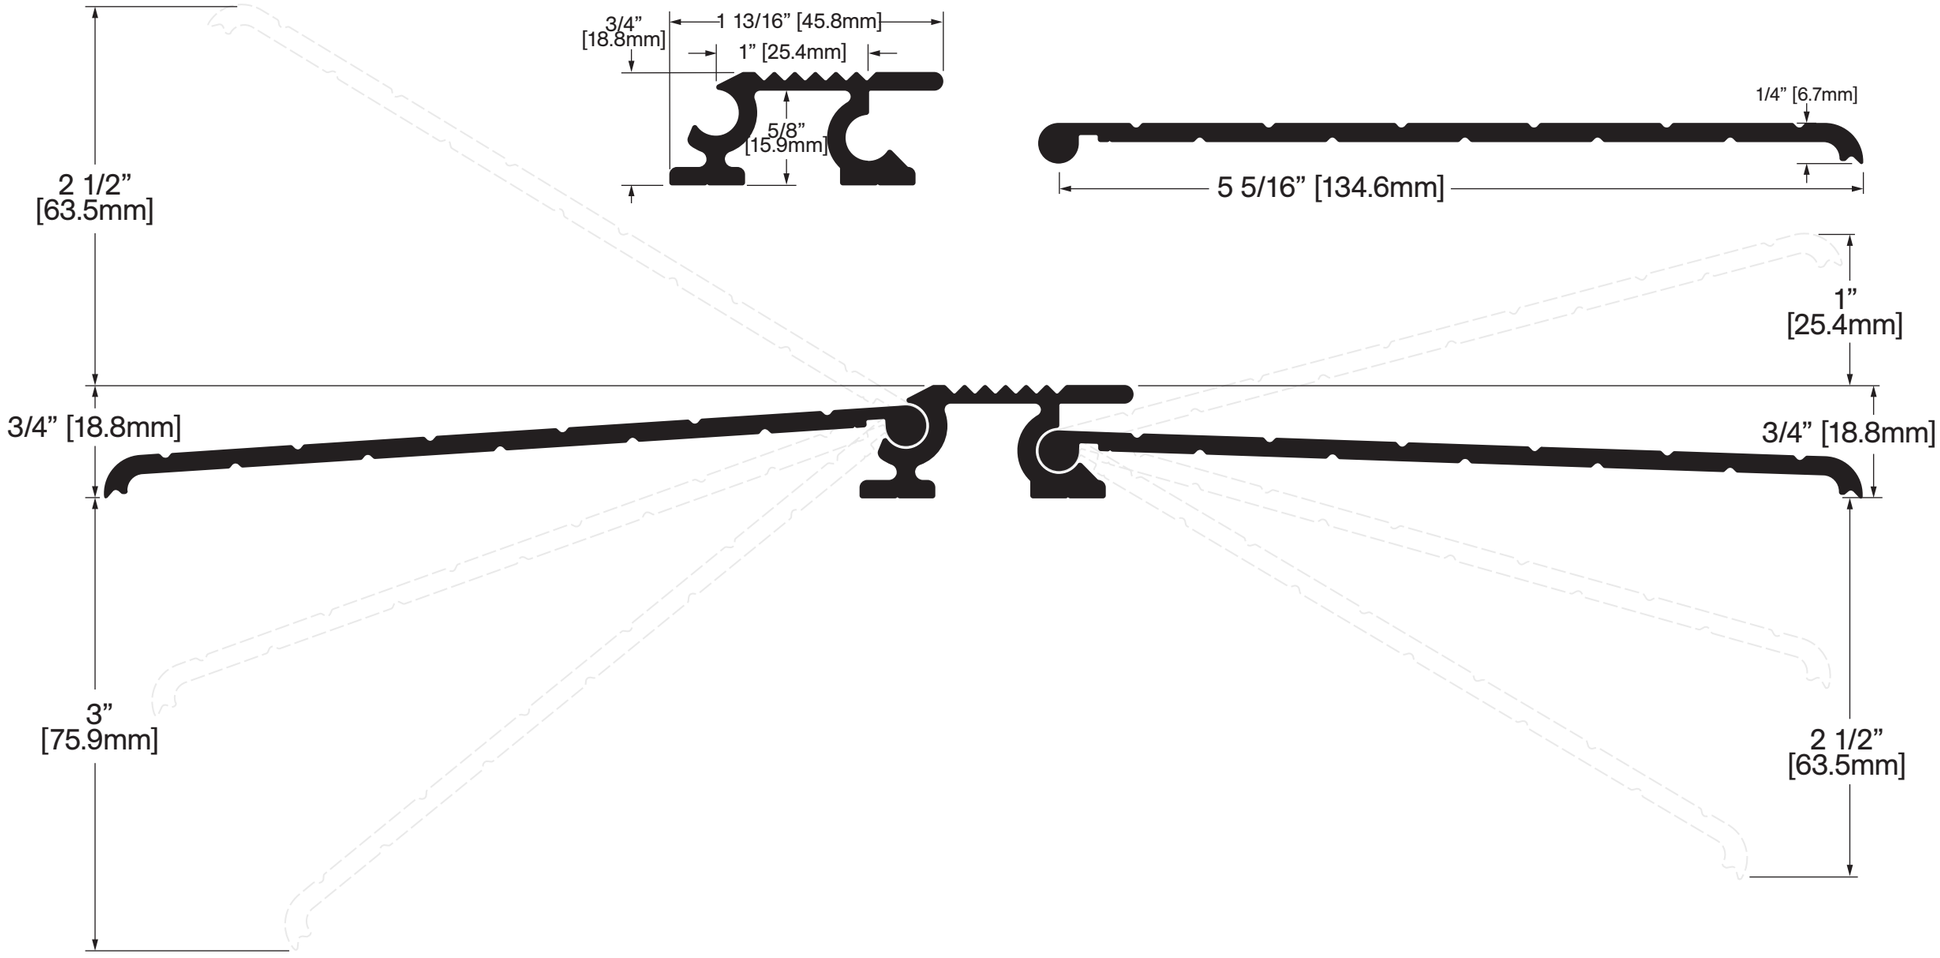

FINISHES

STD
- Mill Finish

OPT
- Bronze Anodized
- Black Anodized
- Clear Anodized
- Special _____

SCREW OPTIONS

Standard



Screw Type: G
3/16” X 1-3/4” Hi-Lo Tapping Thread, Grey Phillips/Robertson Combo Drive, Concrete Screws
(5/32” pre-drill required)

Optional



Screw Type: H
#10 X 1-3/4” Stainless Steel Flat Head, Robertson Drive, Type A Screws
(complete with nylon anchor)



Screw Type: I
#10 X 2” Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws
(complete with nylon anchor)

Operation: Threshold
Features: Mill Finish Extruded Aluminum
Application: Ideal for Residential, Commercial & Industrial
Ideal for openings with different floor heights applications
Can be used with a CT-109 on one side or both sides of the CT-108
Maximum Length: 144 in [3658 mm]

Customer Name _____ **Job No./Name** _____ **Date** _____ **Provided By** _____

Notes

KN Crowder
1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1—866—999—1562 customerservice@kncrowder.com kncrowder.com
© 2020-2025 K.N. Crowder Mfg. Inc. All Rights Reserved.