


CT-16

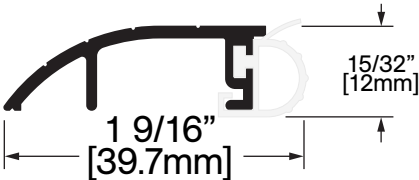

Operation: Stop Strip
Features: Mill Finish Extruded Aluminum with Vinyl
Application: Ideal for Residential, Commercial & Industrial
Maximum Length: 144 in [3658 mm]




Customer Name	Job No./Name	Date	Provided By
<hr/>	<hr/>	<hr/>	<hr/>
Notes			

FINISHES

OPTSTD

Mill Finish	
Special	<hr/>

SCREW OPTIONS

Standard	
	Screw Type: G 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" pre-drill required)
Optional	
	Screw Type: H #10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (complete with nylon anchor)
	
	Screw Type: I #10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (complete with nylon anchor)