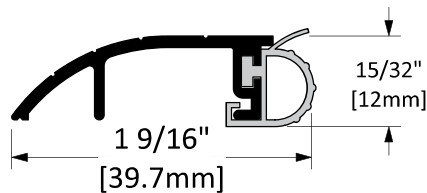


# CT-16




**Finish Options**


**STD** Mill Finish


**Screw Options**

**Standard**

 Screw Type: **G**  
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" Pre-Drill Required)

**Optional**

 Screw Type: **H**  
 #10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (Complete with Nylon Anchor)

 Screw Type: **I**  
 #10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (Complete with Nylon Anchor)

<b>Operation</b>	Stop Strip
<b>Features</b>	• Mill Finish Extruded Aluminum with Vinyl
<b>Application</b>	• Ideal for Residential, Commercial & Industrial

**Customer Name:** \_\_\_\_\_ **Job No./Name:** \_\_\_\_\_ **Date:** \_\_\_\_\_ **Provided By:** \_\_\_\_\_

**Notes:**