


CT-21/2A

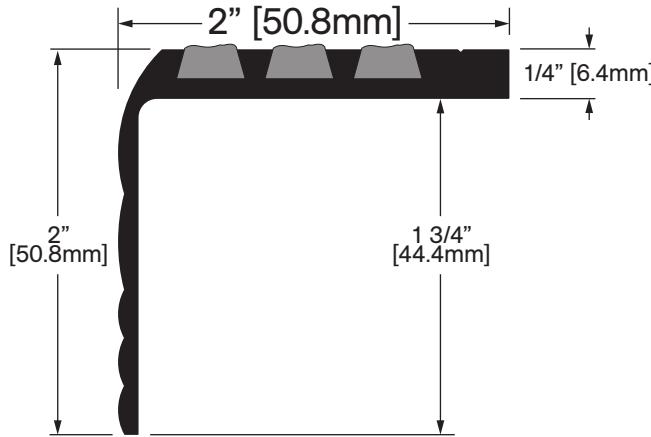

Operation: Stair Nosing

Features: Mill Finish Extruded Aluminum with Aluminum Oxide Grit in Epoxy Base

Application: Ideal for Residential, Commercial & Industrial

Maximum Length: 216 in [5486 mm]


FINISHES

Mill Finish


Special _____

OPT STD


SCREW OPTIONS



Standard
Screw Type: G
3/16" X 1-3/4" Hi-Lo Tapping Thread,
Grey Phillips/Robertson Combo Drive,
Concrete Screws
(5/32" pre-drill required)



Optional
Screw Type: H
#10 X 1-3/4" Stainless Steel Flat Head,
Robertson Drive, Type A Screws
(complete with nylon anchor)



Screw Type: I
#10 X 2" Stainless Steel Flat
Head, Tamper-Resistant Torx
Drive, Type A Screws
(complete with nylon anchor)

Customer Name _____

Job No./Name _____

Date _____

Provided By: _____

Notes _____

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com
© 2020-2025 K.N. Crowder Mfg. Inc. All Rights Reserved.