


## CT-21/5

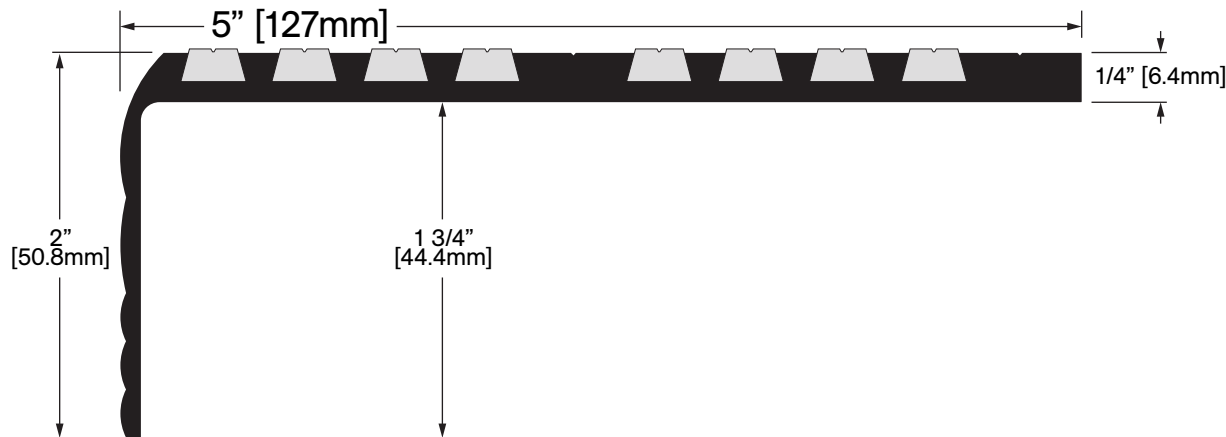

**Operation:** Stair Nosing

**Features:** Mill Finish Extruded Aluminum with Lanel Insert (P.V.C.)

**Application:** Ideal for Residential, Commercial & Industrial

**Maximum Length:** 216 in [5486 mm]

## FINISHES


OPT STD

Mill Finish

Special \_\_\_\_\_

## SCREW OPTIONS


Standard



Screw Type: G

3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" pre-drill required)

Optional



Screw Type: H

#10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (complete with nylon anchor)



Screw Type: I

#10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (complete with nylon anchor)

Customer Name

Job No./Name

Date

Provided By:

Notes