


CT-33



KNC

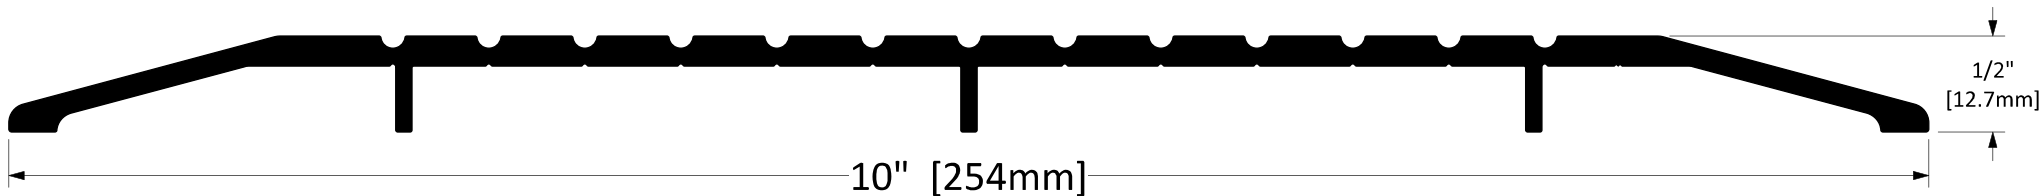

| | |
|-------------|--|
| Operation | Threshold |
| Features | <ul style="list-style-type: none">Mill Finish Extruded Aluminum |
| Application | <ul style="list-style-type: none">Ideal for Residential, Commercial & Industrial |

Finish Options

STD
Mill Finish

Screw Options

Standard
Screw Type: **G**
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws
(5/32" Pre-Drill Required)

Optional
Screw Type: **H**
#10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws
(Complete With Nylon Anchor)

Screw Type: **I**
#10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws
(Complete With Nylon Anchor)

Customer Name: Job No./Name: Date: Provided By:

Notes:

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1—866—999—1562 customerservice@kncrowder.com kncrowder.com
© 2020-2022 K.N. Crowder Mfg. Inc. All Rights Reserved.