

CT-410-2




FINISHES

Mill Finish

Special _____


OPT STD

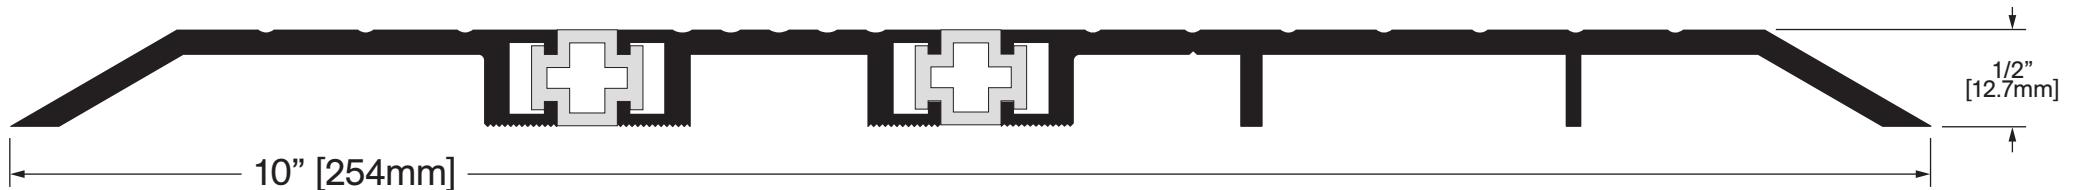


SCREW OPTIONS



Standard
Screw Type: G
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
Phillips/Robertson Combo Drive, Concrete Screws
(5/32" pre-drill required)



Optional
Screw Type: H
#10 X 1-3/4" Stainless Steel Flat Head, Robertson
Drive, Type A Screws
(complete with nylon anchor)



Screw Type: I
#10 X 2" Stainless Steel Flat Head,
Tamper-Resistant Torx Drive, Type A Screws
(complete with nylon anchor)

Operation: Thermal Break Threshold
Features: Mill Finish Extruded Aluminum

Insert included

Application: Ideal for Residential, Commercial & Industrial**Maximum Length:** 192 in [4877 mm]

Customer Name _____

Job No./Name _____

Date _____

Provided By _____

Notes _____

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com
© 2020-2025 K.N. Crowder Mfg. Inc. All Rights Reserved.