


CT-42N NEW

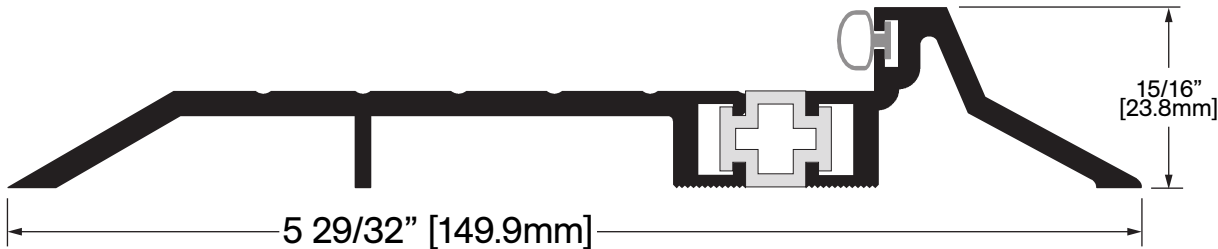

Operation: Thermal Break Threshold
Features: Mill Finish Extruded Aluminum with Neoprene Insert included
Application: Ideal for Residential, Commercial & Industrial
Maximum Length: 192 in [4877 mm]

OPT STD

FINISHES

Mill Finish
Special _____

SCREW OPTIONS

Standard



Screw Type: G
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" pre-drill required)

Optional



Screw Type: H
#10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (complete with nylon anchor)



Screw Type: I
#10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (complete with nylon anchor)

Customer Name	Job No./Name	Date	Provided By:
_____	_____	_____	_____
Notes			